

Dissertation on

"Tinker RL Lab: Post-Training of Large Language Models"

A multi-framework training harness and studies of GRPO signal starvation

PES EVALUATION REVIEW COPY ARS-CORRECTED REVISION 19 October 2026

Submitted in partial fulfilment of the requirements for the award of the degree of

Master of Technology

in

Data Science and Machine Learning

UE20CS972 – Project Phase – 2

Submitted by:

Arvind C R

Under the guidance of

Ramesh Prakash Guledgudd

May 2026 – October 2026

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

FACULTY OF ENGINEERING

PES UNIVERSITY

(Established under Karnataka Act No. 16 of 2013)
Electronic City, Hosur Road, Bengaluru – 560 100, Karnataka, India

Evaluation Review Revision Record

ARS-corrected revision, 19 October 2026 (this copy). This copy shrinks headline claim language to the tier the body already establishes, after the 19 October 2026 ARS panel review. It adds no training, benchmark evaluation, or invented number or reference; preserved numbers are unchanged unless re-derived in the body. It supersedes nothing institutionally: the frozen 11 October 2026 export remains untouched and separately preserved, and this copy's status is *pending independent human review of these exact bytes*. Checksums and quality receipts for this 19 October copy are pending and are *not* regenerated here; the 11 October receipts do not certify this copy. The public-checkout number audit for the 11 October sources records 970 registered occurrences: 828 PASS, 22 CONTEXT (context-only, not independently checked), and 120 ARTIFACT_MISSING, status INCOMPLETE; 33 of the 828 are arithmetic from printed counts, not raw recomputation. Actor-dependent campaign results are labelled *stored-evidence, not replayed* throughout. Author-only items (PES AI-declaration confirmation, collaborator authorisation and a countersigned contribution matrix, independent review of these exact bytes, blind human rating of the 11 C1 event cases, and checksum regeneration for this copy) are listed as AUTHOR_TODO in the accompanying `AUTHOR_TODO.md` and are not asserted as done.

This 11 October 2026 review copy derives from the 3 October coverage-recovery manuscript and incorporates the 4 October draft's five numerical and provenance corrections. Appendix J distinguishes artifact comparisons, arithmetic from printed counts and context-only occurrences. No new training or benchmark evaluation was performed, and no frozen source, reference label, cohort selection or primary score was changed. Historical releases remain separate and unchanged.

This public derivative omits operational and account identifiers, access correspondence, financial details, signature images and student registration data. Private provider exports and recovery archives are not bundled. It is not a certified institutional submission and does not carry the historical certificate. Six recovered original files resolved five primary-file gaps; the scientific recovery conclusions and E14 denominator correction remain, with inclusion and withholding boundaries in Appendix I and the public availability manifest.

The C1 extension (Sections 1.5, 4.6, 7.5, 9.3 and B.13; Appendix G) retains the frozen 11/64 endpoint (17.19%; Wilson 95% interval 9.88–28.21%) beside three conservatively corroborated numerical witnesses on the same denominator. Reference errors, ambiguities and unit mismatches limit interpretation; neither count is a training gain. The ledger retains classifications, hashes and disagreements, and historical V2 remains separate. Appendix H maps the evidence and distinguishes bundled content from retained external sources. Appendix A corrects registry scope and P11 evidence-tier wording without changing experimental values.

Later ESA documentation corrections. This derivative corrects the registry description in Section 7.2 and further source-scope, controller, statistical and figure wording documented in Appendices E.2–E.3. The original 312-page review PDF remains preserved separately. No frozen research result was changed. New software checks belong to the separate ESA companion; the updated numerical registry certifies only its declared bindings.

Declaration

I declare that this project report is my own work. Where the work of others has been used, it is cited and acknowledged. The matter embodied in this report has not been submitted, in part or in full, to this or any other university or institution for the award of any other degree or diploma.

The multi-framework benchmark infrastructure, the baseline framework integrations, and the initial GRPO/PPO/DPO experimentation were produced by the Semester-3 project group, of which I was a member, and are inherited here as the shared foundation. The research direction, the experimental expansion, the statistical analyses, the P1–P8 internal reports, the reporting and registry artefacts, the adaptive group-size controller, the applied fraud study, and the E1–E14 evaluation campaign reported in this document are my individual contribution, carried out under the guidance of my project guide.

Quantitative results are tied to named evidence. Appendix B distinguishes recovered primary campaign files, inspectable artefacts and the remaining limits on underlying payload verification. Incomplete, blocked and negative results are reported rather than omitted. The boundary between inherited and individual work is stated precisely in `platform_hybrid/sem 4 work/PROVENANCE.md`.

.....

Arvind C R

Declaration on the Use of AI Tools

The following AI tools were used in this work, as recorded in the project repository.

- **Coding and writing assistants.** Anthropic Claude models and OpenAI Codex were used to write and revise code, analysis scripts and documents, including drafts of this report. Commits they contributed carry a `Co-Authored-By` trailer in the git history.
- **Frontier-model synthesis.** ChatGPT Pro Extended and Gemini Deep Think produced proposed derivations and reasoning recorded in `platform_hybrid/paper/sections/frontier_synthesis_*.tex`, which those documents mark as not being experiments. Where this report uses such a result, it states its own derivation (Chapter 6 §6.3.3).
- **Independent verification.** An LLM verification pass (Kimi, 6 July 2026) reviewed two single-seed results and flagged both as SUSPECT; both were then retested and reported as nulls (Chapter 6 §6.4.3).
- **Evaluation triage.** The Jev (TypeSafe) judgment harness was used in the E1–E14 ledger only for classification, faithfulness and value ordering, never for arithmetic (Chapter 4 §4.5).
- **Review.** The pre-defence self-review of 27 September 2026 and the revision of this report that followed it were AI-assisted.
- **Submission preparation.** An AI coding assistant helped revise reporting language, harden build and test scripts, check stored arithmetic, and inspect the final PDF. Gemini 3.1 Pro reviewed the build and verification code through the `agy` command-line tool. This preparation ran no new training or benchmark evaluations and changed no stored experimental results.

No AI assistant generated experimental data: every reported measurement comes from an executed run or evaluation recorded in the repository, and simulated values are labelled as simulations. The research direction, the experimental design, the choice of claims and their final wording are the author's responsibility.

AUTHOR_TODO (not confirmed). This declaration list still requires the author's confirmation that it is complete and matches PES policy wording before any institutional submission. It is not confirmed in this copy.

Acknowledgement

I thank my project guide, **Ramesh Prakash Guledgudd**, for direction and sustained feedback throughout this work, and for the freedom to pursue the conservative and negative results that form a significant part of it.

I thank the Semester-3 project group for the shared multi-framework benchmark and the baseline integrations on which the Semester-4 studies build. I thank the maintainers of the benchmark suites used in the E1–E14 campaign, whose native evaluators made an independently checkable evaluation possible, and the platforms — Tinker, Modal, and Google Cloud — on which the experiments ran.

Finally, I thank the reviewers whose questions at earlier reviews shaped the reporting discipline this report depends on: the insistence on stating what a number does *not* establish has improved the work materially.

Arvind C R

Abstract

This report studies group-relative reinforcement-learning post-training of large language models through an explicit record of the training and evaluation stack, at short horizons (30–50 steps), with verifiable rewards, on small and mid-scale models plus managed-API anchors. Controlled comparisons seek to isolate the factor under test; remaining differences and missing evidence limit attribution. It makes four contributions. Terminology used in every headline: a study is labelled *clipped-GRPO* only where a clipped ratio surrogate is verified in the runner, *REINFORCE group-mean* where the inspected loop centres rewards within the group with no clipping (with or without an unclipped importance ratio), and *unknown (managed or unrecovered)* where the executed loss cannot be inspected (Chapter 1 terminology box; Table 4.2). Several best-audited stacks below (the group-size sweep, the four-method controller trace and the custom Tinker loops) are therefore REINFORCE group-mean, not GRPO as published.

(1) ZVF instrumentation and a loss-form audit (P2 demoted to instrumentation). The Zero-Variance Fraction (ZVF) is logged per step and recomputed from stored reward tensors, with a closed-form Bernoulli null. That recomputation is an independent check on stored tensors; it is not prognostic validation. ZVF's predictive validity is unestablished: the historical pooled correlations are quarantined as withdrawn mixed-pool analyses (17 finite cells, 9 synthetic, with mixed outcomes including training reward; the 52-row AUROC panel's 41 safe rows are synthetic, with 7 imputed collapse anchors). Reading the runners' code distinguishes custom REINFORCE group-mean loops from clipped surrogates, nonzero-KL configuration records and unknown managed settings.

(2) Stack-conditioned reporting (schema proposal). A minimum reporting standard and a machine-readable stack registry with a `stackdiff` tool that compares declared fields and reports *declared-difference codes* (R0–R5), not a calibrated probability of a label flip and not an externally validated badge. Consistency of the registry on its own seed entries is a closed-system check, not external validation.

(3) Calibrated negative results. No reliable scaling law is recovered from reward curves across twelve fitted anchors (loss form unknown). The saturated same-stack clipped-GRPO versus PPO contrast (0.992 against 0.990; exact sign-flip $p = 0.625$,

paired-t $p = 0.374$, five seeds, paired by seed not by item, with asymmetric train–evaluation overlap) and the saturated REINFORCE group-mean group-size sweep are *pilot/feasibility evidence only*: at ceiling they cannot separate no effect from no headroom, and neither establishes equivalence or an optimum. The unsaturated PPO contrast (clipped-GRPO) is demoted accordingly: the minimal untuned-critic PPO arm (linear value head from zero, no warm-up, no GAE, no tuning, seeing 8× as many distinct prompts per step as GRPO $G = 8$, completions 190–196 tokens under a 200 cap) shows no detectable held-out gain, while the GRPO arms gained; the post-training gap is +0.050 (paired-t 95% CI $[0.015, 0.085]$) with exact sign-flip $p = 0.0625$ first (the $n = 5$ floor, not below 0.05) and paired-t $p = 0.016$ second. This is not evidence about PPO versus GRPO as algorithms. $G = 2$ and $G = 8$ show no detectable difference, without establishing equivalence. An adaptive group-size controller derived from ZVF is *unevaluated as a training policy*: its plug-in "zero rescue" is imposed by the estimator ($\hat{p} \in \{0, 1\}$ forces $h_G = 1$), and 92% of its escalations target observed all-correct groups, without proving latent certainty or impossibility of recovery with fresh rollouts. No matched-budget prospective bakeoff was run.

(4) An evaluation-governance protocol (stored-evidence, not replayed; actor loss unknown). One lightly trained actor (Qwen3.6-35B-A3B with a LoRA adapter, 40 training steps; executed loss unknown (unrecovered dirty source), adapter revision withheld, exact consumed training rows unavailable) is evaluated on the E1–E14 campaign, with completed, partial and blocked scopes kept separate. All actor-dependent campaign figures are *stored-evidence results, not replayed*, and are end-to-end *harness scores*, not capability measures: for example 593/713 E1 patches were corrupt for `git apply`, E11 has 150 extraction failures under a 1,024-token thinking-on cap, and E8 has 1,259/1,967 unparsed responses. Evaluated scopes use named native graders with the available version or revision records. A bounded 8-gram source-envelope check over 3 of 14 suites does not establish global or semantic decontamination. Receipts establish file consistency, not that the described training produced the evaluated weights. The public-checkout number audit is INCOMPLETE: of 970 registered occurrences, 828 PASS, 22 are CONTEXT-only, and 120 are ARTIFACT_MISSING (33 of the 828 are arithmetic from printed counts and 501 are token-presence checks against the project's own source files, i.e. closed-system consistency rather than independent recomputation); affected figures are therefore reported, not publicly verifiable from this package alone. Receipts, a no-pooling rule and a per-lane serving audit expose a serving defect in a zero-scoring run; the defect's contribution to that score is unquantified. Complete scopes include VerilogEval harness score ($129/312 = 41.35\%$), LAB-Bench harness score ($450/1967 = 0.2288$) and AgentDojo benign-utility harness score ($88/97$); six replacement scopes completed on 27 September 2026 (Chapter 8, Table 8.C); seven

original contracts remain externally blocked. A paired trained-versus-base rerun on 5–151 identical items per lane finds no significant difference in any lane (inconclusive at those sizes). No claim of campaign-level improvement over the base model is made.

C1 diagnostic extension (parser/reference audit case study, not a recovery-rate estimate; assistant-assisted, without independent human validation). Benchmark reference errors, ambiguous wording and equivalent units limit the interpretation of a new frozen-policy study on public GSM8K train. The first 64 of 87 eligible questions from 4,096 screened questions received 24 fresh responses after eight valid, uncapped parser-zero responses. The frozen endpoint is 11/64 (17.19%; Wilson 95% interval 9.88–28.21%). Assistant-assisted reconciliation corroborates three numerical witnesses on the same denominator, while preserving convention-dependent and ambiguous cases and one wrong-reference match. This is conditional diagnostic evidence, not a population estimate, reasoning validation or training gain. A separate, undeployed parser candidate preserves 2,025 previously valid parse objects and admits four unambiguous extractions in a predefined future subset of 2,048 outputs. It does not alter C1's frozen parser-v2 score.

Claim map (19 October 2026). Examinable contribution: ZVF as recomputable *instrumentation* (Ch. 6 §6.3.1–6.3.3); the loss-form audit and terminology box (Ch. 1, Table 4.2); stack-conditioned reporting as a *schema proposal* with declared-difference codes (Ch. 7 §§7.1–7.2); calibrated pilot/null contrasts (Ch. 6); and the evaluation-governance protocol over stored-evidence harness scores (Ch. 8). Archival/withdrawn, not examinable as positive findings: mixed-pool ZVF prognostic correlations and AUROCs (§6.3.4, quarantined), the adaptive-G controller as a training policy (§7.3, unevaluated), saturated contrasts beyond pilot status, and Appendix F's off-thesis fraud side-study.

Keywords: GRPO, RLVR, zero-variance fraction, signal starvation, stack-conditioned results, benchmark evaluation, reproducibility, evaluation governance, attribution.

Contents

Evaluation Review Revision Record i

Declaration iii

Declaration on the Use of AI Tools iv

Acknowledgement vi

Abstract vii

I Foundations 1

1 Introduction 2

1.1 Background: critic-free RL post-training and the group-relative estimator 2

1.2 A Motivating Example 6

1.3 Problem Statement 9

1.4 Objectives 10

1.5 Scope and Non-Goals 15

1.6 Contribution of the Candidate 16

1.7 Organisation of the Report 18

1.8 Canonical Numbers 19

2 Literature Survey 23

2.1 From RLHF and PPO to Group-Relative Methods 23

2.2 Direct Preference Optimisation as a Contrast 27

2.3 Fixing GRPO's Biases and Collapse 28

2.4 Verifiable Rewards, Frameworks and Reporting Practice 30
2.5 Scaling and Layer-Adaptation Context 33
2.6 Process-, Tree- and Stability-Aware Variants 34
2.7 Positioning the Portfolio 35

3 System Requirements Specification 40
3.1 Overview and Actors 40
3.2 Functional Requirements 41
3.3 Non-Functional Requirements 47
3.4 Test-Case Specification 49
3.5 Requirements Traceability Matrix 50
3.6 Hardware Requirements 53
3.7 Software Requirements 54
3.8 Constraints and Assumptions 55

II Design and Implementation 57

4 Proposed Methodology 58
4.1 The Design Commitment to Attribution 58
4.2 Per-Step Telemetry 62
4.3 Formalising the Zero-Variance Fraction 65
4.4 The Eight-Study Portfolio 72
4.5 The Design of the E1–E14 Evaluation Campaign 75
4.6 C1 Frozen Policy Diagnostic and Reference Review 80

5 Implementation Details 82
5.1 Two Rosters, One Dispatch Surface 82
5.2 The Adapter Architecture: What versus Where 84
5.3 The Tinker GRPO Loop 87
5.4 The Parallel Runner and a Real Logging Defect 88
5.5 The Colab White-Box Path (Per-Layer Gradient Profile) 89
5.6 Software Modules 91

5.7 The E1–E14 Evaluation Harness 91
5.8 The Bridge and Sampler Path 92
5.9 Recovery Re-implementations under `zvf-program/` 94

III Results **97**

6 Results I: Core GRPO Studies (P1–P4) **98**
6.1 Scope, Sources and Evidence Boundary 98
6.2 P1 — Cross-Library and Cross-Scale GRPO Behaviour 100
6.2.1 The anchor pool and the fitted saturation forms 101
6.2.2 The cross-scale test and its nulls 102
6.2.3 Where the geometric template fails 103
6.2.4 A withdrawn architectural contrast 104
6.3 P2 — The Zero-Variance Fraction (instrumentation, not a validated prognostic diagnostic) 105
6.3.1 Definition and measurement 105
6.3.2 Source-reported magnitudes across libraries 106
6.3.3 The all-correct wall and the mastery–incapacity aliasing 107
6.3.4 Prognostic value — withdrawn mixed-pool analyses (quarantined; do not cite as predictive evidence) 109
6.4 P3 — Group Size and Contrast Density 111
6.4.1 The measured sweep 111
6.4.2 The same-stack four-axis audit and the reconstructed budgets . . 114
6.4.3 The curriculum and matched-token null results 115
6.5 P4 — Length Bias and Held-Out Generalisation 116
6.5.1 The controlled null 116
6.5.2 The roster-level verbosity-trap audit 118
6.5.3 Elevated analyses 120
6.5.4 Held-out generalisation and the scale extension 122
6.5.5 Same-stack rerun on the unsaturated configuration 124
6.6 Cross-Pillar Observations and Limitations 126

7 Results II: Reporting, Registry and Controller (P5–P7) 128

7.1 A Minimum Reporting Standard for Stack-Conditioned Results (P5) . . 128

7.2 The GRPO-Registry (P6) — a schema proposal 132

7.3 From Diagnostic to Controller (P7) — controller unevaluated as a training policy 136

7.3.1 Archival detail: model-based refinements of the plug-in controller (not controller evidence) 138

7.3.2 Replication, design rules and status 140

7.4 Historical V2 Frozen-Policy Fresh-Rollout Diagnostic 141

7.5 C1 Results with Reference and Unit Boundaries 143

7.5.1 Separate Prospective Parser Validation 146

8 The E1–E14 Evaluation Campaign 147

8.1 The evaluated actor and the one-actor design 149

8.1.1 How the actor was trained 150

8.1.2 Serving conditions per lane 153

8.2 Suites with strictly complete scopes 156

8.3 Original-contract results 160

8.4 Replacement-scope lanes completed on 27 September 2026 161

8.5 The E4 rerun as a diagnostic 164

8.6 Externally blocked lanes and terminal states 165

8.7 Small-scale reruns of all fourteen lanes 165

8.8 Summary of the campaign at the point of writing 170

IV Synthesis 172

9 Cross-Study Synthesis, Threats to Validity, Conclusions and Future Work 173

9.1 Cross-Study Synthesis 173

9.2 Rigour and Threats to Validity 178

9.3 Conclusions 184

9.3.1 C1 adds numerical witnesses and exposes reference limits (parser/reference audit case study, not a recovery-rate estimate) . 186

9.4 Future Work 187

References **190**

V Appendices 199

A Historical Run Registry and Coverage Reconciliation **200**

A.1 Historical boundary and source scope 200

A.2 Semester-3 shared benchmark runs 201

A.3 Semester-4 P1–P8 study runs 204

A.3.1 Opening and null-result runs 208

A.3.2 Same-stack rerun on the unsaturated configuration 210

A.4 E1–E14 evaluation campaign lanes 211

A.5 Completeness limitations 213

B Reproducibility and Provenance **216**

B.1 What this appendix establishes 216

B.2 The declared historical research runtime 216

B.3 The reviewer's entry point 217

B.4 Where the documentation has drifted from the code 218

B.5 The audit apparatus 219

B.6 The deterministic ledger check 220

B.7 The receipt model 222

B.8 Evidence loss in the finish era 223

B.9 The Semester 3 and Semester 4 provenance boundary 224

B.10 Residual non-determinism and the limits of reproduction 225

B.11 Primary-artefact recovery and availability 225

B.12 Fresh-Sampling Diagnostic: Frozen Contract and Audit 228

B.13 C1 scientific source availability 229

C Notation, Symbols and Abbreviations **230**

C.1 Scope and convention 230

C.2 Symbols . . . 230
C.3 Notation collisions and conventions . . . 233
C.4 Abbreviations . . . 233
C.5 The E1–E14 lane identifiers, scopes and statuses . . . 236

D Campaign Lane Detail **239**

D.1 Actor identity, inference conditions and scoping notes . . . 239
D.2 Training-run provenance . . . 240
D.3 Serving conditions: format limits and the scope of the stop-sequence mechanism . . . 241
D.4 Strictly complete scopes: lane detail . . . 242
D.5 Original-contract results: lane detail . . . 247
D.6 Replacement-scope lane narratives, 27 September 2026 . . . 248
D.7 E4 rerun: reported audit and causal limits . . . 251
D.8 Externally blocked lanes and verification limits . . . 252
D.9 Small-scale reruns: detail and per-lane caveats . . . 252

E Corrections to Internal Source Documents **255**

E.1 Evidence-scope repairs after the 2 October review . . . 260
E.2 ESA Registry Description Corrections . . . 261
E.3 Adversarial ESA Documentation Review . . . 262
E.4 ARS Panel Corrections, 19 October 2026 (claim-tier only; no new results) 263

F Applied Side Study: Credit-Card Fraud Detection (P8) **265**

F.1 Dataset, splits, and the two arms . . . 265
F.2 The head-to-head result . . . 266
F.3 Why the scoring seat stays with the tree . . . 267
F.4 Supporting measurements . . . 268
F.5 Proposed roles for the language model . . . 268
F.6 Limitations . . . 269

G C1 Evidence and Case Ledger **270**

G.1 Event ledger . . . 270

G.2 Complete reference classification index 272
G.3 Public evidence availability 273

H Source Reference Map **276**

H.1 Chapter 1: Introduction 276
H.2 Chapter 2: Literature Survey 277
H.3 Chapter 3: System Requirements Specification 279
H.4 Chapter 4: Proposed Methodology 280
H.5 Chapter 5: Implementation Details 282
H.6 Chapter 6: Results I: Core GRPO Studies (P1–P4) 284
H.7 Chapter 7: Results II: Reporting, Registry and Controller (P5–P7) . . . 288
H.8 Chapter 8: The E1–E14 Evaluation Campaign 290
H.9 Chapter 9: Cross-Study Synthesis, Threats to Validity, Conclusions and Future Work 291
H.10 Appendix B: Reproducibility and Provenance 293
H.11 Appendix D: Campaign Lane Detail 293
H.12 Appendix F: Applied Side Study: Credit-Card Fraud Detection (P8) . . 295

I Public Coverage and Source Availability **297**

I.1 Counting units and publication boundary 297
I.2 Bounded checkpoint and provider evidence 298
I.3 Public P11 confirmatory bindings 298
I.4 Recovered campaign evidence 300
I.5 Preserved C1 result and residual limits 301

J Number-to-Artifact Provenance **302**

List of Figures

1.1 The GRPO training loop 3

1.2 The confounding problem this work addresses 7

1.3 Boundary between the inherited Semester-3 group infrastructure and the individual Semester-4 contribution reported in this document 17

2.1 Algorithmic lineage from RLHF through PPO to GRPO, with DPO as an orthogonal branch 25

2.2 The eight studies P1–P8 grouped by theme, with the question each one addresses and the state of its evidence 36

4.1 The four planned comparison pillars 59

4.2 The target attribution design: vary one factor while holding the remaining stack fixed 59

4.3 The intended per-step telemetry contract and the destinations each record flows to 63

4.4 Definition of the Zero-Variance Fraction 66

4.5 Gradient utilisation, $1 - \mathrm{ZVF}$, as a function of group size G 67

4.6 Design of the E1–E14 native-benchmark evaluation campaign 76

5.1 The evidence chain from sealed request through execution and native grading to a deterministic ledger check 83

5.2 Six RL frameworks behind one Tinker-style API 85

5.3 Evaluation harness design 93

6.1 Cross-scale behaviour of reward across the studied model range: no reliable monotone scaling trend is recovered 99

6.2 Mean Zero-Variance Fraction by method in a simulation projection (a) and by measured experiment family (b); neither panel compares backend libraries . . . 105

6.3 Group size G: one single-seed sweep, one three-seed sweep and one reconstruction . . . 112

6.4 The post-hoc peak-then-decay rule (peak before 65% of logged steps and terminal reward below 0.90× peak) on the roster and on the controlled comparison . . . 117

8.1 Terminal status of all fourteen E1–E14 lanes: the 2026-09-19 ledger of record, updated with the six replacement scopes scored on 2026-09-27 (double border, ⋆) . . . 148

8.2 LAB-Bench public split, per-category accuracy, all 1,967 questions graded across eight categories . . . 157

8.3 VerilogEval decomposition: two native framings of 156 tasks, 67/156 code-completion and 62/156 spec-to-RTL, summing to $129/312 = 41.35\%$ pass@1 . . . 157

8.4 The six replacement-scope results scored on 2026-09-27, each with its 95% confidence interval . . . 162

8.5 The E4 rerun diagnostic . . . 166

8.6 Terminal-state taxonomy used to close every lane . . . 167

List of Tables

1.1 Canonical numbers. "results/" is `platform_hybrid/experiments/results/`; "sections/", "archive/" and "neurips_2026_variants/" are under `platform_hybrid/paper/`. The Qwen3-8B GSM8K GRPO training-reward rows use different summaries (last-10 mean, trace mean, pooled) and the sources do not establish that they come from the same run, so they are not interchangeable. 20

2.1 Positioning of the eight portfolio studies (P1–P8) against closest prior art and the narrowed axis each claims. 37

3.1 Functional requirements. Sources: the Phase-1 report is `platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex`; other files are under `platform_hybrid/`, `platform_local/` or `zvf-program/flagship/`. 42

3.2 Non-functional requirements. 47

3.3 Requirements traceability matrix: each functional requirement mapped to the artefacts that implement it and the audit check that verifies it. . . . 51

3.4 Hardware requirements and their status. 53

4.1 The four intended comparison pillars. The text and design column disclose coupled changes and limits; the table does not certify that every other factor was fixed. 60

4.2 Loss forms from inspected current or candidate runners. The current reference loop passes response lengths to its custom closure and can enable auxiliary NLL; the historical actor execution source is unrecoverable, so its preset is not proof of its executed loss or mask. M = `platform_hybrid/experiments/modal/`, T = `platform_hybrid/experiments/tinker-runs/`, C = `zvf-program/colab-experiments/`. "n/a" means the study does no training; "not recoverable" means the repository does not hold the code or configuration that ran. 67

5.1 The four recovery re-implementations. Schedule offsets, hashes, reservation identifiers and HMAC domain strings are recorded in the cited source files rather than repeated here. 95

6.1 Same-stack rerun on Qwen2.5-1.5B-Instruct GSM8K-CoT; paired-*t* intervals over five seeds. The PPO arm is a minimal untuned critic (no warm-up/GAE/tuning) seeing 8× as many distinct prompts per step as GRPO G = 8, under a near-binding 200-token cap; the contrast is not a verdict on PPO versus GRPO as algorithms. Exact sign-flip p = 0.0625 (n = 5 floor) precedes paired-t p = 0.016 wherever this gap is quoted. Stored pre-training accuracy is identical across these seeds under greedy evaluation on a fixed item set; greedy decoding alone does not guarantee implementation-level determinism. 125

7.1 Fresh reward mixedness under the frozen diagnostic contract. The all-correct numerator includes all 20 format-induced first changes; its other 11 cases are numeric failures. Intervals use prompts as the unit and a binomial working model, not a guarantee of population coverage under arbitrary dependence. 142

7.2 C1 results and interpretation. The final three rows partition the eight events outside the conservative witness count. [S1-S4] 143

7.3 Refined labels preserve the original classifications and distinguish final-value errors from explanation defects. They are second-review judgments, not a consensus benchmark error count. 145

8.1 Reported training record of the E1–E14 actor, with the source-availability limitations above. 151

8.2 Serving conditions of the original campaign runs, by lane. 154

8.C Replacement-scope results, 27 September 2026 163

8.D Deviations from the fail-closed protocol, 27 September 2026 163

8.A Base model on Tinker, small-scale subsets 168

8.B Trained actor versus base model on the same vLLM engine, identical items 169

9.1 Threats to validity and the mitigation applied to each. † marks figures drawn from Tinker data only; replicating them requires Tinker API access (`LIMITATIONS_AND_IMPACT.md` §6.3). 179

A.1 Historical source scope; no account-level project census is included. . . 201

A.2 Semester-3 cross-framework shared benchmark runs. 201

A.3 Semester-3 Modal campaign runs. 202

A.4 Semester-3 group-size sweep runs. 203

A.5 Semester-4 P1-P8 study runs: each claim mapped to its linked runs, stack, model and algorithm. 204

A.6 Semester-4 opening and null-result runs: the curriculum, token-budget, hard-prompt, loss-formulation and layer-freeze blocks. 208

A.7 Same-stack rerun on the unsaturated configuration (§6.5.5). 211

A.8 E1-E14 evaluation campaign lanes with their run identifiers, stacks and platforms, models, suites and outcomes. Outcomes are stored-evidence end-to-end harness scores, not replayed; their source artefacts are among those missing from the public checkout, so they are reported, not publicly verifiable from this package (§1.8). 212

A.9 Metadata limitations in the historical retained registry; private account-level field counts are omitted. 214

A.10 Run totals quoted in this report and the corpus each one counts. 215

B.1 The deterministic ledger check by class, listing each specific check and what it establishes. 221

B.2 Recovered primary campaign files. Original-source preservation metadata is retained privately; the public package does not include the recovery export or raw operational chronology. 226

C.1 Notation: symbols used in this report, their meaning, and any divergence in how the underlying sources use them. GU is a reward-contrast availability proxy, not a measured gradient norm or a guarantee of a nonzero total update. 230

C.2 Abbreviations and their expansions, with names that no source expands recorded as identities rather than glossed. 233

C.3 The E1–E14 lanes: original contract, replacement scope, headline figure, terminal state and receipt. Every actor-dependent figure is a stored-evidence end-to-end harness score, not replayed and not a capability measure; several are reported, not publicly verifiable from this package (§1.8). E14 retains native accepted-set accuracy 51.31% over 4,426 judged rows and the separate all-disposition diagnostic 51.29% over 4,428 dispositions; the recovered terminal note's mixed denominator label is corrected in Table E.1. The recovered E4 pending-state ledger predates its later reported 100-trial rerun (§8.5). 236

E.1 Corrections applied to internal source documents. Each row's corrected value is the one used in the chapter named in the first column. 255

F.1 The two arms of P8. 266

F.2 Head-to-head result on the synthetic card-fraud set, by arm and evaluation split. 266

F.3 Supporting P8 measurements. Bracketed ranges are paired-bootstrap 95% intervals. The first row reports sensor minus full-feature performance; the AUC and accuracy intervals are reversed and reordered from the source's full-feature-minus-sensor convention. Source files are under `platform_hybrid/experiments/results/` and `platform_hybrid/paper/archive/absorbed/P08_fraud/sections/`. 268

G.1 Complete accounting of all eleven parser-defined events. 270

G.2 Complete bounded-cohort index. The JSON and CSV ledgers retain full identifiers, both review labels and case-specific explanations. 272

G.3 C1 scientific source key. A checksum binds an identified source; it does not supply its contents or verify model execution. S10 does not contribute to the primary endpoint; S11 is not cited in this derivative. . . . 274

I.1 Public P11 manifest checks. Full immutable revisions and manifest SHA-256 values are in public_p11_manifest_bindings.json. 299

J.1 Selected numerical token occurrences and their recorded checks. 303

Part I

Foundations

Chapter 1

Introduction

1.1 Background: critic-free RL post-training and the group-relative estimator

Post-training is now the stage at which a base language model is turned into something that reliably follows instructions and solves problems. For several years the dominant recipe was reinforcement learning from human feedback (RLHF), in which a learned reward model is trained on human preference comparisons and then used as the reward signal for a policy-optimisation loop. RLHF works, but it introduces a second learned model whose errors the policy can exploit, and it makes reward construction expensive and hard to audit. The alternative that has taken hold more recently is reinforcement learning with verifiable rewards (RLVR): instead of a learned reward model, the reward comes from a programmatic checker — exact-match against a reference answer for grade-school mathematics, unit tests for code, a formal or semi-formal validator for structured output. A programmatic checker makes the scoring procedure explicit, but its runtime cost, determinism and semantic fidelity depend on the task and implementation. Its output records the result of that procedure, not necessarily the truth of the answer: parsers, reference keys, tests and model-based judges can all introduce error (Figure 1.1).

The workhorse optimiser for both settings has been proximal policy optimisation (PPO), which optimises a clipped surrogate objective against a value function critic. The critic is a second network, usually of comparable size to the policy, trained to predict the expected return of the current state; its predictions supply the baseline that the advantage estimator subtracts. This works, but it is expensive and fragile. The critic consumes memory and has its own learning rate and failure modes. Approximation errors can introduce bias through bootstrapped advantage estimators such as GAE with $\lambda < 1$;

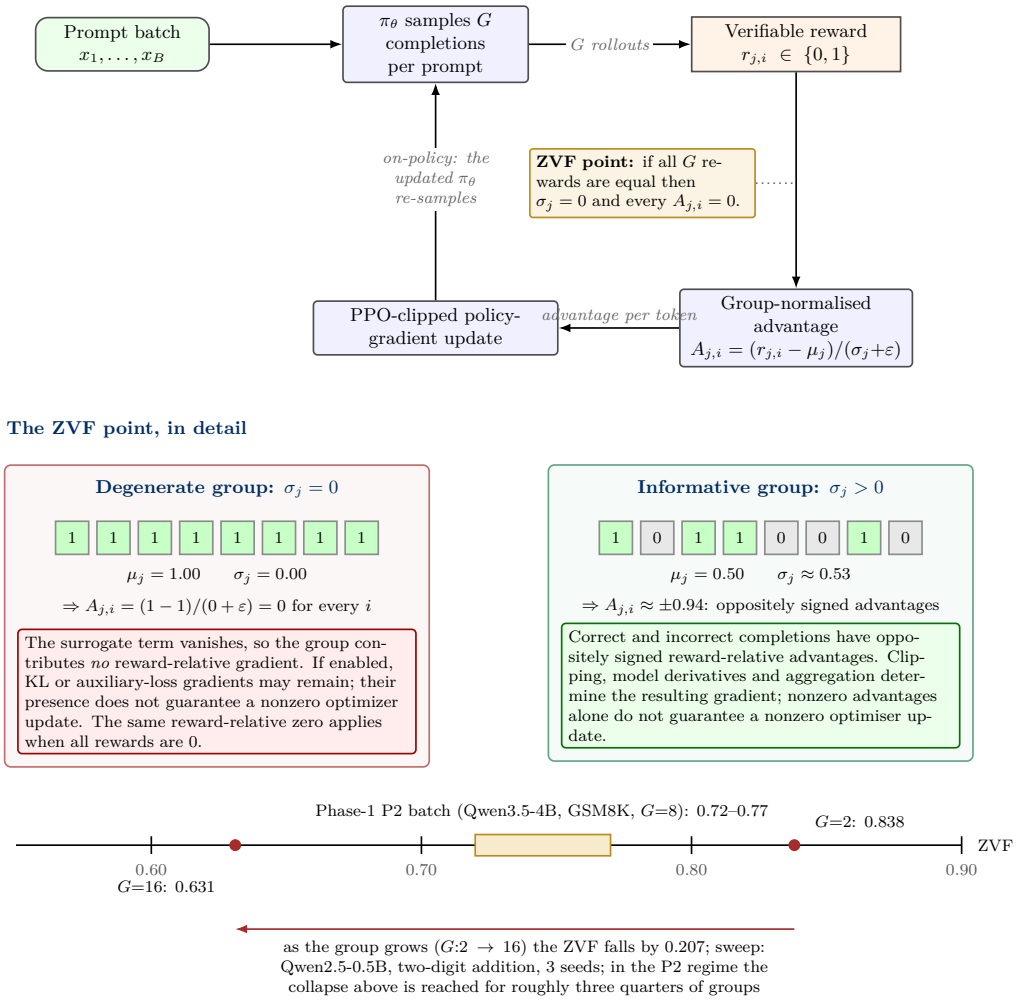


Figure 1.1: The GRPO training loop. A prompt is sampled G times, each completion is scored by a reward function, advantages are formed relative to the group, and the policy is updated. When all G rewards coincide the group-relative advantage collapses to zero and no reward-relative gradient flows, although the rollouts are still paid for. Number line: the Phase-1 P2 batch ZVF of 0.72–0.77 (four methods, 40 steps, 16 prompts × 8 samples, GSM8K, seed 0, Qwen3.5-4B) and the group-size sweep on Qwen2.5-0.5B two-digit addition over three seeds, where mean ZVF falls from 0.838 at $G = 2$ to 0.631 at $G = 16$ (a fall of 0.207).

an action-independent baseline subtracted from Monte Carlo returns does not, by itself, bias the policy gradient [1].

Group Relative Policy Optimization (GRPO) removes the critic entirely. Rather than learn a value function, GRPO samples a group of G completions for the same prompt, scores all of them with the verifier, and derives the advantage of each completion from the group's own reward statistics. Concretely, for a group with rewards $r_1, \ldots, r_G$, the advantage assigned to completion i is a within-group standardisation,

$$A_i = \frac{r_i - \mu_g}{\sigma_g + \varepsilon}, \qquad \mu_g = \frac{1}{G}\sum_j r_j, \qquad \sigma_g^2 = \frac{1}{G}\sum_j (r_j - \mu_g)^2,$$

which in the original GRPO formulation is then used in a clipped, KL-regularised policy-gradient update. Several inspected custom runners omit KL regularisation; the custom-loss Tinker reference loop is REINFORCE with a group-mean baseline and has no ratio or clipping. This does not describe every run: TRL configuration records include a reference policy and nonzero KL, while managed or unrecoverable settings remain unknown. Table 4.2 gives row-wise loss evidence; the campaign actor's original execution source is not recoverable (Appendix D). The empirical baseline is the group mean; there is no value network to train, no value loss to weight, and no critic to keep in sync with the policy. The trade changes the sampling unit: G completions share one prompt and their estimated advantages are coupled through group statistics. The effective sample size cannot be inferred from the completion count alone.

> **Terminology box (19 October 2026) — loss-form labels used in every headline.** Each label is read from the runner code in Table 4.2, not from a study's title. *Clipped-GRPO*: a clipped ratio surrogate is verified in the executed runner — the same-stack PPO/GRPO arithmetic contrast (§6.2.3), the unsaturated GSM8K-CoT rerun (§6.5.5), the P4 GRPO/Dr. GRPO comparisons on arithmetic and GSM8K-CoT, and the P7 Colab four-arm audit. *REINFORCE group-mean*: rewards are centred within the group with no clipping, with or without an unclipped importance ratio — the custom-loss Tinker reference loop, the P3 Qwen2.5-0.5B arithmetic group-size sweep, the P3 Qwen3.5-4B openings, the P4 Qwen3-8B raised-cap extension, the P2 Phase-1 four-method batch and the P7 Tinker adaptive-G run (the last two use Tinker's importance-sampling ratio without clipping). These are not GRPO (Shao et al.) proper and must not be cited as such. *Unknown (managed or unrecovered)*: the P1 cross-scale anchors, the P3 Qwen3-8B matched-budget panel (candidate source only), both sides of the Tinker/TRL pair (managed dump; TRL defaults not set in code) and the E1–E14 campaign actor, whose dirty training source is missing, so its executed

objective remains unknown. Where this box and an older headline conflict, this box governs.

That trade has a sharp consequence, and it is the observation this project is organised around. Because the advantage is a *within-group* standardisation, its numerator is a deviation from the group mean and its denominator is the group's own spread. When every completion in a group receives the same verifier outcome — all correct, or all incorrect — the group contributes nothing: $\sigma_g = 0$, every numerator is zero, and every advantage A_i is exactly zero. The group has been fully sampled and fully scored, at full token cost, and the reward-relative part of the update is identically zero. In an objective with a KL penalty, that penalty would still pull the policy toward the reference; for verified zero-KL group-relative policy surrogates there is no such contribution, although auxiliary/value losses and optimiser state can still update parameters. Exact ties imply zero reward-relative advantage; the tolerance-based diagnostic in §4.3 also counts near-ties and does not assert exactly zero gradient for them. We call the fraction of a training batch that falls into this state the **Zero-Variance Fraction (ZVF)**, and it is the single measurement that most of this report's diagnostics are built around.

ZVF is not a rare edge case, but its size depends on the regime. The Phase-1 main configuration (Qwen3.5-4B, GSM8K, 40 steps, $G = 8$) records a ZVF of approximately 0.72–0.77, meaning that roughly three quarters of that rollout batch contributes no reward-relative gradient. Selected measured cohort means span 0.16 (Qwen3-8B on held-out GSM8K at $G = 8$) to 0.84 (Qwen2.5-0.5B arithmetic at $G = 2$), so no single value is typical; the measured values are collected in the canonical-numbers table (Table 1.1). The fraction responds to the one knob that most directly controls it: on the Qwen2.5-0.5B arithmetic sweep, mean ZVF falls from 0.838 at $G = 2$ to 0.631 at $G = 16$, a decline of 0.207 across that range. Larger groups buy more contrast, with diminishing returns that saturate well before the group is small enough to be cheap.

There is a second and less comfortable observation in the background, and it is about attribution rather than mechanism. "GRPO" is not a single algorithm. It is a label that covers implementations in Tinker, TRL, SkyRL, verl, OpenRLHF and a growing number of research forks, each of which chooses its own answer parser, sampling temperature, top-p, KL coefficient, clip range, LoRA target set, precision and evaluation harness. Two runs that both say "GRPO" in their titles may differ in a dozen ways that plausibly move the outcome, and the reported headline number does not distinguish between them. The project's own stack-sensitivity probe makes this concrete: a nominally matched configuration (Qwen3-8B, seed 42, $G = 8$, learning rate 1×10^{-5}, GSM8K-500, 30 steps, visible hyperparameters held equal, although the managed Tinker run used the Qwen3-8B-Base checkpoint and TRL the instruction-tuned Qwen3-8B) was run across four framework paths, two of which completed and two of which are dry-

run placeholders, with results recorded in `experiments/results/framework_comparison.json`. Four separate marginal one-way ANOVAs over 42 experiments give $\eta^2 = 0.546$ for library or framework, $\eta^2 = 0.558$ for training algorithm, $\eta^2 = 0.471$ for model family and $\eta^2 = 0.322$ for model scale — with the important caveat, stated by the source itself, that these factors are confounded with one another and with backend, reward implementation, hardware and task. Because each value is a marginal per-factor η^2 on a collinear corpus, the four sum to 1.897 and are not a variance decomposition; none estimates a factor's independent contribution (Chapter 6 §6.1; source: platform_hybrid/paper/sections/_shared_methods.tex). The framework factor is nonetheless not a nuisance parameter to be wished away: marginally, outcomes vary with it about as strongly as with the algorithm label.

1.2 A Motivating Example

Consider a single training step with a group size of $G = 8$ on an easy GSM8K prompt that the current policy already solves. All eight sampled completions produce the correct final answer, so each receives reward $r_i = 1$. The group mean is $\mu_g = 1$ and the group standard deviation is $\sigma_g = 0$, so every advantage $A_i = 0$. The compute spent on that group is real — eight full forward-decode passes at whatever temperature the sampler is configured with — and the group supplies no task-learning signal. It contributes zero reward-relative surrogate gradient in a verified group-centred implementation; KL and auxiliary losses, and optimiser state, remain separate. Now imagine a batch of 16 such prompts in which 12 are already solved and 4 are not: $12/16 = 0.75$ of the batch is "dark" compute. What the Semester 4 work adds to this picture is that 0.75 is not a worst case: it is close to the 0.72–0.77 measured on the Phase-1 main configuration. It is not a universal value either, since selected measured cohort means range from 0.16 to 0.84 depending on model, task and G (Table 1.1), so any claim that GRPO is learning efficiently has to be read against the ZVF of its own regime (Figure 1.2).

Now suppose, having noticed this, that one wants to answer the obvious follow-up question: is the group-relative estimator actually a better choice than a learned critic? The natural experiment is a matched comparison — same model, same training prompts, same verifier, same step budget, same evaluation, with PPO and GRPO as the only difference. The project's first attempt at that contrast is recorded in a historical internal report under the label "Qwen3-8B", with a Welch t-test of $p = 0.7605$ computed over the final ten steps of a single run per arm. Those ten steps are autocorrelated observations of one run, not ten independent runs, and the project's later methods note re-examined the row and marks it "provenance conflict; not estimable". No effect size, confidence interval or power figure is therefore quoted for it here, and the Welch value is carried

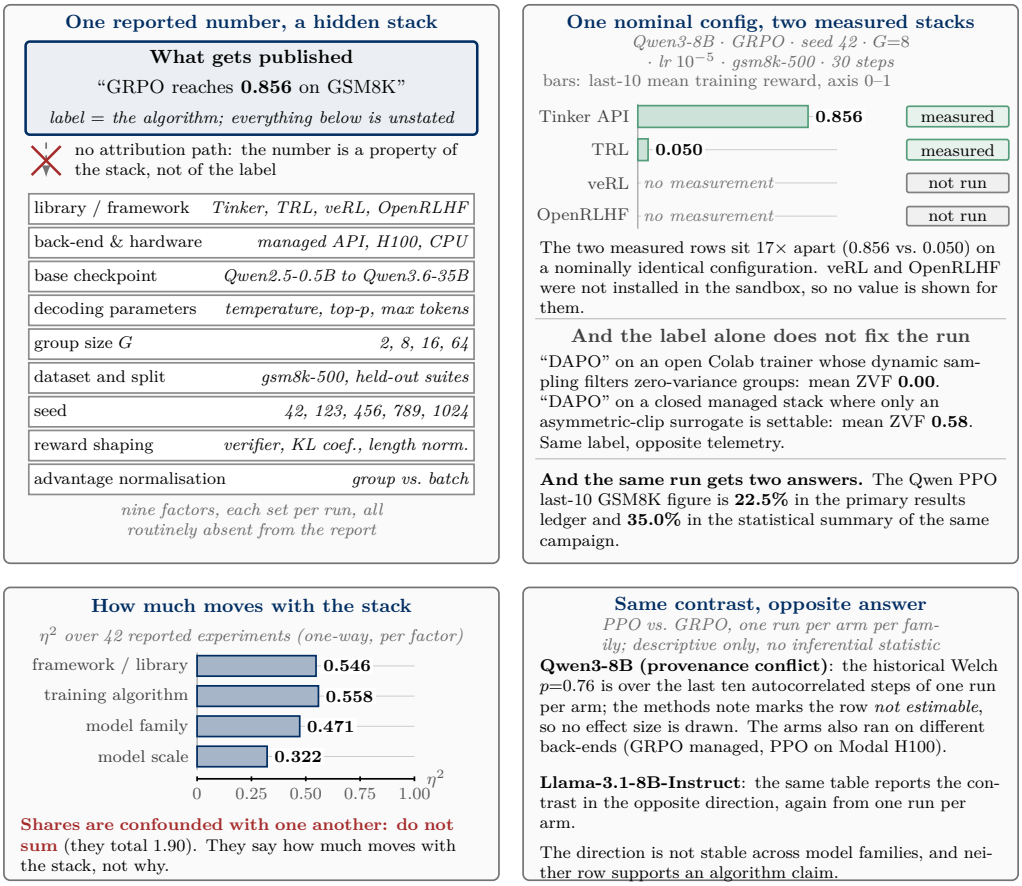


Figure 1.2: The confounding problem this work addresses. A single reported reward figure sits on top of an unstated stack; without fixing and reporting that stack the number is not attributable to the method under test. Top right: of the four frameworks in the nominal configuration only Tinker and TRL were run; veRL and OpenRLHF were not installed in the sandbox and have no measurement. The 17× gap between the two measured stacks is an under-specification exhibit, not a clean back-end-only effect, because the managed stack also pinned a different base checkpoint (Qwen3-8B-Base vs. Qwen3-8B). Bottom left: one-way η^2 shares over 42 reported experiments; they are confounded with one another and with back-end, reward implementation, hardware and task, so they do not sum to one. Bottom right: the PPO-versus-GRPO rows of the Phase-1 table, one run per arm, shown without inferential statistics; the Qwen arms did not share a back-end (GRPO on the managed API, PPO on a Modal H100 cluster), so no directional Qwen algorithm claim is made.

only as a provenance record (Chapter 6 §6.2.3). The project's own rule is that single-seed Tinker experiments have "zero statistical power" and are "treated as descriptive only and are not subject to significance testing".

Two further observations from the same historical source make the example sharper rather than cleaner. First, the same table reports the PPO-versus-GRPO contrast on Llama-3.1-8B-Instruct in the opposite direction; it is also one run per arm, so again no inferential statistic is quoted, but the direction alone shows that the apparent answer is not stable across model families. Second, the Qwen arms were not executed on a common back-end — the GRPO arm ran through Tinker-managed infrastructure and the PPO arm on a Modal H100 cluster — and the source states this explicitly and declines to draw the algorithmic conclusion it invites: "We therefore treat the PPO/GRPO rows as stack-conditioned evidence, not as an algorithm diagnostic baseline", and "We therefore withhold a directional Qwen algorithm claim". The same section records an aggregation gap that illustrates why such care is warranted: the Qwen PPO last-10 GSM8K figure is 22.5% in the primary results ledger but 35.0% in the statistical summary, and the source names the ledger value as primary and treats the summary value as evidence of an aggregation defect rather than as a second measurement.

The genuinely same-stack evidence in the repository is also a null, and its scope has to be stated with it. **Pilot/feasibility only (19 October 2026):** the saturated contrasts in this paragraph do not answer RQ2. The same-stack PPO/GRPO run (Qwen2.5-0.5B, 40 steps, five seeds, paired by seed but not by evaluation item) is a two-digit addition task on which both arms are at ceiling: evaluation accuracy is 0.990 for GRPO and 0.992 for PPO, the paired difference is −0.002 (exact sign-flip p = 0.625; paired-t p = 0.374), and the 200 evaluation prompts are fresh random draws from the same generator used in training rather than a disjoint split; the two arms of a seed share only 3–7 of their 200 evaluation items, and PPO had drawn about 40% of its evaluation items during training against about 7% for GRPO (§6.2.3; sources: platform_hybrid/experiments/results/samestack_ppo_grpo.json; platform_hybrid/experiments/modal/modal_samestack_ppo_grpo.py). At that ceiling a null cannot separate "no effect" from "no headroom", so the result is that no difference was detectable on a saturated task, not that the estimators are equivalent; a paired TOST at a ±0.005 margin gives p = 0.10 (Table 4.2 gives the exact loss form of both arms). Rerun on the unsaturated Qwen2.5-1.5B GSM8K-CoT configuration with a disjoint test split, the unsaturated comparisons carry the RQ2 evidence, and this contrast remains baseline-specific and demoted: the minimal untuned-critic PPO arm (no warm-up, no GAE, no tuning; 8× the distinct-prompt exposure of GRPO G = 8; completions near the 200-token cap) shows no detectable gain while the GRPO arms gained, a post-training gap of +0.050 [+0.015, +0.085] over five paired seeds (exact sign-flip p = 0.0625 first — the

n = 5 floor, not below 0.05; paired-t p = 0.016 second) (§6.5.5). That gap is not evidence about PPO versus GRPO as algorithms, and a powered, item-paired, disjoint-item design remains required future work. The variant audit (not to be confused with campaign lane E1) takes four GRPO-family variants (DAPO, GSPO, Dr. GRPO, AERO) plus the GRPO reference, runs five arms across eight paired seeds for 40 units at a frozen stack fingerprint, and evaluates on 500 held-out GSM8K examples per unit. Every one of the four contrasts is inconclusive. The figures below are paired-t 95% intervals and paired-t p-values over the eight seeds, recomputed from `zvf-program/audit/results/full/*.json`: DAPO +0.00100, CI $[-0.00632, +0.00832]$, $p = 0.756$; GSPO +0.00500, CI $[-0.00357, +0.01357]$, $p = 0.210$; Dr. GRPO −0.00200, CI $[-0.01272, +0.00872]$, $p = 0.673$; AERO −0.00075, CI $[-0.01029, +0.00879]$, $p = 0.858$. These paired-t intervals replace the audit's own intervals (corrected; see Table E.1). After Benjamini–Hochberg correction every adjusted p is at least 0.84. The pre-audit aggregator's verdict that the differences "disappear" is itself declared invalid, because the locked exact non-central paired-t minimum detectable effect of 0.010115893 exceeds the 0.010 margin the study was designed around. The audit's permitted wording is deliberately narrow: across eight paired seeds no arm produced a BH-significant held-out difference from GRPO, and none met the locked exact-power equivalence rule — which is not the same as saying the methods are the same, nor that they fail to improve. That audit runs on Qwen3-8B GSM8K with 500 evaluation examples per unit (Appendix A, P11).

Taken together, these two halves of the example motivate what follows. The mechanism half shows that sampling can produce groups with no reward-relative advantage signal even while reward rises. The attribution half shows that the comparative question — is this estimator better than the alternative? — cannot be answered from the labels "GRPO" and "PPO" alone. The historical comparisons are confounded or at ceiling; the later unsaturated comparison supplies a suggestive gap against an untuned critic, with unequal prompt exposure, rather than a general ranking. These observations motivate better measurement and fuller reporting, not a claim that the GRPO estimator is defective.

1.3 Problem Statement

The project is organised around four problems, in decreasing order of how often the literature acknowledges them.

Attribution requires more than an algorithm label. RL post-training frameworks can differ in parser, sampler, KL coefficient, clip range, LoRA targets, precision and evaluator. When those components vary together, a difference between runs labelled "GRPO"

and "PPO" cannot be assigned to the estimator alone. The project's own marginal per-factor η^2 values put the framework factor at a magnitude comparable to the algorithm factor, although they are not a partition of the variance. Its same-stack comparison on saturated 0.5B addition returns a paired difference of -0.002 (exact sign-flip $p = 0.625$, paired-t $p = 0.374$; pilot/feasibility only). These local examples motivate an explicit stack record; they do not establish how often the wider literature makes invalid comparisons.

Reward alone does not expose signal starvation. Mean reward, loss, gradient norm, entropy and completion length do not directly report the fraction of groups whose relative advantage is zero. Rising reward can coexist with a high or low ZVF. The project therefore persists group rewards and reports this fraction explicitly. Prior methods already recognise and intervene on zero-variance groups, including DAPO and GRESO (§2.3); the contribution here is the recomputable measurement and its bounded interpretation, not discovery of the mechanism.

GRPO-specific provenance is incompletely specified. General reporting and reproducibility frameworks already exist (§2.4). The project's targeted literature search through July 2026 did not identify an equivalent GRPO-specific machine-readable run datasheet combining executed loss form, per-component implementation status and an explicit unauditability marker. This is a bounded search finding, not proof of absence. The practical problem addressed is how to record these distinctions consistently and validate the resulting records before using them in a comparison.

Evaluation results are rarely reported with their terminal states. Benchmark suites in the agentic and reasoning evaluation space are frequently multi-scope (a public split versus a private original contract, a benign-utility scope versus an adversarial scope), quota-limited, or gated behind private payloads. Reports tend either to omit such suites or to collapse them into a single number, which conceals how much of the suite was actually graded. The project treats this as a first-class concern rather than a presentational one: a result that is genuinely partial should be recorded as partial, with its coverage denominator and its reopen condition, and a lane that cannot be run at all should be recorded as externally blocked rather than quietly dropped.

1.4 Objectives

The project pursued eight objectives. The aims are distinguished from their current attainment in the table below.

O1 — Build a single harness that can dispatch the same experiment to multiple back-ends. Provide one control surface over Tinker, TRL, SkyRL, verl and OpenRLHF

paths so that a configuration can be held fixed while the framework varies. The harness is the deliverable; it is not a completed multi-framework benchmark. Only Tinker and TRL produced completed runs, and those two used different base checkpoints (Qwen3-8B-Base and Qwen3-8B Instruct), so no framework comparison is claimed (Chapter 5 §5.2).

O2 — Instrument the training loop so that signal starvation is directly observable. Emit per-step telemetry carrying ZVF, gradient utilisation, policy entropy, completion length and KL divergence, and persist the raw per-group reward tensors so that any derived statistic can be deterministically recomputed after the fact rather than trusted from a log line.

O3 — Measure the zero-variance regime on real reward tensors and test the levers that might move it. Characterise ZVF empirically on genuine GRPO reward tensors, and investigate re-baselining and curriculum interventions as ways of converting dark compute into contrast.

O4 — Establish and hold a scientific protocol. Multi-seed runs, matched baselines, held-out evaluation with explicit denominators, deterministic recomputation, declared (not pre-registered) effect-size and power accounting, and reporting of negatives and nulls — including the cases where the answer is that the study was underpowered to answer.

O5 — Identify a bounded contribution relative to prior work. Use a literature scan to position a GRPO-specific reporting proposal against existing documentation and reproducibility frameworks. This produced the minimum reporting standard (P5) and machine-readable stack registry (P6); the originality claim is limited to the documented search and distinctions in §2.4 and Table 2.1.

O6 — Turn the diagnostic into an intervention. Derive an adaptive group-size controller from the ZVF measurement and evaluate it as a training-time policy rather than a post-hoc observation (P7).

O7 — Build and exercise an evaluation-governance protocol on one trained actor. Evaluate a single trained checkpoint across fourteen lanes with named native or replacement scopes, source-specific evaluator revision records, receipts, budgets and explicit terminal states. The suites are absent from the actor's recorded training-suite list; content-level decontamination remains unverified, and revision bindings have the limits reported in §8.2. The contribution is the protocol and the receipt-bound record it produces. The campaign is not evidence about GRPO: the actor's training run was short (40 steps, Chapter 8 §8.1.1), and the only trained-versus-base comparison is the small-sample Table 8.B.

O8 — Report under a deliberate asymmetry. Where the evidence supports a struc-

tural or descriptive claim, state it; where it does not, withhold it. No cross-suite aggregate, no pooling of original-contract and replacement-scope numbers, and no claim of improvement over the base model in the E1–E14 campaign. Its paired trained-versus-base comparison (Chapter 8, Table 8.B) is inconclusive in every lane. The controlled studies in Chapter 6 separately report pre-to-post gains and the M1b GRPO–PPO contrast, limited to the tested stack and an untuned critic; five seeds give an exact sign-flip p-value of 0.0625 despite the paired t-test p-value of 0.016.

The status below separates delivered software and analyses from experimental aims that remain open. A working component does not by itself establish its scientific benefit.

Objective	Delivered evidence	Attainment and remaining limit
O1: common dispatch	Launch-plan matrix and framework dispatch (§5.1–§5.2)	Harness implemented; only Tinker and TRL completed the compared runs, on different checkpoints. Cross-framework attribution remains open.
O2: observable signal	Per-step instrumentation and stored-tensor recomputation (§5.3, §6.3)	Diagnostic demonstrated on retained tensors; observability and source retention differ across historical runs.
O3: measure and test levers	ZVF recomputation, group-size sweep and curriculum/length studies (Chapter 6)	Measurements completed; no reliable group-size optimum or general intervention benefit established.
O4: scientific protocol	Multi-seed controls, held-out results and evidence audits (Chapters 4 and 6)	Protocol applied with disclosed exceptions; ceiling effects, small seed counts and unequal prompt exposure limit comparisons.

Objective	Delivered evidence	Attainment and remaining limit
O5: reporting proposal	Eight-item standard, schema, registry and comparison CLI (§7.1–§7.2)	Implemented and evaluated on the recorded corpus; novelty is search-bounded, and the risk flag is illustrated by one manifest pair.
O6: adaptive intervention	Controller implementation and retrospective/model-based audit (§7.3)	Partially attained: prospective training benefit and the matched-budget bakeoff remain untested.
O7: campaign governance	Per-lane outcomes, receipts and terminal-state ledger (Chapter 8; Table C.3)	Protocol exercised; original blocked scopes, incomplete grading and provenance limits remain explicit.
O8: bounded reporting	Scoped conclusions, source corrections and evidence map (Chapter 9; Appendices E and H)	Applied in this report; arithmetic and record checks do not independently authenticate every execution.

The objectives are what the project set out to build. The results chapters answer four research questions that the objectives make testable. Each is mapped to the table that answers it, and §9.3 gives a one-line answer to each.

- **RQ1.** Is the Zero-Variance Fraction recomputable from stored reward tensors, and does it carry information about training outcome? Answered by the ZVF rows of Table 1.1 and §6.3.
- **RQ2.** With the training stack held fixed, do algorithm labels (PPO vs GRPO, GRPO vs Dr. GRPO) or group size separate on evaluation accuracy? Addressed by the same-stack rows of Table 1.1, the loss-form table in §4.3, and §6.2.3, §6.4 and §6.5. The experiments reported here can bound this question but not answer it: the PPO/GRPO, group-size and arithmetic GRPO/Dr. GRPO contrasts were all run on a saturated task at evaluation accuracy near 0.99, and the two unsaturated GRPO/Dr. GRPO comparisons (§1.2, §6.5.4) are inconclusive and establish

no equivalence (§9.3). A same-stack rerun on an unsaturated task (§6.5.5) finds no detectable gain for a minimal untuned-critic PPO arm while the GRPO arms gained (exact sign-flip p = 0.0625, the n = 5 floor, before paired-t p = 0.016), which is not evidence about PPO versus GRPO as algorithms, while the G = 2 versus G = 8 contrast is inconclusive. The saturated contrasts are pilot/feasibility evidence only; RQ2 rests on the unsaturated comparisons, and a powered, item-paired, training-disjoint design remains required future work.

- **RQ3.** Can a machine-readable stack manifest identify declared stack mismatches and assign an ordinal comparison code to two runs? Answered by §7.2 (registry health and `stackdiff`).
- **RQ4.** What does a governance-first evaluation of one trained actor yield, and what can it not establish? Answered by Table C.3 and Tables 8.A and 8.B.

Contributions. Measured against these objectives, the thesis makes four contributions. Everything else in it is supporting evidence for one of them.

1. **A recomputable signal-starvation diagnostic and a loss-form audit.** ZVF is logged per step and recomputed from stored reward tensors against a closed-form Bernoulli null (§4.3, §6.3). Reading the runner code distinguishes custom REINFORCE group-mean loops from clipped surrogates, nonzero-KL configuration records and unknown managed settings (Table 4.2).
2. **Stack-conditioned reporting.** A minimum reporting standard (P5) and a machine-readable stack registry with `stackdiff`, which reports declared-difference codes (R0–R5; formerly "flip-risk" verdicts, renamed 19 October 2026 — not calibrated label-flip probabilities) between two runs from their records alone (Chapter 7).
3. **Calibrated negative results.** No reliable scaling law is recovered from reward curves; the same-stack PPO/GRPO and group-size contrasts are nulls on a saturated task, and on an unsaturated rerun only the PPO/GRPO gap appears, from an untuned critic; ZVF predictive validity remains unestablished because the historical correlation mixes synthetic cells and heterogeneous outcomes; and the ZVF-derived controller's zero-rescue counterfactual is imposed by a plug-in model fitted to observed all-equal groups, not a test of fresh-rollout recoverability. Each is reported with the power limitation that bounds it (Chapters 6–7).
4. **An evaluation-governance protocol.** Native graders at pinned revisions, per-lane receipts, a no-pooling rule, a per-lane serving audit and a paired same-engine trained-versus-base design, exercised on one lightly trained actor across fourteen suites absent from its recorded training-suite list (Chapter 8). Content-level decontamination remains unverified. The contribution is the protocol and the record it produces, not the actor's scores.

1.5 Scope and Non-Goals

The C1 extension dated 3 October 2026 adds a frozen-policy diagnostic whose chief limitation is the reference itself. Exact-match zeros can reflect an incorrect key, ambiguous wording or equivalent units as well as a wrong response. Among the first 64 eligible questions from a fixed 4,096-question screen, the frozen score records 11 fresh-response events; assistant-assisted review corroborates three numerical witnesses on the same denominator. This extension separates scoring from semantic support and does not imply reasoning improvement, useful RL gradients or training gain. Section 7.5 and Appendix G retain the full accounting, including disagreements. Historical V2 remains separate.

The scope of this report is measurement and diagnostics, not leaderboard performance. The controlled studies and the campaign actor use small-to-mid open models — the Qwen2.5, Qwen3, Qwen3.5 and Qwen3.6 families, from roughly 0.5B parameters up to the 35B sparse mixture-of-experts configuration used for the campaign actor. The P1 cross-scale roster is wider, 0.6B to 1T total parameters, but its frontier-scale anchors are single-seed runs through a managed API and are read descriptively (Chapter 6 §6.1; source: platform_hybrid/paper/sections/p1_abstract.tex). Verifiable rewards come from mathematics and code checkers, principally GSM8K exact-match and HumanEval-style unit tests. Held-out evaluation uses suites' own native evaluators at pinned revisions.

Several things are explicitly out of scope. This is not an attempt to set a state-of-the-art result on any benchmark, and no such claim is made anywhere in the report. It is not a study of frontier reasoning models. The evaluation sets used in the controlled comparisons are small, and their sizes differ by study: 200 fresh prompts for the 0.5B arithmetic runs, 200 per seed for the 1.5B GSM8K chain-of-thought runs, 500 for the variant audit, and only 8 to 20 in several Phase-1 openings (the layer-freeze result rests on n = 8). Table 1.1 gives the n behind each headline number. Claims about novel algorithms are not made: the length-weighting intervention (P4) and the adaptive controller (P7) were designed during the work and are reported as designed and simulated systems with their evaluation limits attached, not as demonstrated improvements.

The report states negative, null and withdrawn results alongside positive ones; this is its one general statement about reporting practice, and later chapters report the results without repeating it. Three evidentiary rules apply throughout and are worth stating here because they constrain what the later chapters are allowed to say. First, every number in this report is traceable to a repository file that was actually read; where a figure could not be sourced, the finding is described qualitatively and the figure is attributed to its source rather than reconstructed. Second, original-contract and replacement-scope benchmark results are never pooled and never averaged across suites — the two are dif-

ferent measurements of different things under different licences, and treating them as one column would manufacture a number that no suite reported. Third, no improvement over a baseline or over a base model is claimed unless the source states it with a test; where the source reports a difference without a test supporting it, or reports an inconclusive test, that is what is written here.

1.6 Contribution of the Candidate

This report covers work that spans two semesters and two very different modes of authorship, and the distinction matters for how the contribution should be assessed. Semester 3 was a group project (Group 6). The multi-framework repository, the baseline integrations, the initial Tinker, SkyRL and GRPO experiments, the literature foundation, and the early benchmark, evaluation and reproducibility scaffolding were produced by that group, of which the candidate was a member. Semester 4 is the candidate's individual continuation, and the new research direction, the experiment expansion, the analysis, the report writing and the P1–P8 internal reports are the candidate's solo work (Figure 1.3).

The boundary is recorded precisely rather than loosely. The inherited state is frozen at the Git tag `capstone-final-2026-04-25`, corresponding to boundary commit `21a99ef766543a1ca86bfbad188445d3596ea73c` of 23 April 2026. At the time the separation was documented, 584 commits had been made after that boundary, touching 5,050 changed files — a figure the provenance record explicitly declines to present as a measure of academic contribution, since it counts mechanical and generated changes alongside substantive ones. The transition to explicit solo authorship is marked by commit `282e6b4f0f158de11b3f5bb4656e2d871f68f5c0` of 7 July 2026.

What was added after that boundary is the substance of this report. It includes the eight unpublished internal research reports: P1, a cross-library and cross-scale study of GRPO behaviour; P2, the Zero-Variance Fraction as a descriptive diagnostic; P3, group size, contrast density and the relationship to DPO; P4, length bias and held-out generalisation; P5, the minimum reporting standard for stack-conditioned results; P6, a machine-readable GRPO stack registry; P7, an adaptive group-size controller derived from the signal-starvation diagnostic; and P8, a side study comparing a language model against gradient-boosted trees in credit-card fraud detection. It includes the post-capstone experimental, audit, synthesis and report iterations — 206 recorded analysis iterations — the Berkeley-course-derived research audits and prototypes, the expanded statistical analyses, and the new GRPO diagnostics and controllers. And it includes the E1–E14 benchmark campaign, in which a single Tinker-trained actor (base `Qwen/Qwen3.6-35B-A3B` at commit `995ad96e`…, with the `campaign-adapter` adapter

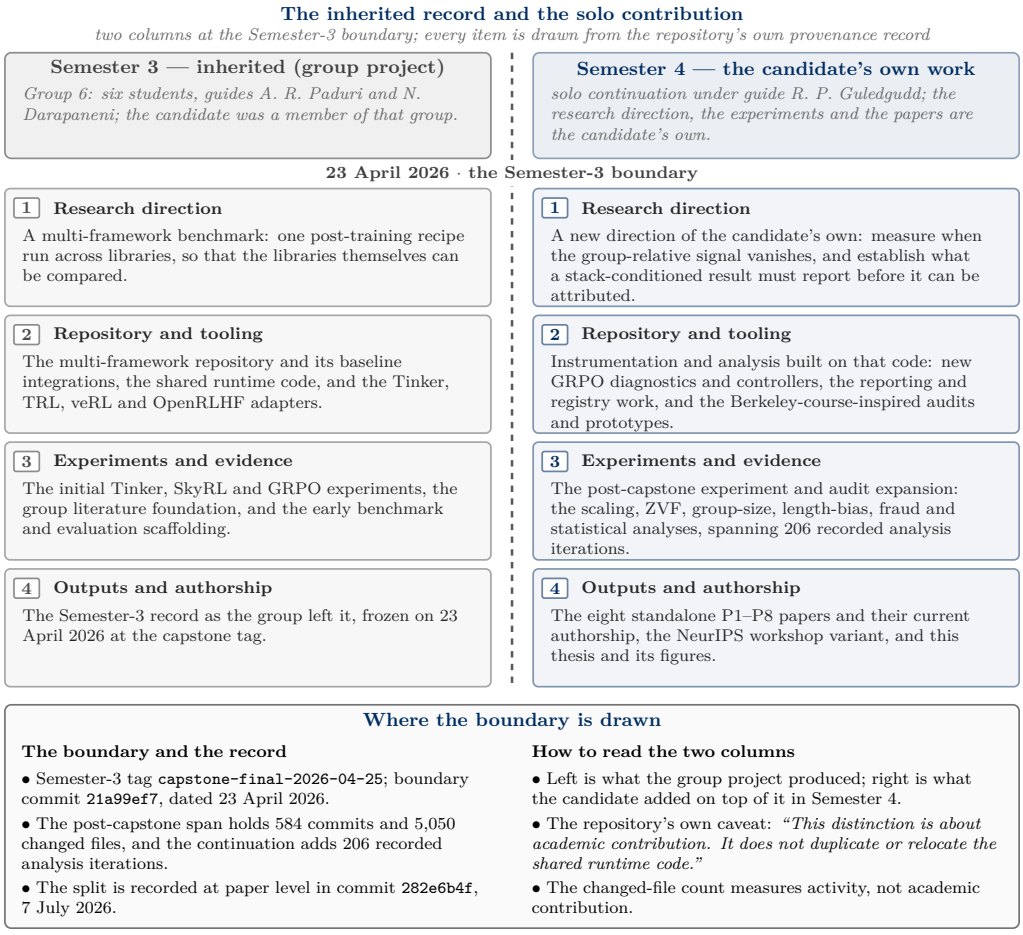


Figure 1.3: Boundary between the inherited Semester-3 group infrastructure and the individual Semester-4 contribution reported in this document. Both columns are drawn from the repository's own provenance record (the Semester-3 tag and boundary commit, the post-boundary commit and file counts, the solo-authorship commit, and the Semester-4 README with its paper-to-evidence map); where the record does not settle a claim, the claim is left out rather than inferred.

at commit `withheld-adapter-revision…`, in bfloat16) was evaluated against fourteen suites under receipt, budget and decontamination governance. Its results are reported per suite in Chapter 8 and never pooled; Table C.3 is the single source for each lane's scope and terminal state.

Two further contributions deserve naming because they are contributions of restraint rather than of result. The first is that the campaign's negative findings were kept rather than discarded. A later BankerToolBench report records 100 base-model trials with mean reward 0.0. The underlying trajectories remain unavailable, and the earlier recovered finish ledger predates that rerun. The bridge's missing stop sequences provide a plausible failure mechanism, but the available comparison does not identify its contribution to the full aggregate zero. The finding is a source-limited, confounded diagnostic rather than a controlled model-capability estimate (Chapter 8 §8.5). The second is the discipline applied to the project's own claims: the same-stack audit that invalidated the pre-audit aggregator's "disappears" verdict did so on the strength of the study's own locked minimum detectable effect, and the permitted wording it left in place is narrower than the finding it refuted.

The report does not reallocate the shared runtime code. The inherited repository remains where it was; the Semester 4 internal reports cite their canonical LaTeX sources and evidence directories rather than duplicating them, and the distinction recorded here is a distinction about academic contribution, not about file ownership.

1.7 Organisation of the Report

The report is organised in four parts.

Part I — Foundations contains the present chapter, followed by Chapter 2, the literature survey, which situates the work against the RLHF and RLVR literature, the critic-free line of estimators, the group-size and advantage-estimation literature, and the reproducibility and reporting literature on which the provenance argument depends; and Chapter 3, the system requirements specification, which states the functional and non-functional requirements the harness, the telemetry layer and the campaign infrastructure were built to satisfy.

Part II — Design and Implementation contains Chapter 4, the proposed methodology, which sets out the measurement design, the statistical protocol, the evidence rules and the study-to-evidence mapping; and Chapter 5, the implementation details, covering the multi-framework harness, the per-step telemetry and raw tensor persistence, the campaign launcher and its receipt and budget governance, and the registry and validator components.

Part III — Results contains three chapters. Chapter 6 reports the core GRPO studies — the cross-library and cross-scale scaling work, the ZVF diagnostic, the group-size and contrast-density sweep, and the length-bias and held-out generalisation study, corresponding to P1 through P4. Chapter 7 reports the reporting, registry and controller work, corresponding to P5 through P7, including the minimum reporting standard, the machine-readable stack registry, and the simulated behaviour of the adaptive group-size controller. Chapter 8 reports the E1–E14 benchmark campaign: the actor, the governance model, the strictly completed scopes, the original-contract scores, the incomplete and blocked lanes, the verification results and the campaign's terminal states.

Part IV — Synthesis contains Chapter 9, which draws the cross-study synthesis, states the threats to validity, gives the conclusions the evidence will bear, and sets out future work and the reopen conditions under which the blocked lanes could be completed.

Ten appendices follow. Appendix A gives the historical run registry and its identity reconciliation. Appendix B documents reproducibility and provenance, including the inherited-versus-individual boundary and the environment records needed to reproduce the reported results. Appendix C gives the notation, symbols and abbreviations used throughout, and its Table C.3 is the single record of each E1–E14 lane's scope, status and receipt. Appendix D holds the lane-by-lane campaign detail moved out of Chapter 8. Appendix E lists corrections applied to internal source documents. Appendix F reports the applied fraud-detection side study (P8), which uses synthetic data and supervised fine-tuning and so sits outside the RL contribution. Appendix G records the C1 case ledger, reference classifications and source bindings. Appendix H is the evidence map for the preceding scientific chapters and appendices, arranged section by section. Appendix I records the scientific coverage audit and public-source verification boundary. Appendix J records the number audit, distinguishing artifact comparisons, printed-count calculations and context-only occurrences.

1.8 Canonical Numbers

Public-verifiability disclosure (19 October 2026). The fresh public-checkout number audit of the 11 October sources is INCOMPLETE: 970 registered occurrences, 828 PASS, 22 CONTEXT (context-only, not independently checked), 120 ARTIFACT_MISSING, zero failed and zero unbound (`reports/public_revision_2026-10-11/PUBLIC_CHECKOUT_NUMBER_AUDIT.json`). Of the 828 passes, 33 are arithmetic from printed counts and 501 are token-presence checks against the project's own source files; only the remainder recompute from stored data. The 120 missing-artefact occurrences fall in the campaign figures of Chapter 8 (59), the §9.1 restatement and

Table 9.1 (16), Table A.8 (17), the §7.1 manifest–outcome Mantel statistics and §7.2 same-stack method deltas (24), and Table A.10 (4). Those figures are *reported, not publicly verifiable* from this package; the corresponding row of Table 1.1 is labelled accordingly. Recomputation from stored tensors (an independent check) must not be conflated with closed-system consistency checks against the project's own printed sources. No controlled-access deposit is asserted here (AUTHOR_TODO).

Several quantities in this report were measured more than once, in different regimes, and appear in the sources with different values. Table 1.1 fixes one row per measurement, with the model, task and group size it belongs to, the number of seeds and evaluation items behind it, and the file it comes from. Where the text quotes one of these quantities, this table is the reference, and a value that differs from its row is a different measurement, not a correction. Per-lane E1–E14 figures are kept in Table C.3.

Canonical numbers.

Table 1.1: Canonical numbers. "results/" is `platform_hybrid/experiments/results/`; "sections/", "archive/" and "neurips_2026_variants/" are under `platform_hybrid/paper/`. The Qwen3-8B GSM8K GRPO training-reward rows use different summaries (last-10 mean, trace mean, pooled) and the sources do not establish that they come from the same run, so they are not interchangeable.

Quantity	Value	Model / task / G	n	Source
Phase-1 batch ZVF	0.72–0.77 (all-correct 0.65–0.71)	Qwen3.5-4B, GSM8K, G = 8; four methods × 40 steps, 16 prompts per step	1 seed	`Phase1_Project_Report_ZVF.tex`
ZVF, sampling only (P2 recomputation)	0.130 / 0.190 / 0.155; pooled 0.158	Qwen3-8B, GSM8K test problems, G = 8, T = 1.0, no training	3 seeds × 200 problems	`results/tinker_gsm8k_zvf_s{42,123,456}.json`
ZVF by group size (REINFORCE group-mean)	0.838 / 0.764 / 0.691 / 0.631 at G = 2 / 4 / 8 / 16 (fall of 0.207)	Qwen2.5-0.5B, two-digit addition	3 seeds × 40 steps per G	`results/groupsize_zvf_sweep.tsv`
ZVF, nine-row mitigation panel ("vanilla GRPO" 0.481)	declared simulation projection, not a measurement	synthetic, K = 8	—	`sections/zvf.tex`
Historical mixed-source ZVF association (interpretation withdrawn)	Spearman $\rho \approx 0.27$, 95% CI $[-0.37, 0.88]$ as originally reported	heterogeneous metrics, including training reward and simulation	source says 23; 17 finite cells, 9 synthetic	§6.3.4; Colab lineage audit; Table A.5 (P2-C2)
ZVF vs performance, pooled across task types	r = −0.769 (confounded by task type)	5 model families, tool-use and GSM8K	N = 15 experiments	`neurips_2026_variants/paper_P8_workshop.tex`
ZVF vs final accuracy	r ≈ 0.09	instrumented runs	n = 12	`sections/appendix_zvf_formalization.tex`
Same-stack PPO vs clipped-GRPO (saturated; pilot only)	GRPO 0.990, PPO 0.992; paired Δ = −0.002, exact sign-flip p = 0.625, paired-t p = 0.374	Qwen2.5-0.5B, two-digit addition, G = 8 (PPO: 128 prompts per step)	5 seeds (paired by seed, not by item) × 200 fresh draws per arm from the training generator	`results/samestack_ppo_grpo.json`

Quantity	Value	Model / task / G	n	Source
Same-stack clipped-GRPO vs minimal untuned-critic PPO, unsaturated (RQ2 evidence)	post-training accuracy GRPO (G = 8) 0.245, GRPO (G = 2) 0.250, PPO 0.195; GRPO G8 − minimal untuned-critic PPO (8× prompt exposure) +0.050 [+0.015, +0.085], exact sign-flip p = 0.0625 (n = 5 floor), paired-t p = 0.016; G8 − G2 −0.005 [−0.038, +0.028]	Qwen2.5-1.5B-Instruct, GSM8K-CoT, 200-token cap, 64 generations per step, 30 steps	5 paired seeds × 200 GSM8K test items	`results/samestack_gsm8k_cot.json`
Group-size sweep, evaluation accuracy (REINFORCE group-mean; saturated, pilot only)	0.982 / 0.988 / 0.990 / 0.978 at G = 2 / 4 / 8 / 16	Qwen2.5-0.5B, two-digit addition	3 seeds × 200 fresh draws	`results/groupsize_zvf_sweep.tsv`
Clipped-GRPO vs Dr. GRPO, arithmetic (saturated)	0.987 vs 0.992, p = 0.35; completions 4.7 tokens	Qwen2.5-0.5B, G = 8, 40 steps	5 seeds × 200	`results/drgrpo_vs_grpo.json`
GRPO / Dr. GRPO pre → post	0.202 → 0.263 / 0.205 → 0.255	Qwen2.5-1.5B-Instruct, GSM8K-CoT, 200-token cap, G = 8	3 seeds × 200	`results/drgrpo_gsm8k_cot.json`
Qwen3-8B pre → post (GRPO)	82.0% → 83.3%, p = 0.26	Qwen3-8B-Instruct, GSM8K; 82.0% is the same checkpoint before RL	5 seeds	`archive/absorbed/U01_main_compendium/main.tex`
Variant audit, DAPO − GRPO	Δ = +0.001, paired-t 95% CI [−0.00632, +0.00832]; no BH rejection	Qwen3-8B, GSM8K, five arms	8 seeds × 500	`zvf-program/audit/results/full/`; `statistical_refutation.md`
Tinker vs TRL, Qwen3-8B GSM8K (loss form unknown)	last-10 training reward 0.856 (Tinker, Qwen3-8B-Base) vs 0.050 (TRL, Qwen3-8B Instruct)	GSM8K-500, G = 8, 30 steps	1 seed each	`results/framework_comparison.json`
Qwen3-8B GSM8K GRPO, reproduction headline	last-10 training reward 34.4%, peak 62.5%	Qwen3-8B, LoRA 32, G = 8, 30 steps	seed 42	`REPRODUCE.md`
Qwen3-8B GSM8K GRPO, P1 anchor fit	mean training reward 0.285, peak 0.625	Qwen3-8B, GSM8K	1 seed	`sections/scaling_laws.tex`
Pooled Tinker vs TRL training reward	99.9% vs 73.4%	Tinker runs pooled over 4B–235B models vs TRL on Qwen2.5-0.5B	pooled	`LIMITATIONS_AND_IMPACT.md` §6.2
Layer-freeze held-out gain	+0.0625 (full) vs +0.000 (frozen)	Qwen2.5-1.5B-Instruct	2 seeds × 8 items	`results/p1_layerfreeze/FREEZE_FINDINGS.md`
Curriculum opening held-out gain	+0.05 in both arms	Qwen3.5-4B, GSM8K, G = 4	1 seed × 20 items	`results/curriculum_opening/FINDINGS.md`

E1–E14 lane figures (end-to-end harness scores; stored-evidence, not replayed; reported, not publicly verifiable from this package — §1.8)	see Table C.3	Qwen3.6-35B-A3B + seed809 adapter (executed loss unknown)	per-lane native denominators	`outputs/E1_E14_FINAL_RESULTS_2026-09-19.md`

Chapter 2

Literature Survey

This chapter surveys the prior work on which the project is built and the gap it occupies. It revises the survey of the Phase-1 report, retaining that survey's seven-part structure and updating each part with the material the Semester 4 work added: the P1–P8 internal reports and the E1–E14 evaluation campaign. Material on RLHF, PPO, DPO, GRPO, DeepSeek-R1, parameter-efficient fine-tuning and evaluation benchmarks also draws on the Semester-3 Group 6 capstone literature survey [2], a group work of six authors of whom the present author was one; where this chapter reuses that survey's findings they are attributed to it here. Two rules of construction carry over from Phase 1. The first concerns proportion. The contribution of this project is overwhelmingly a contribution of measurement and reporting practice rather than of a new training algorithm, so the literature that establishes measurement practice receives more room here than the literature that establishes methods. The second concerns evidence. A figure is quoted only where a repository source actually states it; where a source states a finding without giving a number, the finding is described qualitatively and the chapter says so. Where the project's own documents state the same quantity differently, the divergence is reported rather than silently reconciled, and Section 2.5 records one such divergence in full.

2.1 From RLHF and PPO to Group-Relative Methods

Policy-gradient post-training of language models begins with the RLHF pipeline. Christiano et al. [3] established the pattern of reward-model training on human pairwise preferences followed by reinforcement learning against that reward model, on Atari and MuJoCo tasks starting from a randomly initialised policy; the supervised fine-tuning stage that precedes both in the language-model pipeline was added in later work [4, 5]. Ziegler et al. [6] adapted the pattern to language, collecting approximately 60,000 comparisons and, following Jaques et al. [7, 8], adopting the per-token KL penalty against a frozen

reference policy that has been standard ever since. Stiennon et al. [4] scaled the recipe to a 6.7B summarisation model with 64,832 comparisons, demonstrated transfer to an out-of-distribution summarisation set (CNN/DailyMail), and produced early empirical evidence of reward over-optimisation: continued optimisation against a frozen reward model eventually degrades the true objective. Ouyang et al. [5] then built InstructGPT, whose three-stage pipeline used roughly 40 contractors to produce about 13,000 supervised fine-tuning prompts, about 33,000 reward-model prompts, and about 31,000 PPO prompts. Two details of that work matter for this project. First, the reward model was 6B rather than 175B because the larger reward model proved unstable during training — a reminder that the reward model is itself a trained component with its own failure modes. Second, the preference data were collected as rankings of $K \in \{4, \ldots, 9\}$ responses, which yields $\binom{K}{2}$ pairwise comparisons from a single annotation batch; this is precisely the within-prompt comparative structure that group-relative methods would later exploit directly. InstructGPT's headline results were that a 1.3B InstructGPT was preferred to the 175B GPT-3 base model, that the 175B InstructGPT was preferred to GPT-3 in 85% of evaluations, that hallucination on a closed-domain task fell from 41% to 21%, that about 25% fewer toxic outputs were generated when prompted to be respectful, and that TruthfulQA performance roughly doubled; inter-annotator agreement was approximately 73%. The same source records four limitations — annotation cost, reward-model over-optimisation, the difficulty of aligning to user intent rather than to annotator preference, and the residual capability costs of alignment (Figure 2.1).

The optimiser for that pipeline was PPO [9]. PPO's clipped surrogate, with $\varepsilon = 0.2$ as an illustrative setting, removes the incentive for certain ratio changes beyond the clipping interval; it does not impose a hard bound on every updated policy ratio. Generalised advantage estimation [1] with illustrative settings $\lambda = 0.95$ and $\gamma = 0.99$ provides a value-based advantage estimate; these are not universal defaults for language-model training. Recasting language generation as an RL problem makes the state the prompt plus generated prefix, the action the next token, the policy the language model, and the reward sparse and terminal. The practical consequence is a four-model architecture — policy, reference, reward, and value — whose memory cost depends on which components are trained, their sizes, optimiser states, precision and placement; counting four components does not establish a fourfold memory ratio to supervised fine-tuning; PPO-ptx mitigates capability regression by mixing pretraining gradients into the update. Zheng et al.'s "Secrets of RLHF" study [10] identified policy constraints as a key factor in stable PPO implementation, examining reward hacking, length growth and pattern collapse under its experimental settings. That finding is the intellectual ancestor of the zero-variance analysis in this project, because it locates the failure mode in the constraint structure rather than in the objective.

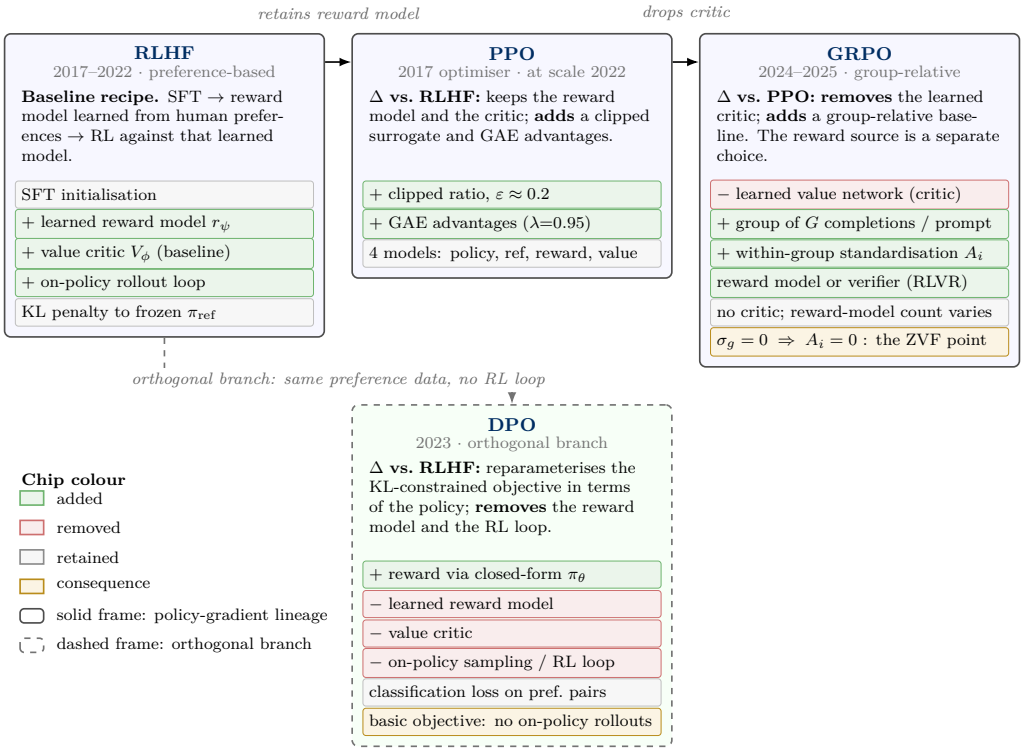


Figure 2.1: Algorithmic lineage from RLHF through PPO to GRPO, with DPO as an orthogonal branch. Each transition removes a component or substitutes a cheaper estimator; GRPO removes the critic and replaces it with a group-relative baseline. DPO (dashed frame) removes the on-policy loop and explicit reward-model fitting, optimizing a preference objective on a fixed dataset. Stability is not guaranteed by this diagram. Dates are first publication or first use at scale. GRPO variants (DAPO, Dr. GRPO and others) are discussed in the text and not drawn.

Group Relative Policy Optimization (GRPO), introduced with DeepSeekMath [11], removes the learned value network altogether. For each prompt it samples a group of G completions, scores them with a reward function, and standardises each completion's reward against the group mean and standard deviation; the resulting z-score serves as the advantage for every token of that completion. In the DeepSeekMath configuration G = 64 and $\beta = 0.04$. Eliminating the value model reduces the number of trained and served models from four to three; the paper motivates this as reducing PPO's memory usage but does not quantify the saving. DeepSeekMath-RL 7B reached 51.7% top-1 accuracy on MATH against a 46.8% supervised fine-tuning baseline, 60.9% with self-consistency over 64 samples, GSM8K improved from 82.9% to 88.2%, and CMATH improved from 84.6% to 88.8% despite no Chinese data in the RL training set. The paper's iterative variant retains 10% of historical data in a replay buffer to prevent catastrophic forgetting in the co-evolving reward model. RLOO [12] is the closely related leave-one-out estimator that baselines each sample against the mean of the *other* samples in the group; it already performs a within-group baseline, and is therefore directly relevant to the signal-starvation analysis this project conducts.

DeepSeek-R1 [13] then demonstrated that pure outcome-reward RL can elicit chain-of-thought behaviour from a base model without supervised cold-start data. R1-Zero was trained on DeepSeek-V3-Base, a 671B mixture-of-experts model, using rule-based rewards only and no neural reward model. AIME 2024 pass@1 rose from 15.6% to 71.0% over training in the original preprint — the *Nature* version cited here reports 77.9% after extended training — with consensus decoding over 64 samples (cons@64) reaching 86.7% and MATH-500 reaching 95.9%. The source states the training configuration as 16 sampled outputs per question (the group size), a training batch of 512 outputs (32 questions $\times$ 16 samples), a learning rate of 3×10^{-6}, a KL coefficient of 0.001, and approximately 10,400 policy update steps. The paper documents spontaneous chain-of-thought, self-verification, and the widely reported "aha moment" as emergent rather than taught behaviours. The full R1 model, trained with a four-stage pipeline that includes a language-consistency reward, reports 79.8 on AIME, 97.3 on MATH-500, and 71.5 on GPQA, against 79.2 / 96.4 / 75.7 for o1-1217. Distillation into six students from 1.5B to 70B produced Distill-Qwen-1.5B at 28.9% AIME and 83.9% MATH-500, and Distill-Qwen-32B at 72.6% and 94.3%, against 47.0% and 91.6% for Qwen2.5-32B-Zero trained from scratch; the 7B and 16B base models failed to show meaningful reasoning gains from direct RL.

For this project, the significance of that lineage is narrower than the headline numbers suggest. The outcome-reward GRPO estimator uses within-group standardisation. An unregularized z-score is undefined when all rewards coincide; the epsilon-guarded estimator used here instead returns zero advantages. Homogeneous groups can be common

when correctness probability is near zero or one, but their observed frequency depends on task, model, reward definition and group size. The rest of this chapter and the empirical chapters that follow are concerned with what that degeneracy does to the training signal, and with how honestly the field currently reports it.

2.2 Direct Preference Optimisation as a Contrast

Canonical offline Direct Preference Optimization (DPO) [14] fits a policy directly to preference pairs, without a separately fitted reward model or on-policy sampling during fine-tuning. Under its preference-model assumptions, a reparameterisation connects the preference loss to a KL-constrained reward objective. This removes components of the PPO training stack; no universal memory or wall-clock saving is asserted here. The original paper evaluates sentiment control, summarisation and dialogue, and leaves broader generalisation, over-optimisation and scaling questions open. Static preference collection differs from the online verifier-driven rollouts studied here, but that distinction does not establish that DPO is generally inferior at long-horizon reasoning. The earlier internal survey's stale-reward and credit-assignment characterisations are therefore not treated as demonstrated findings of the DPO paper.

The contrast is structurally instructive for this project. The canonical offline DPO objective does not standardise within a sampled group, so it does not have this particular zero-variance denominator: its contrast is supplied by the preference dataset. It also does not itself specify an online verifier-driven sampling loop. A verifier can still supply preference labels for that dataset; the distinction here concerns the training objective and collection protocol, not an impossibility of combining DPO with verifiable feedback. Group-relative RLVR constructs its contrast during rollout, making the frequency of homogeneous reward groups a relevant measurement. The broader preference-optimisation literature includes Identity-PO (IPO) [15], KTO [16], ORPO [17], SimPO [18], and SLiC [19] among them — which the project's cross-library protocol treats as no-rollout baselines.

The boundary between the two families is also less sharp than it first appears. Wu et al. [20] argue that GRPO is "secretly DPO" — that its efficacy stems from an implicit contrastive objective, which makes it structurally related to DPO — and report that 2-GRPO retains 97.6% of the performance of 16-GRPO at 12.5% of the rollouts (arXiv v3; the earlier v2 reported 98.1%). That contrastive interpretation motivates the PCD statistic used here. The empirical binary-reward statistic $\widehat{\mathrm{PCD}} = |B|^{-1} \sum_g \widehat{p}_g(1 - \widehat{p}_g)$, where $\widehat{p}_g$ is the observed correct fraction of group g, has expectation PCD = ((G − 1)/G) · E[p(1 − p)] under conditionally independent Bernoulli rewards with per-prompt

probability p. It supplies a magnitude-aware contrast summary rather than a measured gradient norm, and the group-size question becomes a question about how much contrast a given sampling budget buys. The present project is careful about what it inherits from that argument: the reduction is cited as prior theory, while the empirical claims resting on it are scoped to this project's own measurements, reported in Chapter 6.

2.3 Fixing GRPO's Biases and Collapse

A dense and fast-growing literature targets specific GRPO pathologies. Dr. GRPO [21] removes two normalisation terms from the standard objective — the per-response 1/L factor and the question-difficulty amplification — restoring the sequence-level gradient up to a global scale, and is motivated as a fix for an optimisation bias in GRPO that artificially inflates response length, especially of incorrect responses. DAPO [22], from ByteDance, changes four things in one release: asymmetric Clip-Higher clipping, dynamic sampling that resamples until the batch carries signal, token-level loss normalisation, and over-long filtering; the reported result is 50 points on AIME 2024 with a 32B model. GSPO [23] (Qwen team, 2025) moves the importance ratio from the token level to the sequence level and was credited with stabilising the Qwen3 series, particularly its mixture-of-experts variants. Production-side variants include VAPO [24], a value-based PPO framework for long chain-of-thought reasoning.

A third thread attacks the zero-variance failure mode directly, and this is the thread the project's own diagnostic sits in. GRESO [25] predicts prompt informativeness before rollout and skips prompts predicted to be uninformative; this reduces sampling cost without guaranteeing that every uninformative prompt is excluded. CPPO [26] prunes completions after rollout, reporting up to 7.98× speedup on GSM8K. NGRPO [27] calibrates advantages using a virtual maximum-reward sample, giving homogeneously incorrect samples nonzero advantages, and combines this with asymmetric clipping. Scaf-GRPO [28] injects tiered scaffolding hints when learning stagnates, reporting a 44.3% relative improvement on AIME 2024. MO-GRPO [29] addresses vanilla GRPO's collapse to a single reward component under multiple objectives through variance-based reward reweighting. SSPO [30] operates at subsentence granularity to balance GSPO's stability against token-level GRPO's expressiveness, raising GRPO's five-benchmark mathematics average from 43.01 to 46.72 on Qwen2.5-Math-1.5B. RL-ZVP [31] takes the opposite approach to filtering: it extracts signal *from* zero-variance prompts through entropy-guided advantage shaping. AERO [32] instead adapts the rollout allocation and prunes rollouts to avoid zero-advantage dead zones. GVPO [33] uses a group-centred squared-error relationship between implicit and actual rewards, derived from a KL-constrained reward-maximization objective. The tail continues with λ-GRPO [34], MC-GRPO [35]

(median-centred advantage), G^{2}RPO-A [36], ConSPO [37], and Goldilocks RL [38].

One act of bookkeeping in this literature deserves emphasis, because it is a claim about what may *not* be inferred. AVSPO [39] and other interventions are described in the project's own related-work source as prior or concurrent interventions, not as evidence for this project's runner, and the internal report explicitly claims neither priority nor an intervention effect over them. The present thesis inherits that disclaimer without qualification.

Against this background, the project's own contribution to the area is deliberately meagre in algorithmic ambition and deliberately demanding in evidential standard. The Zero-Variance Fraction (ZVF) — the fraction of groups whose completions are all correct or all incorrect — was reported across libraries, model scales, and training phases in the companion ZVF report (P2). The later source audit shows that its pooled collapse and outcome associations mix synthetic and measured records with heterogeneous targets (§6.3.4), so they do not validate measured collapse tracking or held-out prediction. ZVF is mechanically entangled with accuracy and group size; its defensible role here is descriptive instrumentation. A minimal binomial model of group degeneracy was then proposed, in which the expected ZVF indicator is $h_G(p) = p^G + (1-p)^G$ and the usable signal is $S = p(1-p)(1-h_G(p))$; three regularities follow in closed form, each paired with an empirical check drawn from a 368-run Weights & Biases audit that counts all logged runs and is therefore a superset of the benchmark's 70+ core training runs. Because $h_G(p)$ is symmetric under $p \leftrightarrow 1-p$, ZVF assigns the same value to a mastered prompt and to a hopeless one, producing the U-shape measured across six model labels in a 368-run audit; and exact-tie ZVF is sensitive to reward rounding: jitter of order 10^{-4} eliminates exact ties while shifting measured within-group contrast by less than 10^{-6}. This does not hold for the declared sample-variance threshold of 10^{-6}, which retains 95/600 groups before and after jitter (§6.3.1). Pairwise-contrast density is proposed as a magnitude-aware candidate control signal, without this test establishing its superiority over tolerance-based ZVF, and the toy-scale validation reports a gradient-norm correlation of corr = +0.71, marked directional only. The word *controller* in that work names the implemented policy, not an established improvement: the decisive static-G = 16 matched-token bakeoff remains unrun.

The one genuinely measured GRPO-variant comparison in the repository is a Dr. GRPO versus GRPO control. On Qwen2.5-0.5B two-digit arithmetic at group size 8, 40 steps, and 5 seeds, both arms were at ceiling and indistinguishable: GRPO 0.987 ± 0.003 against Dr. GRPO 0.992 ± 0.003 (mean ± SE over 5 seeds; SDs 0.006 and 0.008), paired difference +0.5 percentage points, t = 1.05, df = 4, p = 0.35; mean completion length was 4.74 against 4.71 tokens. At that ceiling, and with completions under five tokens, the task cannot show either an accuracy or a length difference. In a second regime —

Qwen2.5-1.5B-Instruct on GSM8K with a 200-token chain-of-thought cap and 3 seeds — GRPO moved from 20.2% to 26.3% and Dr. GRPO from 20.5% to 25.5%; per-seed McNemar tests were significant in 2 of 3 seeds for GRPO ($p = 0.071, 0.036, 0.016$) and 1 of 3 for Dr. GRPO ($p = 0.122, 0.017, 0.122$), and the pooled $p < 10^{-3}$ is expressly rejected as overstating significance; with the seed as the unit, one-sample t-tests on the three per-seed gains give $p = 0.005$ (GRPO) and $p = 0.010$ (Dr. GRPO) (recomputed from drgrpo_gsm8k_cot.json). Neither arm inflated length over 30 steps (GRPO 195 → 180 tokens; Dr. GRPO 194 → 187). The same source contains head-to-head and rank-correlation tables whose values are *projections*, not measurements: the GRPO baseline row is a synthetic baseline produced by a dry run of `platform_hybrid/experiments/variance_mitigation_integration.py`, the file states that it makes no measurement claim for any row of that table, the correlation coefficients (0.78 / 0.66 / 0.63 / 0.31) carry the same caveat, and the configuration proxies under `platform_local/unified/` are explicitly not faithful reimplementations. Those numbers are reported here only to mark them as unusable as evidence. The nearest thing to a headline cross-library effect in the project is also the one that must be read most carefully: holding the visible group size, learning rate, data, seed, and label fixed while changing stacks moved final GSM8K reward from 85.6% to 5.0%, a 17× swing; the audit that followed found the managed stack had also pinned a different base checkpoint (Qwen3-8B-Base on Tinker against the instruction-tuned Qwen3-8B on TRL), so the source describes this as an under-specification exhibit rather than a backend-only causal effect. The complementary telemetry fact is that running "DAPO" on an open Colab trainer whose dynamic sampling demonstrably filters zero-variance groups produced mean ZVF 0.00, while running "DAPO" on a closed managed stack where only an asymmetric-clip surrogate is user-settable produced mean ZVF 0.58 — the same label, opposite telemetry.

2.4 Verifiable Rewards, Frameworks and Reporting Practice

RLVR — reinforcement learning from verifiable rewards — was formalised for open post-training in TÜLU 3 [40], which is the source this project follows in treating a programmatic checker rather than a learned preference model as the reward. The implementation landscape the project unifies is crowded and heterogeneous. On the training side it includes TRL, OpenRLHF [41], veRL (HybridFlow) [42], NeMo-RL, DeepSpeed-Chat [43], trlX, Axolotl, and Tinker as a managed back-end; each makes different default choices about advantage normalisation, KL estimators, tokenisation loss masking, rollout batching, and importance-sampling granularity, and the project records these as candidate explanations for the observed cross-library gap. The comparison retains

checkpoint and managed-setting confounders, so their individual contributions are not identified (§5.2). On the inference side, vLLM [44] and SGLang [45] supply the rollout backends on which modern frameworks depend; FlashAttention [46] supplies an attention implementation, while LoRA [47] is a parameter-efficient adaptation method. The internal related-work source proposes Tinker as a substrate for future tool-use extensions. Its named interface is not independently bound to executable API evidence here. Tool-use and agentic RL remain settings in which the project's ZVF measurements need re-evaluation rather than assumed transfer.

The evaluation benchmarks are equally well established and equally awkward. GSM8K [48] contains 8,792 problems in the cited split, 7,473 training and 1,319 test, whose original study distinguishes single-sample fine-tuned generation from verifier-ranked multi-sample selection; GSM8K-Platinum [49] has since documented label noise in the original set, which is why the source describes the benchmark as necessary but not sufficient. MATH [50] comprises 12,500 problems across seven subjects and five difficulty levels, on which the original results reached 6.9%; MATH-500 is the 500-problem subset introduced with the Lightman process-supervision work [51], which is a distinct evaluation subset rather than the full MATH test split. Each AIME paper comprises 15 problems with integer answers in 0–999; score comparisons require the year, model revision, sampling rule and tool budget. The source frames chain-of-thought as a sequential action space and process reward models as a way to supply feedback beyond the terminal answer.

Reporting practice is where the project's own contribution is anchored, and its lineage is explicit. Model Cards [52] introduced documentation of intended use, out-of-scope use, and per-slice evaluation results; Datasheets for Datasets [53] addresses dataset documentation, covering composition, preprocessing, annotation process, and discriminatory-impact mitigation; Data Statements [54] added the speaker-demographic axis; and Data Cards [55] bridged research and industry practice with schema, provenance, sampling-distribution, and audit-transparency fields. A cross-coupling audit at iteration 109 maps these four works onto the project's legacy 18-field experimental manifest, showing that they cover 12 distinct fields, that the remaining six are either RL-specific (per-step ZVF, group-size schedule) or stack-coverage items with no direct analogue in the prior literature, and that items 9–12 — annotation process and annotator demographics — have the lowest evidence density in the live manifests. The same iteration verified all four entries against CrossRef metadata (4/4 pass on year, five-gram title, and author-family overlap ≥ 0.6) and retrofitted two entries that had been present in the bibliography but never cited. The resulting standard, MIN-REPORT-RL, has eight items: seven run-manifest fields and one evaluation item (held-out pass@k), which belongs to the evaluation report rather than to run-start stack identity. The count was aligned at eight on 2026-07-11, and

this thesis uses "the eight-item standard" and "the seven manifest fields" in that sense throughout.

The reproducibility literature to which this standard is a deliberate echo is older and better established. Henderson et al. [56] showed that deep-RL results depend on codebase, hyperparameters, and even the choice of random seeds, to the point that the same algorithm from two repositories behaves as two algorithms. Colas et al. [57] and Agarwal et al. [58] (`rliable`) supplied the statistical repair kit — rigorous comparison protocols and small-sample-aware aggregate metrics with interquartile-mean reporting and performance profiles. Jordan et al. [59] argued that rigorous benchmarking in RL is computationally prohibitive at the scale it would require, and called for an additional experimentation paradigm to complement it. Dodge et al. [60] proposed reporting expected validation performance as a function of compute budget; the project's run manifest is the RL-for-LLM analogue, replacing *budget* with *stack*. Pineau et al. [61] formalised the NeurIPS reproducibility criteria, and the project draws the explicit lesson that self-attested checklists have limits, which motivates an artifact-computed badge rather than a declared one. Statistical treatments of evaluation noise (Miller [62]) quantify the uncertainty floor against which the project's own within-noise findings should be read, and the evaluation-stack sensitivity documented by the LM Evaluation Harness effort [63], by audits of reasoning evaluations [64], and by contamination studies of the data side of the same coin, together establish that RL *training* inherits all of this — the verifier is an evaluator in the loop — plus the additional vectors unique to on-policy optimisation.

Three existing resources come closest to the project's registry and are the reason it exists in its present form. HELM [65] aggregates evaluation across a large model and scenario matrix, but its unit is the (model, scenario) cell, not the training stack. The LM Evaluation Harness [63] standardises evaluation by *executing* implementations, whereas the registry here standardises by *describing* stacks it cannot execute — many of them closed — which is precisely why the project required a null-versus-absent convention and an R5 rung that records un-auditability rather than converting it into a false value. Papers with Code catalogued paper–code–leaderboard linkage at scale, stopped at the repository boundary, and was discontinued in July 2025; the source treats its fate as a governance cautionary tale. The project's targeted search through July 2026 did not identify a resource combining executed loss form at GRPO-variant granularity, per-component implementation status and an unauditability marker. This bounds the search finding and does not prove that no such resource exists.

2.5 Scaling and Layer-Adaptation Context

Compute-optimal pretraining is governed by well-characterised scaling laws (Kaplan et al. [66]; Hoffmann et al., Chinchilla [67]), but RL post-training is much less well characterised, and the sources the project builds on separate cleanly into those that predict and those that describe. Hilton et al. [68] derived compute-efficiency frontiers for single-agent RL across Procgen games, Dota 2 and a toy MNIST-based task. For RLHF, Gao et al. [69] characterised the over-optimisation curve of reward models — the point at which additional optimisation against a frozen reward model buys a decreasing true objective — and Rafailov et al. [70] extended over-optimisation scaling laws to direct alignment algorithms (DPO, IPO and SLiC), which have no separate proxy reward model. Nimmaturi et al. [71] derived an empirical scaling law specifically for GRPO, identifying three training phases (slow start, rapid improvement, plateau) and reporting that most of the benefit is exhausted by roughly 80% of a single epoch. Tan et al. [72] treat group size as a budget knob in an empirical scaling study of GRPO post-training, in an appendix analysis showing that the optimal rollout size shifts with the training budget. Snell et al. [73] treat inference-time compute as a scaling axis in its own right, and the project's own related-work source cites these as the works against which its measurements should be read.

The project's scaling study covers 70+ runs across seven RL libraries and five model families. This thesis uses one model range throughout: 0.6B–1T, with the anchors above 235B single-seed and descriptive. The rule is that the range spans every model with at least one completed run in the P1 roster. The source documents state narrower ranges because each covers a subset: 0.6B–~671B in the P2, P3 and P4 introductions, and 0.6B–235B for the multi-family data in the related-work source. The principal empirical result of the scaling work is a null: across that range, no reliable scaling law is recovered from reward curves. The companion group-size study adds a second bounded negative: a three-seed sweep does not establish an optimum, since the measured arms are statistically indistinguishable, and the measured signal-to-noise ratio grows at only about 52% of the $\sqrt{G}$ ideal, with $G \in \{2, 4, 8, 16\}$ measured and $G \in \{4, 8, 16, 32, 64\}$ explicitly reconstructed rather than run.

Layer adaptation supplies the second half of this section's context, and connects the project's white-box investigation to the parameter-efficient fine-tuning literature. LoRA [47] freezes the pretrained weights and injects trainable low-rank matrices into the attention projections, so that a $d \times d$ projection at $d = 4096$ with rank $r = 16$ trains $2dr$ rather than d^2 parameters, a 128× reduction (this chapter's arithmetic; the paper itself reports up to 10,000× fewer trainable parameters for GPT-3 175B). QLoRA [74] extends this by quantising the frozen base to NF4 and adding double quantisation, which saves

about 0.37 bits per parameter — approximately 3 GB for a 65B model — and permits 65B fine-tuning on a single 48 GB GPU. The motivating arithmetic is that Adam at mixed precision costs roughly 16N bytes, exceeding 100 GB for a 7B model. Prefix tuning, prompt tuning, and adapter layers are the earlier members of the same family, and LoRA's advantages for RL specifically are that the frozen base doubles as the reference policy and that the trainable parameter count is small enough for modest hardware. The project's layer-adaptation pillar asks a narrower and orthogonal question: where inside the network GRPO-style adaptation concentrates, and whether the layers that will matter can be identified early enough to freeze the rest. The reported finding is moderate concentration of per-layer adaptation, with the important negative that step-1 predictability does *not* survive scaling. This connects directly to Mukherjee et al. [75], who found that RL fine-tuning updates only 5–30% of model parameters across seven algorithms and ten model families, suggesting that RL activates a sparse subnetwork. The length-bias pillar completes the scaling picture with its own bounded null: under a 200-token GSM8K generation cap, GRPO and Dr. GRPO produce held-out gains that are indistinguishable at the project's seed budget, and neither arm shows length inflation; the source is careful to state that the 200-token cap is part of the estimand rather than a nuisance detail, so the null bounds the capped, short-horizon regime and cannot adjudicate uncapped reasoning or long agent trajectories.

2.6 Process-, Tree- and Stability-Aware Variants

Beyond the group-baseline fixes, a parallel line of work changes *what* signal drives the update. Process reward models supply denser, step-level feedback instead of a single terminal reward, which reduces the chance that a whole group collapses to identical terminal rewards. Let's Verify Step by Step [51] showed that step-level PRMs substantially outperform outcome reward models on MATH; Math-Shepherd [76] derives process rewards from automatically generated process annotations, avoiding costly human labels; PRM800K [51] and PRMBench [77] supply step-level evaluation data; OmegaPRM [78] uses Monte-Carlo tree search to supervise process rewards without human-in-the-loop; ReasonEval [79] scores reasoning steps for validity and redundancy with trained LLM evaluators; and Implicit PRM [80] learns process rewards implicitly from outcome labels, with VersaPRM [81] extending process rewards to multi-domain tasks. Tree-of-thought search [82], self-consistency [83], and critic-style post-hoc verifiers all either benefit from or substitute for process supervision. The same source documents the counter-current that matters most here: "A Sober Look" [64] warns that reward hacking and evaluation artefacts can inflate perceived gains on reasoning benchmarks, which is the project's stated motivation for insisting on binary verifiable rewards in its own

mathematics work.

Stability-aware variants constrain the update itself. GSPO's sequence-level importance ratio, discussed above, is the clearest instance, credited with stabilising the Qwen3 mixture-of-experts series. SSPO's subsentence-granularity objective is explicitly framed as balancing GSPO's stability against token-level GRPO's expressiveness. Entropy-guided advantage shaping in RL-ZVP regulates the update when the group carries no reward contrast, and GRESO's pre-screening is a sampling-side stability control. On the reasoning-RL side, GRPO-Lead [84] and LCPO [85] tune reasoning length through length-aware rewards, LIMR [86] selects a small high-impact subset of RL training data, Search-R1 [87] trains reasoning agents to interleave search with chain-of-thought, and TTRL [88] performs test-time RL on unlabelled data using majority-vote rewards.

The Phase-1 survey's judgement on this body of work is retained without amendment, because the Semester 4 evidence has not changed it. These methods propose *levers*; this project first builds the *instrumentation* needed to tell whether any such lever converts wasted rollouts into held-out accuracy — ZVF, group utilisation, pairwise-contrast density, and the collapse decomposition. The nulls reported in the results chapters are exactly the kind of evidence that instrumentation is designed to produce, and they constitute a standing caution against adopting a variant on the strength of a single-seed improvement. The project applies that caution to its own proposals: the adaptive group-size controller is described as an implemented policy rather than an established improvement, and its decisive matched-token comparison remains unrun.

2.7 Positioning the Portfolio

The portfolio's positioning against prior art is a per-pillar statement of what is claimed and, more importantly, what is not. Table 2.1 reproduces the Phase-1 positioning and updates it with the Semester 4 evidence (Figure 2.2).

Positioning of the P1–P8 studies against closest prior art.

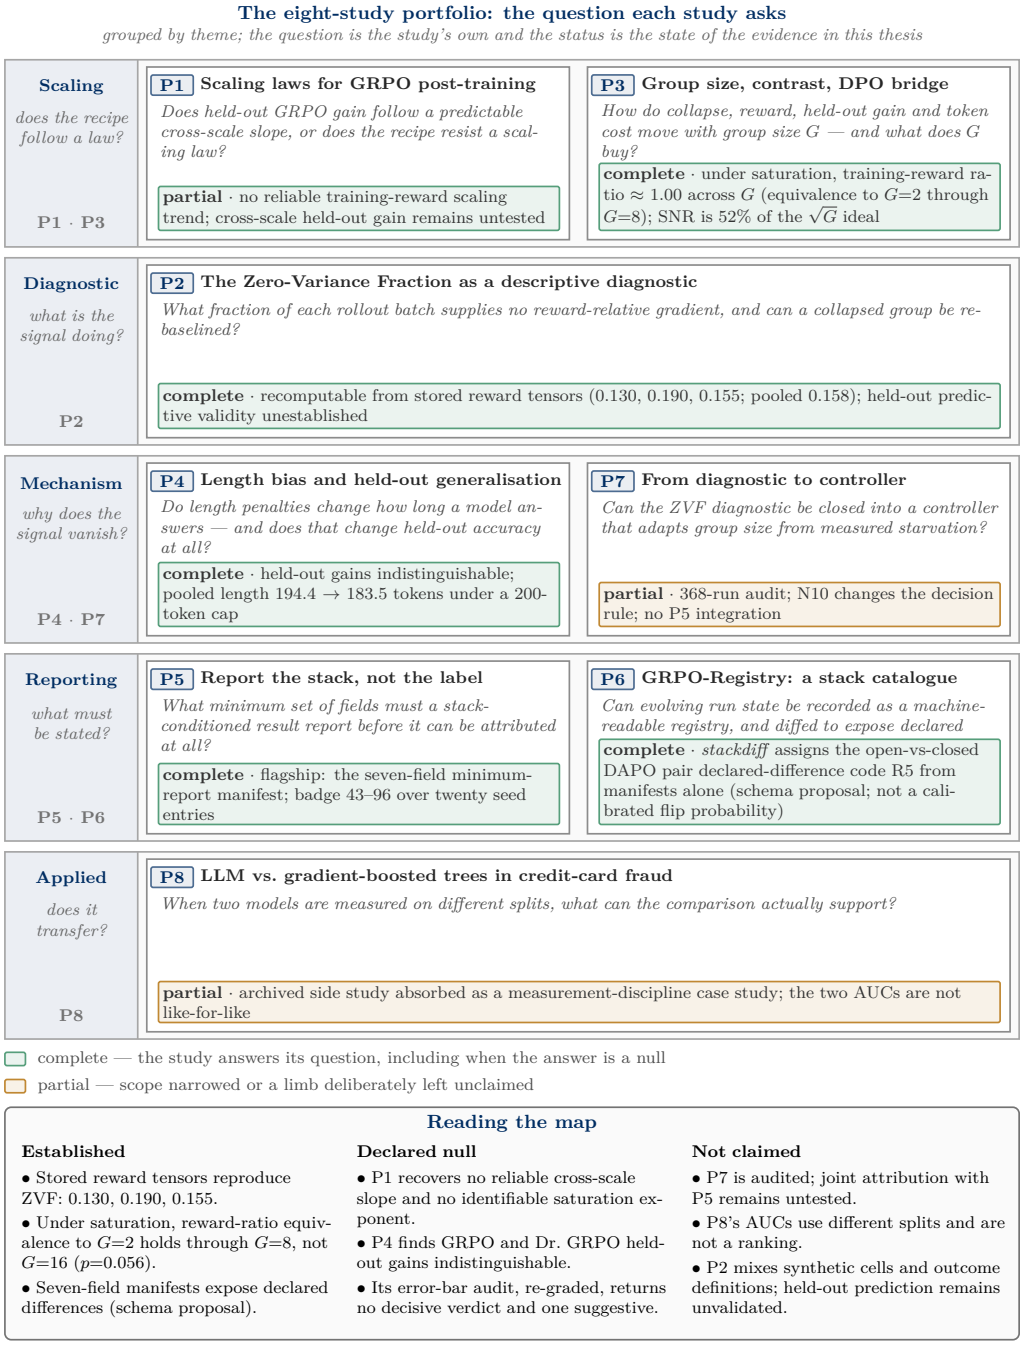


Figure 2.2: The eight studies P1–P8 grouped by theme, with the question each one addresses and the state of its evidence. Every question is answered from the repository's own record; two of the eight answer with a declared null, and a study whose scope narrowed between the group semester and this one is marked partial rather than complete.

Table 2.1: Positioning of the eight portfolio studies (P1–P8) against closest prior art and the narrowed axis each claims.

Pillar	Closest prior art	Narrowed axis claimed
P1 (scaling)	whole-model scaling and saturation laws; Mukherjee et al. [75] on sparse RL subnetworks	Per-layer adaptation is moderately concentrated; step-1 predictability does not survive scaling; no reliable reward-curve scaling law recovered
P2 (ZVF)	DAPO dynamic sampling, GVPO, AERO, RL-ZVP, GRESO, CPPO, NGRPO	*Measure* ZVF as an existence statistic; show it is entangled with accuracy and group size; propose PCD as the magnitude-aware replacement
P3 (group size)	integer-G sweeps; MC-GRPO; Tan et al. [72] budget-knob treatment	Observed accuracy point estimates are non-monotone in G; a three-seed sweep detects no difference between arms and does not establish either non-monotonic trainability or an optimum; measured SNR grows at ~52% of the $\sqrt{G}$ ideal
P4 (length bias)	Dr. GRPO and λ-GRPO length fixes	A bounded null: under a 200-token cap, GRPO and Dr. GRPO held-out gains are indistinguishable with no length inflation

Pillar	Closest prior art	Narrowed axis claimed
P5 (reporting standard)	Datasheets, Model Cards, Data Statements, Data Cards	An eight-item RL-run reporting standard (seven manifest fields and one evaluation item) targeting the stack rather than the label
P6 (registry)	static run-config registries; HELM; LM Evaluation Harness; Papers with Code	Machine-readable stack records with per-component implementation status and an unauditability marker
P7 (controller)	adaptive training-signal control (G^2RPO-A adaptive guidance [36]); DAPO dynamic sampling	Closed-form $h_G(p)$ prediction of ZVF, with a controller described as implemented, not established
P8 (fraud study)	tuned gradient-boosted trees as the tabular fraud-detection baseline	A measurement-discipline side study comparing a fine-tuned LLM with a gradient-boosted tree on synthetic credit-card fraud, with no RL claim (Appendix F); P8 was archived and absorbed into the portfolio

The two crowded pillars are P2 and P4, where the literature is dense and the project accordingly narrows its claim to measurement rather than to a new algorithm. The widest open ground remains the systems and reporting side, where the bounded search in Section 2.4 did not identify an equivalent GRPO-specific machine-readable reporting standard. The surveyed resources differ in three relevant ways: HELM's unit is the (model, scenario) cell rather than the training stack, the LM Evaluation Harness standardises evaluation by executing code while the registry must describe stacks it cannot execute, and Papers with Code stopped at the repository boundary and was discontinued in July 2025.

The Semester 4 evaluation campaign extends this positioning from method comparison to benchmark practice. Rather than adding one more leaderboard number, it evaluates a

single trained actor against fourteen agentic and reasoning suites absent from its recorded training-suite list, each through its own native grader at a pinned revision, under receipt and budget controls. Content-level decontamination remains unverified. The campaign retains these limits, and it reports every lane's terminal state rather than a cross-suite aggregate. Its results are in Chapter 8; Table C.3 gives each lane's scope and status. One finding bears directly on the benchmark-practice literature: E4's zero-scoring run used a serving bridge that passed no stop sequences (Section 8.5). The defect is a plausible mechanism, but its contribution to the mean reward of 0.0 across 100 base-model trials remains unquantified, which is exactly the kind of unreported stack detail this positioning argues must be recorded.

Two gaps in this survey should be stated plainly, since the chapter's purpose is to locate the work rather than to flatter it. First, the primary papers for the fourteen evaluation suites are not surveyed here at the depth the algorithmic literature receives; the suites are discussed as instruments, sourced to the campaign's own results document, and their native protocols are documented in Chapter 8 and its receipt trail rather than in this chapter. Second, the survey's treatment of tool-use and agentic RL is inherited from the project's own related-work source and is explicitly flagged there as a concurrent setting in which the ZVF measurements will need to be re-evaluated rather than assumed to transfer. What the chapter does establish is that the project's contribution is a measurement and reporting contribution, that the literature it sits in is dense enough that claim-narrowing rather than claim-extension is the appropriate move, and that the specific gap the portfolio occupies — machine-readable, per-component, executed-loss-form disclosure for group-relative RL runs — is not filled by any of the resources surveyed above.

Chapter 3

System Requirements Specification

This chapter states what the Tinker RL Lab system must do, what qualities it must hold while doing it, and how each requirement is verified. It inherits the specification of the Phase-1 report and extends it across the Semester-4 additions: the multi-framework benchmark rosters, the Zero-Variance Fraction (ZVF) diagnostic and the adaptive group-size controller derived from it, the minimum reporting standard and the machine-readable GRPO stack registry, and the E1–E14 evaluation campaign with its fail-closed completion gate. It is written as a specification rather than as a retrospective description, but every requirement below corresponds to a component that exists in the repository, and every functional requirement is paired with the concrete test that checks it. These are design requirements, not a claim that every historical run satisfies them. Incomplete framework parity is recorded in §3.2 and §3.8; per-run provenance and loss-form gaps are recorded in Table 4.2. The former cloud-capacity blockers are historical limitations (§3.6), while the white-box gradient requirement is explicitly restricted to models whose internals are exposed.

3.1 Overview and Actors

The central object of the Phase-1 specification was the **run**: one configuration, one seed, one framework, one training budget, producing per-step telemetry and a persisted set of raw group reward tensors. Semester 4 introduces two further first-class objects. The first is the **lane**: a single benchmark suite evaluated under a named scope — an original contract with the suite's owner, or a declared replacement scope — carrying its own provider, payload, licence, quota and terminal state. The second is the **receipt**: a hash-bound record of a claimed step, its declared inputs and revision. A matching hash establishes byte identity; establishing that the step occurred also requires trusted provenance and execution evidence. Requirements that concern runs, lanes and receipts

are distinguished below where the distinction matters.

Four actors interact with the system, and the fourth is new in Semester 4.

The experimenter declares work. Under the original design this meant declaring a run through a single configuration object and nothing else: the model, the dataset, the reward function, the decoding parameters (temperature, top-p, maximum tokens), the group size G, the learning rate, the KL coefficient β and the seed all live in one file, and the framework is a switch rather than a rewrite. Under the campaign design the same actor declares a lane through a sealed resource request: the lane specification fixes an immutable task bundle, a pinned native runtime, a native grader, a budget and an applicable licence in advance, and those declared inputs are then checked for internal consistency before any launch is permitted.

The back-end executes the training loop and, under the managed path, is the Tinker service; under the white-box path it is a local or rented GPU. For evaluation, the corresponding actor is the **provider grader**: the benchmark owner's own native evaluator at a pinned revision. The system is permitted to record a suite score only when that evaluator produced it, or when a declared replacement harness reproduces it under a scope that is labelled as a replacement.

The auditor is a downstream script or an independent reader who recomputes published diagnostics from stored raw artefacts. In Semester 4 this role acquires force: the audit suite of §3.4 is executed as a gate with a non-zero exit status rather than as advisory tooling, and the completion gate for the campaign lanes is fail-closed by construction, in that a missing or malformed declaration stops the procedure instead of degrading it.

The campaign operator holds launch authority for paid work. Spend on any lane requires a bound authorization receipt issued by the operator; the system will not mint one for itself, and lanes are recorded as blocked when the receipt or the technical chain behind it is absent.

A fifth party, the **external access holder**, is an actor only in the negative sense: several lanes depend on a private payload, a hosted evaluation service or a quota grant that only the provider can issue. The specification requires that such a lane be recorded with an explicit terminal state and a named reopen condition rather than silently dropped, which is why the campaign's terminal-state vocabulary exists as a first-class output.

3.2 Functional Requirements

Table 3.1 lists the functional requirements. Each row states the requirement and names the source that defines it; §3.5 maps each to the artefact that implements it and the test

that verifies it.

Functional requirements.

Table 3.1: Functional requirements. Sources: the Phase-1 report is `platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex`; other files are under `platform_hybrid/`, `platform_local/` or `zvf-program/flags hip/`.

ID	Requirement	Source
FR-1	One declarative file fully determines a run (model, dataset, reward, decoding, G, learning rate, KL coefficient, seed, output); no framework-specific parameters are needed on any supported back-end	Phase-1 report

ID	Requirement	Source
FR-2	A configuration is executable on multiple frameworks through thin adapters that share the reward grader and decoding configuration. Two rosters are in scope and are kept apart: the cross-RL-library roster (TRL, Stable-Baselines3, CleanRL, Tianshou, PufferLib, rl_games, d3rlpy) and the cross-launcher LLM-RL roster (Tinker, TRL, SkyRL, veRL, OpenRLHF, Atropos, HF reference launchers). Completed-run parity is **not** met: only Tinker and TRL produced completed runs; the veRL and OpenRLHF entries are dry-run placeholders	`_shared_methods.tex`; `framework_comparison.json`
FR-3	Every step computes ZVF and its all-correct / all-wrong decomposition from the reward tensors	Phase-1 report

ID	Requirement	Source
FR-4	Every step emits a structured telemetry record (reward, ZVF, gradient utilisation, collapse counts, entropy, completion length, KL) to a log and to the tracker; the controller work adds a per-step counterfactual against a matched fixed-G control	Phase-1 report; `controller_cf_per_step.tsv`
FR-5	Raw per-group reward tensors are persisted for every run, so diagnostics can be recomputed	Phase-1 report
FR-6	Sweeps over G, seed and baseline-versus-intervention arms run under a fixed wall-clock or token budget	Phase-1 report
FR-7	For single-GPU models, per-layer LoRA gradient norms are recorded; not required at managed scale, where they are not exposed	Phase-1 report
FR-8	Every run emits a provenance record binding configuration, grader version and rollout hashes; a campaign lane additionally declares its provider package and grant documents against published schema versions, each with a 64-character hash	Phase-1 report; `e1_e14_completion_gate.py`

ID	Requirement	Source
FR-9	A stack-conditioned result carries the seven manifest fields of the eight-item standard (loss form, reference KL, sampler/backend with base-checkpoint revision and hash, telemetry, group-size schedule, held-out split, decontamination) plus its eighth, evaluation item (held-out pass@k); a 0–100 badge is emitted, and an unreported field is distinguished from one reported as absent	`paper_P6_registry.tex`; `minreport_audit_summary.json`
FR-10	The stack registry is queryable by stack, field or status	`registry/schema.json`; `registry/query.py`
FR-11	Each named variant stores an explicit delta against the GRPO reference, and `stackdiff` returns an R0–R5 declared-difference code (formerly "flip-risk verdict", renamed 19 October 2026; not a calibrated label-flip probability) for same-label entries	`paper_P6_registry.tex`; `registry/provenance/`

ID	Requirement	Source
FR-12	An adaptive group-size controller with escalation asymmetry and hysteresis records its counterfactual against the best static recipe at matched and unequal rollout counts; it measures the trade and does not claim a win	`paper_P7_zvf_controller.tex`; `controller_cf_summary.json`
FR-13	Each lane records results against a declared evidence class (exact complete, partial exact, partial recovery, externally blocked, local-setup-ready-provider-input-required) tied to the source status	`e1_e14_completion_gate.py`
FR-14	The completion gate validates, and never executes, a lane package; a valid package proves only that its inputs are consistent and available; signatures are checked against provider trust roots, and the gate refuses rather than warns	`e1_e14_completion_gate.py`
FR-15	Original-contract and replacement-scope results are never pooled, no cross-suite aggregate is computed, and every accuracy carries its denominator	`E1_E14_FINAL_RESULTS_2026-09-19.md`

ID	Requirement	Source
FR-16	The export path builds an anonymised review package whose build runs the audit suite, and refuses a package built with audits skipped	`run_all_audits.py`; `export_guard_audit.py`

3.3 Non-Functional Requirements

Non-functional requirements.

Table 3.2: Non-functional requirements.

ID	Requirement	Source
NFR-1 Attribution	Comparative claims hold the stack fixed except the factor under test; confounded factors are reported as confounded	`_shared_methods.tex`
NFR-2 Reproducibility	Multi-arm claims rest on at least three seeds; single-seed results are descriptive only	Phase-1 report
NFR-3 Recomputability	Every derived diagnostic is reproducible from stored raw artefacts, independent of logged summaries	Phase-1 report
NFR-4 Denominator discipline	Held-out figures carry their n; negative, null and underpowered results are reported as such	`main_eai_body.tex`

ID	Requirement	Source
NFR-5 Isolation	Concurrent experiments run in separate processes, not threads (after the tracker thread-safety defect)	Phase-1 report
NFR-6 Budget	Spend is recorded per run against a declared envelope; per-run bounds and lead-issued authorisation receipts apply even under an unlimited total	`Pending_Experiments.md`
NFR-7 Fail-closed	Validation defaults to refusal; an unverifiable package is not scored	`e1_e14_completion_gate.py`
NFR-8 Least privilege	Evidence records hold no key material; credential checks record only liveness and scope	`Pending_Experiments.md`
NFR-9 Lost-source auditability	Execution sources for sealed artefacts live in tracked paths; sealed requests and receipts suffice to pin a faithful re-implementation	`E1_E14_FINAL_RESULTS_2026-09-19.md`
NFR-10 External traceability	External payloads are bound by hash and validated against trust roots and schema versions; an unreported field is null, not zero or false	`e1_e14_completion_gate.py`; `paper_P6_registry.tex`

3.4 Test-Case Specification

The test cases below specify checks attached to the requirements. A test specification or source-code inspection is not an execution receipt, and a structural audit pass does not independently establish a numerical or scientific claim. The traceability matrix names the intended verification route; dated result evidence and remaining source limitations appear in the results chapters and Appendix B. TC-1 through TC-5 are inherited from the Phase-1 specification and are restated here because later chapters depend on them; TC-6 onward are the Semester-4 additions, and TC-6 is the suite that carries the largest share of the functional requirements.

TC-1 — Recompute ZVF and the collapse decomposition from stored tensors. Recompute the published ZVF and collapse figures from the persisted per-group reward tensors of the main configuration, using the documented analysis script. The published values are a ZVF of approximately 0.72–0.77 and an all-correct fraction of 0.65–0.71; recomputation must match. Verifies FR-3 and FR-5.

TC-2 — Recompute the detector metric from raw tensors. Recompute the Phase-3 detector's area under the ROC curve from raw tensors under five-fold stratified cross-validation. The published figure is an AUROC of 0.84 ± 0.01 against 0.43 for the reward-only comparator. Verifies FR-5 and NFR-3.

TC-3 — Re-run a matched-budget arm comparison. Re-run the baseline and the curriculum arm at a matched token budget over three seeds; the Phase-1 result is that both arms average +0.028 on the held-out set with no curriculum advantage. Verifies FR-1, FR-2 and FR-6.

TC-4 — Recompute headline diagnostics. Recompute each headline diagnostic quoted in a results chapter directly from stored artefacts, with the recomputation recorded next to the published value. Verifies NFR-3.

TC-5 — Provenance verification. Verify a run's provenance record end to end, from configuration to rollout hashes to the grader version. Verifies FR-8.

TC-6 — Execute the submission audit suite as a gate. Run `python platform_local/run_all_audits.py`. The suite executes nine audits — `claim_issues`, `sync_issues`, `anon_issues`, `strength_issues`, `package_issues`, `workflow_issues`, `export_guard_issues`, `caveat_issues` and `scientific_issues` — emits one `METRIC <name>=<count>` line per audit, and returns exit status 0 only when every audit reports zero issues. Individual checks that this test enforces include the presence of scope and caveat language in the review documents (`readme_missing_key_results_scope_header`, `readme_missing_heldout_language`, `checklist_missing_preliminary_key_results_label`), the absence of

overstated checkpoint claims (`misleading_checkpoint_availability_claim`, `submission_overstates_checkpoint_release`), the presence of every reviewer caveat (`heldout_scope`, `tool_eval_protocol`, `codegen_subset`, `capacity_confound`, `moe_diagnostics`, `budget_and_splits`, `replication_release`), the absence of banned marketing formulations, the survival of the technical caveats into the anonymous build (`anonymous_missing:<label>` for the seven needles), and the presence of the audit call and its skip flag in the export script. Verifies FR-16, NFR-4 and NFR-7.

TC-7 — Structural checks on the evaluation script and its result files. For each held-out evaluation script, assert by parsing the source — not by reading its documentation — that it exposes a seed argument, locks the dataset split to the test split, samples with a non-zero temperature, consumes a checkpoint path, and writes the declared metadata keys including the split, the sampling flag, the seed and the model source. For each result file, assert that the schema version is 2, that the evaluation status is one of completed or failed, that the required configuration and summary fields are present, that the recorded split is the test split, that the attempted count equals the sum of correct and incorrect, and that a failed evaluation carries a failure reason and a completed evaluation carries non-zero attempts. Verifies FR-8 and NFR-4.

TC-8 — Build the report from source. Compile the main report and its supplementary through the full LaTeX chain and flag an empty journal field in the bibliography. Verifies FR-16.

TC-9 — Dry-run the completion gate against a declared lane. Present a provider package to the gate and require it to validate the declaration without executing anything: the expected outcomes are acceptance with the declared evidence class, or a specific refusal naming the missing element. A package must never be reported as a benchmark result by this procedure. Verifies FR-13, FR-14 and NFR-7.

TC-10 — Registry query and null discipline. Query the registry for a labelled entry and its delta record, and confirm that a field absent from the source is returned as unreported rather than as a zero value, and that a same-label pair with differing scored fields triggers the implemented risk verdict while unscored differences remain visible. Verifies FR-9, FR-10, FR-11 and NFR-10.

3.5 Requirements Traceability Matrix

Requirements traceability matrix.

Table 3.3: Requirements traceability matrix: each functional requirement mapped to the artefacts that implement it and the audit check that verifies it.

Requirement	Implemented in	Verified by
FR-1 Configuration object	`platform_local/unified/launcher.py`; run configurations under `platform_hybrid/experiments/`	TC-3
FR-2 Back-end-agnostic execution	`platform_local/trl_integrations/`; `platform_hybrid/experiments/results/framework_comparison.json`	TC-3; parity shortfall recorded in §3.2
FR-3 Per-step ZVF	Training-loop telemetry (Phase-1 design)	TC-1
FR-4 Per-step telemetry	Telemetry writer; `platform_hybrid/experiments/results/p5p8/controller_cf_per_step.tsv`	TC-1, TC-4
FR-5 Raw tensor persistence	Persisted per-group reward tensors	TC-1, TC-2
FR-6 Sweeps	Sweep runner	TC-3
FR-7 White-box gradients	Single-GPU training path	Not automatable in the audit suite; checks in Chapter 5 §5.5 (per-layer gradient profile)
FR-8 Provenance record	`zvf-program/flagship/e1_e14_completion_gate.py`; run provenance records	TC-5, TC-7, TC-9
FR-9 Minimum-report manifest	`platform_hybrid/experiments/results/p5p8/minreport_audit_summary.json`	TC-10

Requirement	Implemented in	Verified by
FR-10 Registry query	`platform_hybrid/registry/schema.json`, `query.py`, `entries/`	TC-10
FR-11 Variant deltas, stack-diff	`platform_hybrid/registry/provenance/`	TC-10
FR-12 Adaptive controller	`platform_hybrid/experiments/results/p5p8/controller_cf_summary.json`	TC-4
FR-13 Lane harness	`zvf-program/e1_wave10/`, `zvf-program/e5_successor27/`, `zvf-program/e2_core/`, `zvf-program/e13_balrog/`, `zvf-program/e6e9/check_quota_status.py`; runners actually used on 2026-09-27: `outputs/finish_pending_2026-09-27/<lane>/code/`	TC-9
FR-14 Completion gate	`zvf-program/flagship/e1_e14_completion_gate.py`	TC-9
FR-15 Scope separation	`outputs/E1_E14_FINAL_RESULTS_2026-09-19.md`	TC-6, TC-9
FR-16 Blind-review packaging	`platform_local/run_all_audits.py`, `export_guard_audit.py`	TC-6, TC-8
NFR-1 Attribution	Method sections and comparison artefacts	TC-3, TC-10
NFR-2 Reproducibility	Seed management in the runner	TC-3
NFR-3 Recomputability	Documented analysis procedures	TC-1, TC-2, TC-4
NFR-4 Denominator discipline	Caveat and claim-strength checks	TC-6, TC-7

Requirement	Implemented in	Verified by
NFR-5 Isolation	Process-level execution	Operationally checked; not in the audit suite
NFR-6 Budget	Spend receipts	TC-9
NFR-7 Fail-closed behaviour	Gate constants and suite exit status	TC-6, TC-9
NFR-8 Least privilege	Credential-gate receipts	TC-9
NFR-9 Auditability	Tracked execution paths	TC-9
NFR-10 External traceability	Hash equality and trust-root validation	TC-9, TC-10

Two rows deserve comment. FR-7 has no automated check because the white-box gradient path is a measurement procedure rather than an invariant; its evidence is the result data itself. NFR-5 is likewise checked operationally rather than by the suite, because process isolation is a property of how runs are launched and is not visible in any post-hoc artefact.

3.6 Hardware Requirements

Hardware requirements and their status.

Table 3.4: Hardware requirements and their status.

Compute surface	Requirement	Status
Managed training back-end (Tinker)	Sampling, training and checkpointing for the ~35B-total, ~3B-active MoE actor in bfloat16 with a pinned LoRA; per-layer gradients are not exposed, which is why FR-7 is scoped to small models	Met

Compute surface	Requirement	Status
White-box GPU	One CUDA device with at least 24 GB (an L4-class cloud notebook), enough for the 1.5B configuration and a reduced-length 3B re-test	Met
Serverless GPU (Modal)	Large scoring sweeps and the hosted sampler bridge; the bridge is a precondition for the lanes that use it	Met
Evaluation-lane cloud capacity	Some native environments exceeded available execution capacity; hosted environments and a runtime adapter were needed	Historical infrastructure limitation
Orchestration workstation	Orchestration, analysis, figures, the audit suite and the report toolchain	Met

Sources: outputs/E1_E14_FINAL_RESULTS_2026-09-19.md; platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex; withheld historical operational chronology; withheld historical campaign chronology; outputs/PES_Phase2_Review_2026-09-12/finish/e9_completion/status_2026-09-19.json.

3.7 Software Requirements

The historical Phase-1 specification names Python 3.11 with PyTorch and the Hugging Face stack (Transformers, PEFT, Datasets) for model handling, tokenisation and adapters; the RL back-ends are TRL, veRL through its HybridFlow path, and OpenRLHF, driven through the shared launcher, with the Tinker client SDK for the managed path. Experiment tracking is a weights-and-biases project; telemetry is stored as JSONL and as persisted tensors; analysis is carried out by the documented scripts named in the Phase-1 specification.

Semester 4 adds five software components to the requirement set. First, the audit suite:

`platform_local/run_all_audits.py` together with the nine audit modules it imports and the shared data model in `utils/audit_utils.py`, which defines the issue, result and suite types and the `METRIC` line format; the suite requires a Python interpreter with no third-party dependencies beyond the standard library for its structural checks. Second, the completion gate and the per-lane harnesses under `zvf-program/`, which require Ed25519 signature verification and JSON Schema validation against the published provider-package, provider-grant and trust-root schema versions. Third, the registry: a schema, an entry store and a query interface, together with the provenance records under `platform_hybrid/registry/`. Fourth, the report toolchain: a LaTeX distribution capable of the multi-pass build with BibTeX, plus a markdown assembler that concatenates the chapter files and, when available, renders the document through pandoc. Fifth, the judgement-layer harness under `zvf-program/jev_lab/`, which records its own receipts and is used only for classification, faithfulness checking and value ordering.

3.8 Constraints and Assumptions

Rewards are binary and verifiable. The specification assumes a programmatic checker — exact match for the mathematics tasks and unit tests for the code subset. Nothing in the requirement set addresses learned reward models, and none of the diagnostics should be read as applying to them.

Held-out sets are small. Several Phase-1 evaluation sets have n between 8 and 20, and the controlled Semester-4 comparisons use 200 to 500 items (Table 1.1 gives the n behind each headline), with the consequence that learning-gain magnitudes are noise-limited by construction. This is a constraint on what the results can mean, not a defect of the analysis: the small-n figures are reported with their denominators and are not used to support comparative claims.

The managed back-end is a black box at the layer level. Per-layer gradients are not exposed on the managed path, so claims about the relationship between reward spread and gradient magnitude are confined to the small-model white-box configuration and are directional only.

Prompt exposure and response sampling are separate controls. A shared deterministic prompt schedule is a design requirement, not a property of every executed comparison. The primary arithmetic group-size sweep holds 16 prompts per step fixed, while its number of sampled completions changes with G. The original PPO/GRPO comparison consumes different prompt streams and evaluates mostly different items with unequal train–evaluation overlap (§6.2.3); the later GSM8K comparison fixes 64 generations but uses 8, 32 or 64 prompts per step (§6.5.5). Even a matched prompt schedule does not

remove response-sampling noise or establish that a ZVF difference is caused by training dynamics. These controls and exceptions must accompany each contrast.

Framework parity is incomplete. The requirement in FR-2 covers two seven-library rosters, but only two of the seven cross-launcher entries produced completed runs in this release, and the remaining comparison entries are dry-run placeholders. Comparative framework claims are therefore constrained to the rosters and the completed runs actually recorded, and the repository states the dry-run status explicitly.

The scale study reports descriptive limits rather than a scaling law. The cross-scale analysis spans more than seventy runs across seven libraries and five model families, and its central result is a negative one: no reliable positive cross-scale slope is recovered and no saturation exponent is identifiable. The specification inherits that boundary — the requirement is to report identifiability limits, not to assert a law.

External dependencies are assumed unavailable until proven otherwise. Payload grants, hosted evaluations and quota increases are treated as absent until a response arrives; a lane without the required external benchmark scope is closed as externally blocked with a reopen condition rather than left pending indefinitely.

Arithmetic and string lookups stay in code. Whatever judgement layer is used for triage, classification or value ordering, verification-type checks are performed by deterministic code. This rule was banked after the judgement layer returned an incorrect answer to a parity probe in a healthy window, and it constrains the architecture: no requirement in this chapter may be verified by a language model where a deterministic check is possible.

Named variants are labels, not specifications. The assumption that a method name identifies a method is false on the available evidence: entries sharing a label diverge substantially in measured behaviour, which is why the registry's delta records and declared-difference codes (formerly "flip-risk verdicts") are specified as requirements rather than as documentation niceties.

Part II

Design and Implementation

Chapter 4

Proposed Methodology

This chapter sets out the methodology of the work rather than its results. It presents, in order: the design commitment to attribution and the four de-confound pillars that operationalise it (§4.1); the per-step telemetry that makes a run's internal state observable at the granularity at which the mechanism acts (§4.2); the formalisation of the Zero-Variance Fraction as a descriptive diagnostic rather than a metric (§4.3); the eight-study portfolio P1–P8 and the question each study asks (§4.4); and the design of the E1–E14 evaluation campaign, including its single trained actor, pinned native evaluators, frozen sampling, receipt model, terminal-state taxonomy and decontamination handling (§4.5). Throughout, the reporting discipline is part of the method: figures are tied to named evidence, unavailable primary artefacts are distinguished from surviving summaries (Appendix B §B.11), and lanes without an admissible result are recorded as blocked (Figure 4.1).

4.1 The Design Commitment to Attribution

The premise of the project is that an RL-for-LLM result is not identified by the name of its algorithm. Two runs both labelled GRPO may differ in loss form, reference-policy handling, sampler, precision, base-checkpoint identity, data order and group-size schedule, and the label alone does not say which of those differences produced the outcome. The project's response is a design commitment rather than a post-hoc covariate adjustment: hold the experimental stack fixed except the intended contrast, then disclose any coupled changes that prevent attribution to that factor alone. This commitment is the methodological spine of the whole thesis, and it has a practical corollary that shapes every experiment reported later: a study is defined by the single axis it varies and is only interpretable to the extent that every other axis was genuinely pinned (Figure 4.2).

The commitment is implemented in a unified launcher, `platform_local/unified/la`

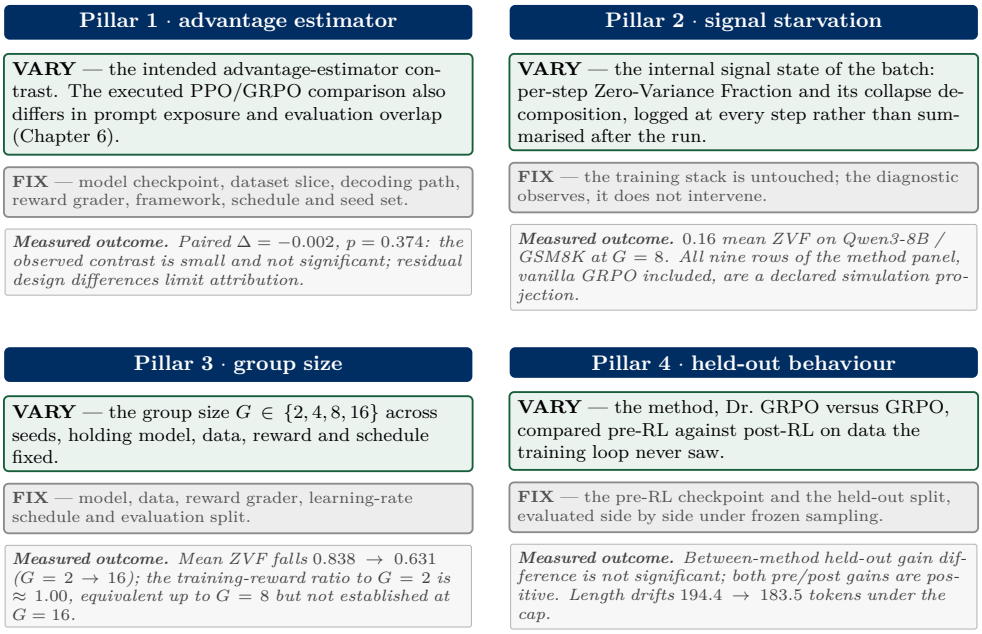


Figure 4.1: The four planned comparison pillars. The intended controls are shown here; departures in executed runs are stated with their results. In Pillar 2 all nine rows of the method panel, vanilla GRPO included, are a declared simulation projection (Chapter 6).

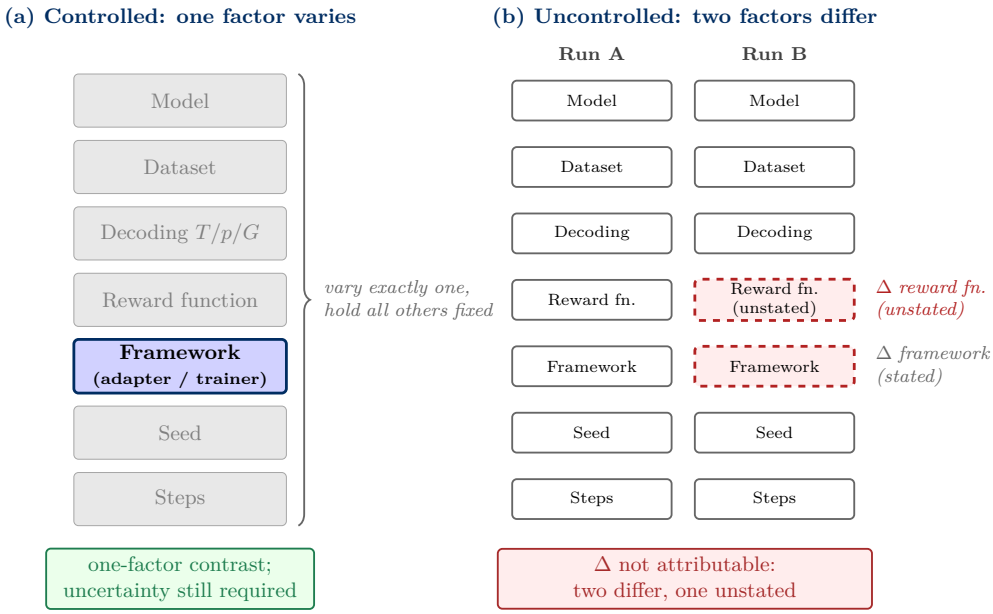


Figure 4.2: The target attribution design: vary one factor while holding the remaining stack fixed. Executed comparisons did not always meet that ideal: checkpoint identity, prompt exposure and other residual differences are disclosed with each result in Chapters 6 and 7.

uncher.py, which consumes a single configuration object and dispatches it to thin per-framework adapters — trl_integrations/, verl/, platform_modal/openrlhf/ and platform_hybrid/skyrl/, alongside the Tinker path in platform_tinker/tinkerrl/grpo.py. Atropos uses a separate integration rather than a cell in this dispatcher (§5.1). Shared grading and decoding configuration are intended controls. They are not sufficient to identify a framework effect: the executed framework comparison retains a Base-versus-Instruct checkpoint difference and unresolved managed settings (§5.2), and completed-run parity exists only for Tinker and TRL. That comparison therefore describes the recorded stacks, not an isolated causal effect of framework. The commitment also bounds what a result may claim. A completed run supports a statement about that stack, at that revision, with that grader; it does not license a statement about "GRPO" in the abstract, and the project's reporting standard (§4.4, P5) is built around that distinction.

Four pillars organise the commitment, with the actual controls and coupled changes stated for each contrast:

The four de-confound pillars.

Table 4.1: The four intended comparison pillars. The text and design column disclose coupled changes and limits; the table does not certify that every other factor was fixed.

Pillar	Factor isolated	Design
1 · PPO versus GRPO, same stack	Advantage estimator: group baseline versus learned value head	Same model, runner, clipped surrogate and step budget on a saturated 0.5B addition task; the arms also differ in prompts per step (16×8 versus 128)
2 · Zero-Variance Fraction	Signal starvation and its confounders	Per-step ZVF logged on every run; the nine-row method panel, vanilla GRPO row included, is a declared simulation projection (§6.3.2)
3 · Trainability and group size	Contrast density against the variance knob	$G \in \{2, 4, 8, 16\} \times$ seeds, held out
4 · Held-out generalisation	Whether GRPO adds real capability	Dr. GRPO versus GRPO, pre-to-post, McNemar

Pillar 1 asks whether a reported GRPO advantage survives when the advantage estimator is the main thing that changes. The comparison is designed on `Qwen/Qwen2.5-0.5B` two-digit addition over 40 steps and five seeds paired by seed, evaluated on 200 prompts per arm drawn fresh from the training generator rather than from a disjoint split (the two arms' item sets largely differ; §6.2.3), and the exact loss form of both arms is in Table 4.2. Because that task is near ceiling, the design can bound an estimator effect but cannot separate "no effect" from "no headroom"; the result is reported in Chapter 6 §6.2.3. The Qwen3-8B row in the project's own effect-size table is excluded from Pillar 1 as a provenance conflict and is not treated as an estimate. Pillar 2 turns a run's internal signal state into a first-class measurement; it is formalised in §4.3. Pillar 3 varies the group size G while holding model, data, reward and schedule fixed, and is the axis on which the preference-density argument of P3 rests. Pillar 4 asks the question the other three cannot answer — whether any of this changes held-out behaviour — by comparing a pre-RL checkpoint with its post-RL successor on data the training loop never saw.

The internal report sources have no single headline configuration: in the P8 workshop manifest every Tinker run uses LoRA with Adam ($\beta_1 = 0.9$, $\beta_2 = 0.95$), the Tinker case studies use rank 32 and learning rate 3×10^{-5} at seed 42, the frontier case studies use rank 16 and 1×10^{-5}, and only the TRL reference ({42, 123, 456, 789, 1024}) and the held-out control ({42, 137, 256, 512, 999}) are multi-seed. Configuration is not held fixed across the programme. The canonical dispatch matrix uses rank 16 and learning rate 1×10^{-6}, the stack probe uses 1×10^{-5}, the P4 scale extension uses rank 4, and the Tinker runners default to 3×10^{-5}; Table 4.2 lists the values each study actually used. The run manifest of that source lists 75 runs in 44 cells — 46 completed GRPO-style LLM runs on TRL and Tinker, one LLM PPO run, 15 classic-RL PPO reference runs and 13 failed, partial or never-started cells — and its completed GRPO cells cover eight model families (Qwen2.5, Qwen3, Qwen3.5, Llama-3.x, DeepSeek-V3.1, Nemotron, gpt-oss, Kimi-K2) from 0.5B to approximately 1T total parameters, at most 37B active; the P1 cross-scale roster spans 0.6B to 1T (Chapter 6 §6.1; source: platform_hybrid/paper/sections/p1_abstract.tex). The statistical apparatus is declared in the shared methods source but was not pre-registered (Chapter 9 §9.2; the analysis log records 206 iterations). It consists of Welch t-tests and Mann–Whitney U tests for two-sample contrasts; Cohen's d with Hedges–Olkin intervals; 95% bootstrap confidence intervals with 10,000 resamples; rliable aggregate metrics (interquartile mean, median and optimality gap); and Bonferroni and Benjamini–Hochberg corrections over a declared test family. Power was computed rather than assumed: at 80% power the minimum detectable effect for an equal-n comparison of five seeds against five is d_min = 2.024, improving to d_min = 1.530 when a five-seed group is compared against a pooled group of fifteen. Those figures are a standing reminder of how coarse a five-seed design

is, and the project reports several null results that are null precisely because the design could not have detected anything smaller.

Two limitations belong in this section rather than in a later discussion. First, the framework roster is broader than the framework evidence: although seven RL libraries are named in the study design, only Tinker and TRL produced completed runs, and the veRL and OpenRLHF entries in `framework_comparison.json` are dry-run placeholders rather than measurements. Cross-library claims are therefore narrower than the roster implies. Second, the variance decomposition that motivates the whole attribution commitment is itself four separate marginal one-way ANOVAs — library/framework, training algorithm, model family and model scale — each run against the same 42 experiments with valid performance observations. On a corpus where the factors are collinear a marginal η^2 absorbs the variance of each factor's correlates, so the design reads the decomposition only as evidence that framework and algorithm vary a great deal across this corpus, which is what motivates holding them fixed — not as an estimate of any factor's independent contribution, which a marginal one-way analysis on a non-orthogonal design cannot identify. The values are reported in Chapter 6 §6.1. The historical twenty-test multiple-comparison family that accompanies it pre-dates the Tier-A/B/C partition and is retained as a reproducibility audit trail, explicitly not as a corrected survival claim.

4.2 Per-Step Telemetry

Attribution is only as good as the run's observability. The intended per-step telemetry record contains the Zero-Variance Fraction; gradient utilisation; the collapse decomposition that separates all-correct from all-wrong zero-variance groups; and, alongside them, reward, loss, entropy, completion length and the KL divergence to the reference policy when one exists and that measurement is exposed; actual availability is runner-specific. Records are written to JSONL and mirrored to Weights & Biases, so a run can be analysed locally without a network dependency and reviewed remotely without a local environment. The reason ZVF and its decomposition are logged as separate fields rather than collapsed into a single starvation number is that the same aggregate fraction can describe opposite situations: a group of completions that are all correct and a group that are all wrong both contribute zero within-group variance, and the remedy for each is different. Logging the decomposition preserves that distinction at the point of collection instead of trying to recover it afterwards (Figure 4.3).

The quantity being logged is the group-relative advantage actually used by the runner:

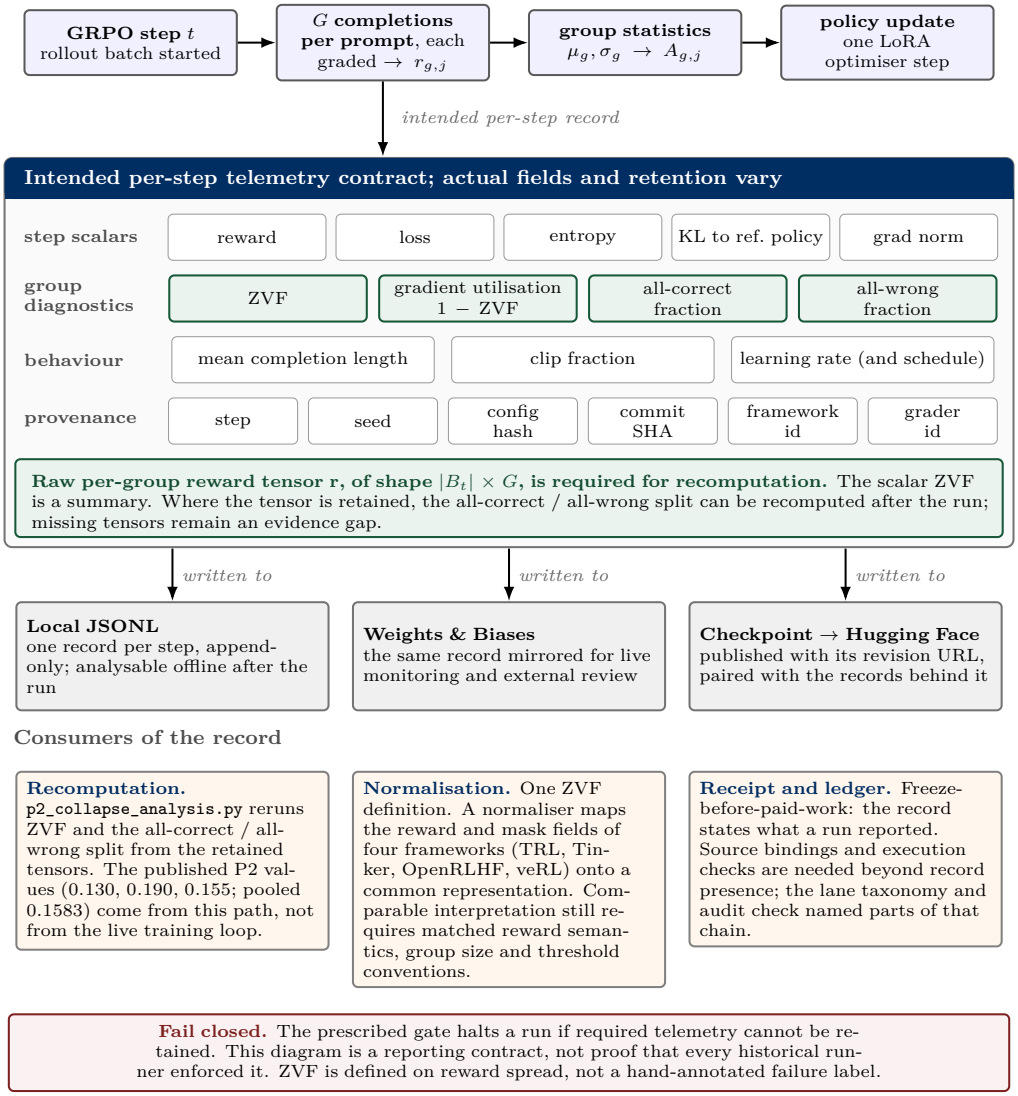


Figure 4.3: The intended per-step telemetry contract and the destinations each record flows to.

$$A_i = \frac{r_i - \mu_g}{\sigma_g + \varepsilon}, \qquad \mu_g = \frac{1}{G}\sum_j r_j, \qquad \sigma_g = \sqrt{\frac{1}{G}\sum_j (r_j - \mu_g)^2}$$

This form is taken from the Phase-1 report. In the GRPO scaling equation above, σ_g is the population standard deviation, with 1/G as written. Other explicitly labelled uses below employ sample variance. The inspected runners that divide by a within-group standard deviation use that convention; rows without scaling or with unrecoverable execution settings remain distinct. Two places use the unbiased $1/(G-1)$ form instead: the reference `zvf()` of §4.3, whose `ddof=1` sample variance leaves exact ties unchanged but can change classification at a positive tolerance, and the batch-wide whitening of the PPO arm in the same-stack run. The ZVF-definition figure (Figure 4.4) also shows the unbiased form, which gives $\sigma_g \approx 0.535$ for its example group where the population form gives 0.5. When $\sigma_g = 0$ every A_i is zero, so the whole group contributes no gradient through the advantage term. Whether anything else acts depends on the executed loss: KL regularisation and auxiliary or critic losses can remain nonzero. Clipping alone does not create a policy-surrogate gradient when the advantage is zero. The zero-gradient statement is therefore confined to the reward-relative surrogate in verified group-centred implementations; it is not a claim that the whole optimiser step vanishes. Table 4.2 distinguishes verified absence, configuration evidence and unknown managed settings.

Two further design choices distinguish this telemetry from conventional training curves. The first is that the raw per-group reward tensors are retained, not only the summaries computed from them. This makes a published number auditable by recomputation: any downstream diagnostic, such as `p2_collapse_analysis.py`, can reproduce a reported statistic from the stored tensors rather than trusting a logged summary. The convention has been exercised: study P2 recomputes three stored GSM8K group tensors (Qwen3-8B sampling runs, G = 8) from their raw values rather than reading the figures back from a log line, and the recomputed values are reported in Chapter 6 §6.3.1. The second is that the logging layer is treated as part of the apparatus and is expected to fail. An early Weights & Biases integration used the library's thread-unsafe global run object from multiple worker threads, which produced repeated "Run is finished" summary-write failures; the fix was to give each run its own process in `campaign.py`. The defect is recorded because telemetry that silently drops writes is indistinguishable from telemetry showing a healthy run, and the remedy — process-level isolation per run — is a structural property of the campaign rather than a patch.

4.3 Formalising the Zero-Variance Fraction

We distinguish the exact-tie fraction, ZVF_0, from the tolerance-based diagnostic, ZVF_ε. The first counts groups with identical observed rewards; the second also counts near-ties. Unless explicitly labelled exact-tie, ZVF here uses the following sample-variance threshold. Formally, for a batch B_t of prompt groups at step t, each group g contributing K sampled completions with rewards $r_{g,1}, \ldots, r_{g,K}$,

$$\mathrm{ZVF}_t = \frac{1}{|B_t|} \sum_{g \in B_t} \mathbf{1}\left[\widehat{\mathrm{Var}}(r_{g,1}, \ldots, r_{g,K}) \leq \varepsilon\right]$$

where $\widehat{\mathrm{Var}}$ is the unbiased sample variance and $\varepsilon = 10^{-6}$ for rewards normalised to [0, 1]. The exact-tie formulation used in some internal sources instead writes $\mathrm{ZVF}_t = \frac{1}{|P_t|} \sum_{p \in P_t} \mathbf{1}[\mathrm{Var}_{c \sim C(p)}\, r(c) = 0]$, with $C(p)$ the set of sampled completions for prompt p. These formulations agree for the stored binary rewards at G = 8 and $\varepsilon = 10^{-6}$, but are not interchangeable for perturbed or continuous rewards. In particular, the micro-jitter test changes exact ties while leaving this tolerance-based diagnostic unchanged (§6.3.1). The reference implementation is deliberately small, so that the diagnostic cannot acquire hidden behaviour:

```
def zvf(rewards_2d: np.ndarray, eps: float = 1e-6) -> float:
    # rewards_2d shape: [num_groups, K]
    var_per_group = rewards_2d.var(axis=-1, ddof=1)
    return float((var_per_group <= eps).mean())
```

Gradient utilisation is then defined as its complement, $\mathrm{GU}_t = 1 - \mathrm{ZVF}_t$. The complement is a descriptive accounting identity, not a claim about optimiser behaviour. Its scope must be read against the runner actually used, so the loss form of every study is listed in Table 4.2, read from the runner code rather than from the internal reports' prose. Three facts in the table govern how ZVF is interpreted. First, an exact-tie group has zero reward-relative surrogate gradient only where the runner actually centres advantages within that group. Near-ties counted by ZVF_ε need not have exactly zero advantages. TRL's dump records $\beta = 0.04$ and an on-device reference model, its launcher leaves β unspecified, the PPO roster inherits adaptive-KL defaults, and the managed dump has β = null. None of these is evidence of zero executed KL; unknown remains unknown. Even verified zero-KL runs can update through optimiser state, regularisation or auxiliary losses. Second, the inspected custom-loss Tinker reference runners are REINFORCE with a group-mean baseline (the actor's historical source binding is incomplete; Appendix D): the loss is $-A_i$ times the summed token log-probability, averaged over completions, with no importance ratio and no clipping, and this thesis calls

them that rather than GRPO in the strict sense. Third, the runners labelled GRPO are not one loss: the same-stack and Dr. GRPO studies use a clipped ratio with two inner epochs, the Tinker runners do not, and the Phase-1 four-method run divides by no σ even in its "grpo" arm. The scope must consequently be checked per row, including auxiliary losses, masks and source-binding gaps, rather than inferred from the algorithm label (Figures 4.4 and 4.5).

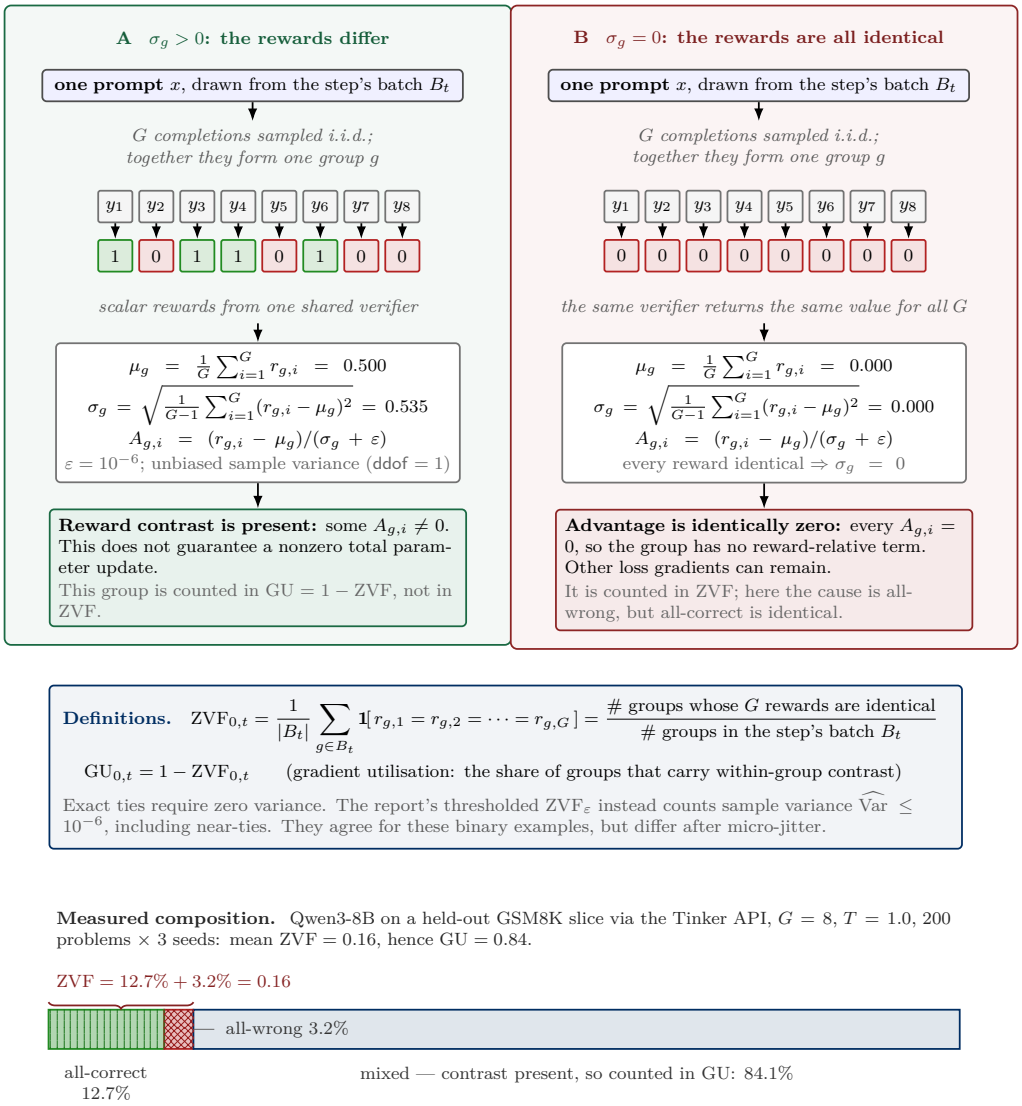


Figure 4.4: Definition of the Zero-Variance Fraction. One prompt produces G completions with scalar rewards; when the within-group reward standard deviation is zero the advantage is identically zero and the sample contributes no reward-relative surrogate gradient. Exact ties and the sample-variance threshold are distinguished in the text; they agree for the binary rewards illustrated here. The composition bar is measured on Qwen3-8B, held-out GSM8K slice, $G = 8$, $T = 1.0$, 200 problems × 3 seeds; all-correct (vertical hatch) and all-wrong (cross-hatch) together make up the ZVF.

Loss form by study, read from the runner code.

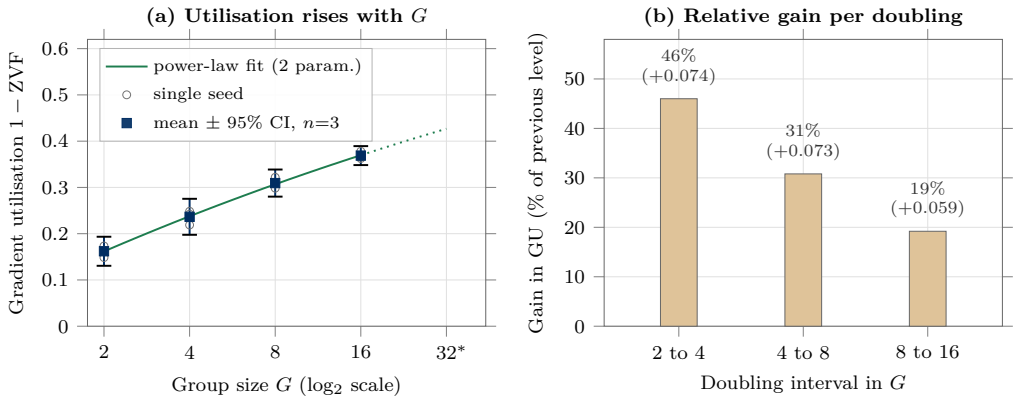


Figure 4.5: Gradient utilisation, $1-\mathrm{ZVF}$, as a function of group size G. Qwen2.5-0.5B, arithmetic-correctness task, 40 steps, 16 prompts, $G \in \{2, 4, 8, 16\}$, seeds 42/123/456 ($n = 3$ per G; `groupsize_zvf_sweep.json`). (a) Open circles are single seeds; squares are seed means with 95% t-intervals ($df = 2$). The line is the complement $\mathrm{GU} = 1-\mathrm{ZVF}$ of a two-parameter power law, $\mathrm{ZVF} = 0.922\, G^{-0.137}$, fitted to the four means (2 residual degrees of freedom), so it is descriptive rather than a validated law; $G = 32^*$ was not trained and the dotted segment is extrapolation. (b) The absolute gain per doubling is nearly constant (+0.074, +0.073, +0.059), so the diminishing return is relative: 46% → 31% → 19% of the previous level. Utilisation stays below 0.37 at $G = 16$.

Table 4.2: Loss forms from inspected current or candidate runners. The current reference loop passes response lengths to its custom closure and can enable auxiliary NLL; the historical actor execution source is unrecoverable, so its preset is not proof of its executed loss or mask. M = `platform_hybrid/experiments/modal/`, T = `platform_hybrid/experiments/tinker-runs/`, C = `zvf-program/colab-experiments/`. "n/a" means the study does no training; "not recoverable" means the repository does not hold the code or configuration that ran.

Study / run family	Runner	Ratio / clip	KL / reference	Token mask	Advantage	Critic	LoRA r	lr	G	Steps
Current Tinker default custom path; actor preset reconstruction (Appendix D)	`platform_tinker/tinker_rrl/grpo.py`	none in custom path; actor execution unknown	no KL in custom term; actor unknown	current loop: response only; actor unknown	default ($r - \mu$)/($\sigma + 10^{-8}$), 1/G	none by default	32	1e-5 (actor preset); 3e-5 default	4 (actor preset); 8 default	40 (actor preset)

Study / run family	Runner	Ratio / clip	KL / reference	Token mask	Advantage	Critic	LoRA r	lr	G	Steps
P1 cross-scale Tinker anchors	T/`scripts/tinker_parallel_runner.py`, T/`campaign_v2.py`, T/`scripts/world_class_experiments.py`; per-anchor lineage for the frontier anchors not recoverable	none in candidate source; execution unknown	none in candidate source; execution unknown	full sequence in candidate source	$(r - \mu)/\sigma$, 1/G in candidate source	none	32	3e-5	8	20–30 logged
P2 recomputed tensors (0.130 / 0.190 / 0.155)	`platform_hybrid/experiments/tinker_direct_eval.py` (sampling only, Qwen3-8B)	n/a	n/a	n/a	ZVF from population variance	n/a	n/a	n/a	8, T = 1.0	0
P2 Phase-1 four-method batch (0.72–0.77)	T/`scripts/n2_reward_tensor_20260704.py`	Tinker `importance_sampling` ratio against sampler log-probs; no clip	none	completion only	$r - \mu$, no σ division (all arms)	none	32	1e-5	8	40
P3 Qwen2.5-0.5B arithmetic sweep	M/`modal_groupsize_zvf_sweep.py`	none	none	completion only	$(r - \mu)/(\sigma + 10^{-6})$, 1/G	none	16 (q, v)	1e-4	2, 4, 8, 16	40
P3 Qwen3-8B matched-budget panel	T/`live_zvf_probe.py` (schema match; no launcher link)	none in candidate source; execution unknown	none in candidate source; execution unknown	full sequence in candidate source	$(r - \mu)/(\sigma + 10^{-8})$, 1/G in candidate source	none	4	3e-5	2 / 16	160 / 20

Study / run family	Runner	Ratio / clip	KL / reference	Token mask	Advantage	Critic	LoRA r	lr	G	Steps
P3 Qwen3.5-4B openings	`platform_hybrid/experiments/openings/groupsize_zvf.py`	none	none	full sequence	$(r - \mu)/\sigma$, 1/G; zero-variance groups skipped	none	8	3e-5	2–16	8
P4 arithmetic, GRPO vs Dr. GRPO	M/`modal_drgrpo_vs_grpo.py`	token-level ratio, clip 0.2, 2 epochs	none	completion only	GRPO $(r - \mu)/(\sigma + 10^{-6})$, 1/G; Dr. GRPO $r - \mu$	none	16	1e-4	8	40
P4 GSM8K-CoT, Qwen2.5-1.5B-Instruct	M/`modal_drgrpo_gsm8k_cot.py`	as above	none	completion only	as above	none	16	1e-5	8	30
P4 Qwen3-8B raised-cap extension (1,024 tokens)	T/`live_zvf_probe.py` (`--loss drgrpo`)	none	none	full sequence	GRPO 1/G; Dr. GRPO $r - \mu$	none	4	3e-5	8	30
Same-stack PPO vs GRPO	M/`modal_samestack_ppo_grpo.py`	both arms: sequence-level ratio on length-normalised log-prob, clip 0.2, 2 epochs	none	completion only	GRPO $(r - \mu_g)/(\sigma_g + 10^{-6})$, 1/G; PPO $r - V$, whitened over the batch with $1/(n - 1)$	PPO: linear value head on the prompt-end hidden state, 0.5 · MSE loss; no GAE (one-step)	16 (q, v)	1e-4	GRPO 16 prompts × 8; PPO 128 prompts × 1	40
P7 Colab four-arm audit	C/`e3_open_audit.py`	sequence-level ratio, clip 0.2 (DAPO 0.2 / 0.28), 2 epochs	none	completion only	population variance; Dr. GRPO $r - \mu$; zero-variance groups dropped	none	full fine-tune	2e-6	4, adaptive up to 10	10

Study / run family	Runner	Ratio / clip	KL / reference	Token mask	Advantage	Critic	LoRA r	lr	G	Steps
P7 Tinker adaptive-G	T/`scripts/qp7_adaptive_g_20260704.py`	Tinker `importance_sampling` ratio; no clip	none	completion only	$r - \mu$	none	32	1e-5	$4 \rightarrow 6 \rightarrow 8$	16
Tinker side of the Tinker/TRL pair	launcher not recoverable; config dump `framework_config_dumps/tinker_qwen3_8b_gsm8k.yaml`	not recoverable	unknown (managed; dump β null)	not recoverable	not recoverable	none	16 (dump)	1e-5	8	30
TRL side of the Tinker/TRL pair	M/`modal_grpo_trl.py` (TRL `GRPOTrainer`)	TRL defaults, not set in code	code unspecified; dump β = 0.04, on-device reference	TRL completion mask	TRL default scaling	none	32 in code, 16 in dump	1e-5	8	30
P1-roster PPO baselines	M/`modal_ppo_campaign.py` (TRL `PPOTrainer`)	TRL PPO defaults (clip, GAE, adaptive KL)	adaptive-KL defaults; executed settings unrecorded	TRL default	TRL whitening	value head	32	1e-5	n/a	not recorded

Budget matching is defined per experiment rather than inferred from a common step count. The primary arithmetic G sweep uses 16 prompts per step for 40 steps, so G = 2, 4, 8 and 16 require 1,280, 2,560, 5,120 and 10,240 generated completions respectively; it is a fixed-prompt, fixed-step sweep, not a matched-token comparison. The original PPO/GRPO comparison fixes 128 completions per step but changes prompt exposure; the later GSM8K comparison fixes 64 completions per step with the same issue. The separate Qwen3-8B panel fixes 2,560 rollouts while changing optimiser steps, and the curriculum re-test explicitly fixes a 30k-token budget. Equal rollout counts do not establish equal generated tokens, wall-clock cost or optimisation opportunity. Each result is interpreted against the budget it actually controls.

Three properties make the definition more than a restatement of the training loop. First, it is non-tautological under a simple null: if completions were independent Bernoulli draws with per-prompt success probability p_g, then $\mathbb{E}[\mathrm{ZVF}_t] = \mathbb{E}_{p_g}[p_g^K + (1 - p_g)^K]$, a quantity that depends on the model's accuracy distribution and the group size rather than

on the observed batch. The identity pass@$G - p^G = 1 - h_G(p)$ follows algebraically for the model expectations under the same i.i.d.-Bernoulli model and is therefore reported as an algebraic remark rather than as evidence. Second, it is checked against that null on instrumented runs: a Qwen2.5-0.5B sweep over G $\in \{2, 4, 8, 16\}$, three seeds and 40 steps — twelve runs and 480 logged steps — compares per-step observed ZVF with the Bernoulli-null prediction $p^G + (1-p)^G$. Because the null for each step is computed from the same step's mean reward, a high correlation is partly mechanical, so the comparison is designed as a shape check rather than a validation, and the baseline used is the per-step average of the closed form (results in Chapter 6 §6.3.3). Third, at larger scale the same instrument is run on Qwen3-8B against GSM8K test problems through the Tinker managed API at G = 8, temperature 1.0, over 200 problems and three seeds (sampling only, no training; these are the same three stored tensors whose ZVF P2 recomputes), with the zero-variance groups decomposed into all-correct and all-wrong and compared with the same null. Deviations from the null in either direction are not read as evidence about dependence between completions.

That the quantity is portable across libraries is a separate, weaker claim, and the project states its limits explicitly. A normaliser at `platform_modal/scripts/zvf_compute_cross_framework.py` maps each framework's reward and mask fields onto the common definition — TRL's `rewards` with `batch_size / group_size` and `completion_mask`; Tinker's `rollout.reward` with `rollout.group_id` and `rollout.eos_mask`; OpenRLHF's `reward_score` with `prompt_index` and `attention_mask`; veRL's `data_source/reward` with `uid` and `response_mask` — and emits JSONL records of the form `{step, zvf, batch_reward_mean, n_groups, K}`. The scope correction attached to that parser is that it normalises reward logs and does not make its runner canonical GRPO; because the project does not bundle raw per-group rollout JSONL for every framework, no fresh four-way pointwise ZVF overlay is claimed, only the narrower implementation-level portability claim. The threshold ε is fixed in advance, and its sensitivity is reported with the P2 results in Chapter 6 §6.3.1. Boundary conditions are declared where the diagnostic does not apply: dense or continuous reward signals, K = 1, SFT-saturated baselines and non-outcome-reward RL all fall outside the setting in which the definition is meaningful.

The methodological point of this section is that ZVF is a diagnostic and not a metric. The design commits to that position before the results rather than inferring it from them, and it takes four precautions. First, because the statistic is unsigned, a high value is read as consistent with either a solved or an unsolved task and never as a score in one direction; the 368-run audit that shows both extremes is reported in Chapter 7 §7.1 and §7.3. Second, a pooled association between ZVF and performance is always broken down by task

type before it is read, because the task mix of a pool can set the sign of the association (results in Chapter 6 §6.3.4). Third, the historical pooled association is retained only as an audited source result: it mixes synthetic cells and heterogeneous outcomes, including late training reward, and cannot validate held-out prediction. Fourth, no step-level p-value is computed on the 480 autocorrelated steps of the instrumented sweep, because treating correlated within-run steps as independent samples would manufacture significance. One further boundary is recorded for the same reason: a variance-mitigation table in the internal report sources is a declared simulation projection and not evidence, and its rows are read as synthetic rather than as independent library deployments. The result of these choices is a diagnostic that is useful for describing where within a batch the learning signal is and is not, and that is explicitly not proposed as a quantity to be maximised, ranked or reported as a headline score.

4.4 The Eight-Study Portfolio

Semester 3 delivered the shared code and the initial experimental foundation; the Semester 4 programme — the research direction, the expanded experiments, the analysis and the P1–P8 internal reports — is the present author's solo continuation, and the roster records 206 analysis iterations behind the numbers reported in this thesis. The portfolio is organised as eight studies, each written up as an unpublished internal report, each asking one question and each carrying its own claim boundary; the titles quoted below are the internal reports' working titles. This section states the questions and designs; the results are in Chapters 6–7 and, for P8, Appendix F. The questions and boundaries are stated here because they are methodological commitments: a study's question determines which comparisons it may make, and the boundary states what it declines to conclude.

P1, "Scaling Laws for GRPO Post-Training of Language Models: A Cross-Library, Cross-Scale Study", asks whether GRPO post-training outcomes scale with model scale in a way that can be fitted and extrapolated. Its evidence base is more than seventy runs across seven RL libraries and five model families from 0.6B to 1T parameters, fitted with saturating forms and tested for a cross-scale slope. The frontier anchors — Qwen3-235B-MoE, DeepSeek-V3.1, Kimi-K2 and Nemotron-120B — were run through the Tinker managed API in a single-seed, descriptive-only regime, so the report's claim boundary is a descriptive limits-and-identifiability audit rather than a positive scaling law; matched multi-seed cross-scale runs are an explicit non-claim. Results are in Chapter 6 §6.2.

P2, "The Zero-Variance Fraction: A Descriptive Diagnostic for Signal Starvation in

GRPO", asks how much of a training batch carries usable group-relative signal, and whether that fraction predicts the final outcome. In this thesis P2's contribution is *instrumentation*: the predictive question is not answered, because no measured-only, held-out-endpoint validation was run (Chapter 6 §6.3). The study characterises ZVF descriptively, treats the identity of §4.3 as algebraic rather than empirical, audits a historical pooled association whose mixed synthetic membership and heterogeneous targets cannot establish held-out prediction, and marks the variance-mitigation table as a simulation projection; the retired roster item that previously carried a causal framing now lives under `archive/absorbed/R02_main_zvf/`. Results are in Chapter 6 §6.3.

P3, "Group Size in GRPO: Contrast Density and the Bridge to DPO", asks how trainability varies with the group size G and whether GRPO admits an all-pairs preference interpretation. Its measured sweep covers $G \in \{2, 4, 8, 16\}$ on the near-ceiling arithmetic task, with seed-level equivalence tests against $G = 2$ and a one-way test of held-out accuracy across G. No directly trained matched-budget $G = 32$ cell exists, so every $G = 32$ training-performance value in P3 comes from an explicitly labelled reconstructed token-budget grid and is held as a hypothesis rather than a measurement. The claim boundary is that the data may not be read as a universal optimum, and the all-pairs preference reading resembling DPO is offered as an interpretation and not as a proven equivalence. Results, including a conditional utility audit over 505 tasks, are in Chapter 6 §6.4.

P4, "Length Bias and Held-Out Generalization in GRPO and Dr. GRPO", asks whether the verbosity trap associated with GRPO appears in the measured regime and whether either method changes held-out accuracy. Its controlled comparison runs GRPO against Dr. GRPO on a near-ceiling arithmetic task and in a short-horizon GSM8K chain-of-thought regime with a 200-token generation cap, alongside a multi-seed Qwen3-8B pre-RL versus post-RL held-out control. The 200-token cap bounds the claim: under a cap that already controls length, absence of the verbosity signature would be the expected outcome rather than a positive finding. Results are in Chapter 6 §6.5.

P5, "Report the Stack, Not the Label: RL-for-LLM Results Are Stack-Conditioned", asks how much of a reported result is attributable to the stack rather than to the algorithm label, and what a reportable stack must contain. Three exhibits carry the argument: a nominally matched-configuration backend audit, a same-label "DAPO" comparison between true dynamic sampling on an open trainer and an asymmetric-clip surrogate on a closed stack, and a twelve-cell head-to-head of four labelled algorithms on one fixed stack; their results are in Chapter 7 §7.1. The study proposes an eight-item minimum reportable stack (seven run-manifest fields and one evaluation item) — loss form; reference-policy and KL handling; sampler, backend and precision including base-checkpoint identity by revision or hash; per-step ZVF and gradient-utilisation trajectory; group-size schedule; a disjoint held-out split; decontamination plus a parser-

robustness probe; and held-out pass@k curves alongside pass@1 — and formalises an RL-reproducibility threat model with declared-difference grades R0–R5 (formerly "flip-risk grades", renamed 19 October 2026). This is the standard this thesis is written to.

P6, "GRPO-Registry: A Machine-Readable Catalog of Group-Relative RL Stacks and Their Variant Deltas", asks whether stacks can be compared mechanically rather than through prose. It defines stack records carrying the seven manifest fields of the MIN-REPORT-RL standard, a per-component variant-delta status, three variant-delta records verified against the DAPO, Dr. GRPO and GSPO papers, twenty seed stack entries, and a reference CLI with a 0–100 MIN-REPORT auditor badge and a `stackdiff` command that maps a pair of entries to an R0–R5 declared-difference code (formerly "flip-risk verdict"). The study is explicitly a resource study rather than a second ranking, and it cites P5's seventeen-fold exhibit only to motivate the schema. Results are in Chapter 7 §7.2.

P7, "From Diagnostic to Controller: A Signal-Starvation Theory of GRPO and an Adaptive Group-Size Intervention", asks whether the diagnostic of §4.3 can be turned into a control signal. It models usable learning signal per prompt as $S = p(1-p)(1-h_G(p))$ with $h_G(p) = p^G + (1-p)^G$, yielding three testable consequences: that the expected ZVF indicator equals $p^G + (1-p)^G$; that larger G lowers ZVF; and that gradient magnitude tracks p(1 − p). Each consequence is paired with a measurement that could falsify it: the 368-run audit, a model-by-group-size grid, and a toy-scale open-backward-pass experiment whose result is admitted as directional only. The study promotes pairwise-contrast density, PCD = (G − 1)/G · E[p(1 − p)], as the candidate control signal, subject to an exact-tie micro-jitter sensitivity test, which does not falsify tolerance-based ZVF, and then audits an adaptive group-size controller against fixed recipes and DAPO-style dynamic sampling on a four-arm open trainer and in a counterfactual controller trace. Results are in Chapter 7 §7.3. The methodological commitment that governs this study is stated at its head: adaptive group size is not promoted, and no result establishes prospective superiority over static G = 16, Dr. GRPO or dynamic sampling.

P8 occupies the eighth slot with a study outside the RL programme, "LLM vs. XGBoost in Credit-Card Fraud: Sensor and Scribe, Not Scorer". Its question is whether a large language model should be used as the fraud scorer or as a component around one, and it is designed as a comparison of a boosted-tree model with a Qwen3.5-4B scorer on held-out splits, with the scorer's cost as a triage component recorded alongside its accuracy. Results are in Appendix F. The roster evolved after the semester-4 title list was fixed, and the present position is recorded as it stands: the fraud study is parked outside the ZVF thesis, contributes no RL evidence, and is retained for its measurement discipline; the active P8 slot in the current report roster is an exploratory workshop artifact. No result from P8 is used anywhere in this thesis to support an RL claim.

4.5 The Design of the E1–E14 Evaluation Campaign

The evaluation campaign is the applied half of the programme and is deliberately narrow in a way that makes its results interpretable: it evaluates one actor against fourteen benchmark lanes under stated receipt, budget and decontamination procedures. The retained identity record names two training sources, but does not establish exact consumed-row membership or global benchmark disjointness. The single actor is the base model `Qwen/Qwen3.6-35B-A3B` at commit `995ad96e…`, with adapter `campaign-adapter` at commit `withheld-adapter-revision…`, in bfloat16. How that adapter was trained is reconstructed in Chapter 8 §8.1.1. The reported training sources are API-Bank-RLVR and SWE-Gym. Their names alone do not establish that all fourteen evaluation populations were held out: the consumed-row inventory and dirty source diff remain unresolved. Per-suite overlap checks have a narrower declared scope. The content check below covers LAB-Bench, AgentDojo and Omni-MATH, the E11 receipt records its own verified decontamination, and the E10 receipt itself declares `heldout_claim: false`. One actor fixes the object of study: every reported per-suite figure describes the same frozen policy, so a difference between two suites is a property of the suite and not of a model swap. The design consequence is that the campaign cannot support model-comparison claims at all, and it makes none (Figure 4.6).

Evaluators are the suites' own scorers, used natively rather than reimplemented, and they are pinned by revision. The surviving native runners live under `zvf-program/flagship/`, including `e1_swe_bench_pro_full_eval.py`, `e11_verilog_eval_decontamination.py`, `eval_pavlov_sdab.py`, `eval_pavlov_xlam.py`, `mle_bench_eval.py` and `eval_apex_agents.py`. The evaluation-side revisions pinned for the decontamination audit are LAB-Bench `998a8e0a40cf116c80e1b0e7a805ebb5fb9fa838`, AgentDojo `089ed468cf3ed0322acc66b0211f26d9d90dbf60` and Omni-MATH `40ba231d8f16e29ecd40e6407e2c8640145a8f62`, with the training-side envelope pinned at API-Bank-RLVR `bf67c42626f02c305514b1df16dcabc5fc616333` (597 rows, MIT) and SWE-Gym `bb94ed9e39bbeb96a7fcbfb533b80f25a7fd59cb` (2,438 train rows, MIT). Using the native scorer is a substantive choice and not a convenience: when the Omni-MATH lane produced two rows whose judged outputs were truncated before any equivalence verdict, the native scorer's omission of missing-verdict rows was adjudicated as correct official behaviour rather than a parser bug, and the lane closed without re-judging. A new judge run would create a different evidence version and could change verdict coverage or the score; its result cannot be assumed in advance.

For the training-selection protocol, sampling is frozen rather than merely recorded: temperature 0.1, top-p 0.95, one sample per row, a maximum of 128 response tokens, with

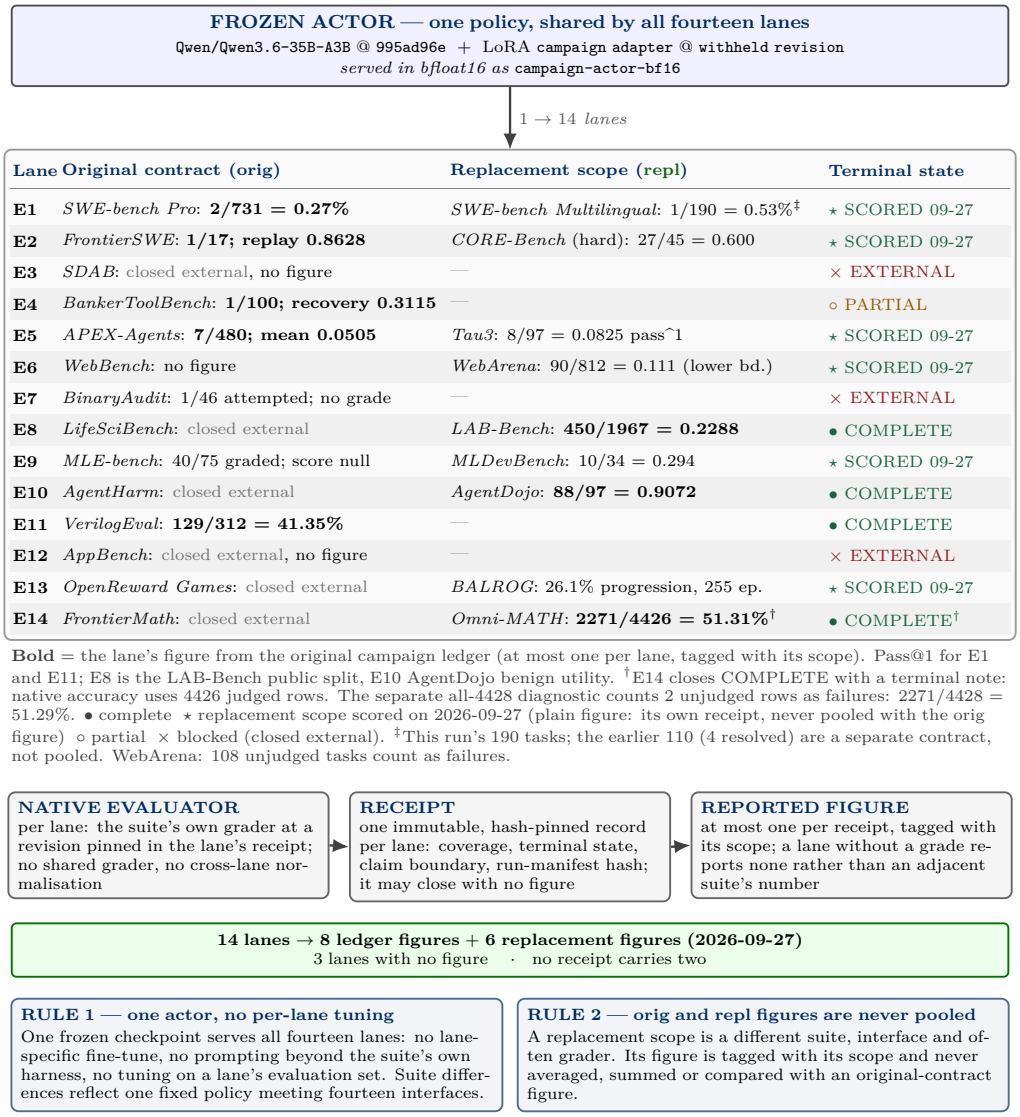


Figure 4.6: Design of the E1–E14 native-benchmark evaluation campaign. One frozen actor is assigned to all fourteen lanes. Executed scopes use their named evaluators and revision records; unavailable original contracts remain blocked. Each lane lists its original-contract suite and, where one exists, its replacement scope side by side; Figure 8.1 names the replacement scope where one exists. Figures and terminal states come from the 2026-09-19 ledger (`E1_E14_FINAL_RESULTS_2026-09-19.md` and `finish/Pending_Experiments.md`; eleven named deterministic checks pass, scope in App. B), updated with the six replacement scopes scored on 2026-09-27 (⋆; `finish_pending_2026-09-27/<lane>/result.json`), which are separate receipts and are never pooled with a lane's original-contract figure. E14's native accepted-set accuracy is 2271/4426 = 51.31%; its separate all-disposition diagnostic is 2271/4428 = 51.29%, counting the two unjudged rows as failures.All actor-dependent figures are stored-evidence end-to-end harness scores, not replayed and not capability measures (Chapter 8 gives failure-mode rates).

the service seed fixed where the provider supports it and otherwise recorded in the receipt. Prompt and response limits are 1,200 and 128 tokens respectively, and the same source requires the strict verifier implementation to be hashed before paid work, with a perfect call defined as a verifier score of exactly 1.0 and no parser, target, split or verifier change permitted mid-campaign. Freezing the sampler addresses the failure mode in which a benchmark score quietly improves because decoding became more favourable between runs; it also fixes the comparison between the base reference and the adapter, which is evaluated side by side on untouched manifests. The 128-token setting belongs to that protocol only. The E1–E14 lanes were decoded under each suite's own settings, which range from 1,024 to 8,192 output tokens at temperatures 0 to 0.2, and are recorded per lane in the serving table of Chapter 8 §8.1.2. The actor's own training run also departed from the protocol in several fields (§8.1.1).

The receipt model is freeze-before-paid-work, and it is the part of the campaign design that carries the most methodological weight. Before any paid phase a run must record an immutable base-model revision, tokenizer revision, container or environment digest and adapter revision; the selection slice and the disjoint holdout are re-created from a pinned dataset revision and sealed, are write-once, are not mounted in training, and the word "holdout" is reserved for a suite or manifest only once its split, task-ID, license, runtime and decontamination receipts are complete. Under the prescribed protocol, the selection slice informs arm decisions and cannot supply confirmatory evidence; final evaluation manifests must not be used to choose an arm, alter a prompt, or re-run a failed suite with a more favourable split. This states the rule, not independent proof of every historical execution's compliance. Tracking is verified before spend rather than after: an online Weights & Biases run must be initialised and its Tinker run identifier recorded before the first paid step, every step records loss, reward, configuration, seed, split identity and cumulative cost, and every checkpoint is published to Hugging Face with a unique repository or revision URL, with a failure of any of these stopping the run fail-closed. If a receipt is missing, the phase is blocked rather than silently shortened. At handoff the protocol requires four separate evidence classes to be reported apart: completed receipts; operational and provenance receipts; prospective gates and budget projections; and admissible final results, the last existing only if every gate passed.

That last distinction has teeth in practice, and the campaign's disposition record shows it. The portfolio-level protocol defines a predeclared equal-domain macro average over sixteen domains, a conjunctive coverage gate, an integrity gate, a global improvement gate requiring the lower bound of a one-sided 95% interval for the portfolio difference to exceed zero, a domain no-regression guard with a predeclared five-percentage-point tolerance, and a safety guard bounding any violation increase by two percentage points — and it states that a cost cap may not be met by dropping domains or suites, and that a

suite or domain which is missing, underpowered, contaminated or outside the cost cap must be labelled incomplete or blocked, "not negative and not positive". The portfolio training phase was never launched, so the campaign does not report a portfolio result; the recorded outcome is a set of per-lane evaluations of the one adapter, and the protocol's own instruction that a partial subset is not a portfolio result and may not be relabelled as one is honoured throughout.

Lane dispositions are recorded in a seven-state taxonomy rather than as pass or fail: COMPLETE, for lanes with verified full-coverage results and no open gate (E8 public, E10 benign, E11); COMPLETE_TERMINAL_NOTE, for a lane complete under the native protocol with a recorded terminal note (E14 replacement); CLOSED_EXTERNAL, for lanes with no local or paid path, closed by written closure records (E3, E7, E8-private, E10-private, E12, E14-private); PENDING_QUOTA, for lanes gated on cloud quota resolution alone (E6, E9); AMENDMENT_ACCEPTED_LAUNCH_PENDING (E2, E13); REBUILD_READY_LAUNCH_PENDING (E1 wave10, E5 successor27); and CLOSED_PARTIAL (E4). Those are the states of the 19 September ledger. The three pending states were emptied on 27 September, when the E1, E2, E5, E6, E9 and E13 replacement scopes were run to completion (§8.4). This report assigns them COMPLETE on coverage, with two qualifications recorded against the label: E6 still has 108 tasks awaiting a judge, and E1's coverage spans two contracts reported separately. The taxonomy exists so that a lane which has not been measured is not silently absorbed into a percentage. Carried alongside it is the project's evidence rule, stated in the ledger of record and repeated in every results artefact: original-contract and replacement-scope numbers are never pooled. The rule is not cosmetic. The original-contract E1 lane and its replacement scope are different suites with different task populations, and a table that added them would produce a number that corresponds to no benchmark.

Decontamination is handled as a declared deterministic procedure with its own stated limits. The check hashes complete UTF-8 fields and then normalised fields with SHA-256; for fields of at least eight tokens it hashes each consecutive eight-token sequence and computes exact set Jaccard similarity for every training and evaluation pair sharing a shingle; and it tests whether an entire normalised evaluation field is a token-bounded contiguous substring of a training field. Against the pinned training envelope, the per-suite inventories were 1,967 LAB-Bench tasks over 13,113 text fields with 5,105 eligible for eight-token near checks, 97 AgentDojo tasks over 71,966 fields with 9,382 eligible, and 4,428 Omni-MATH tasks over 13,284 fields with 9,394 eligible; the count of near pairs at or above 0.80 was zero in all three suites, and the maximum eight-gram Jaccard similarity was 0 for LAB-Bench and AgentDojo and 0.13414634146341464 for Omni-MATH, below the declared 0.80 threshold, with all 1,338 candidate pairs sharing an eight-gram examined. Short exact matches of zero to three normalised tokens

were retained and enumerated rather than dropped — the longest examples being seven characters in the LAB and Omni inventories and at most seventeen raw characters in AgentDojo, such as “Paris” and “Conference Room A” — and the audit states plainly that these collisions do not demonstrate duplication of a task but do make an unqualified “zero overlap” claim incorrect. The audit’s scope limits are recorded with equal care: it does not reconstruct which training records were consumed: 512 is the size of the training pool recorded in the E11 decontamination receipt (`selected_training_row_count`), from which the 40-step run drew 80 prompts at two per step, and the transform and consumed-row inventory that would identify them were not recorded; it establishes a content comparison against the verified historical source envelope rather than proving global pretraining cleanliness, semantic disjointness, character-edit disjointness or image cleanliness; ASCII normalisation loses mathematical punctuation and non-ASCII text; and fields shorter than eight tokens fall outside the near-match and containment rule. The audit itself is receipted: it re-verifies Weights & Biases run `withheld-id` against `training_identity_verified.json`, matches the 23,733 original source-field document hashes to the historical E11 receipt, adds 2,507 decoded nested API-Bank strings to reach 26,240 source documents, and records 43,977,748 bytes downloaded against a 500 MiB cap, with the checker not having enumerated the roughly 2.58 billion possible document pairs.

The campaign records incomplete execution explicitly. Some September lanes remained blocked by infrastructure or readiness conditions and were completed on 27 September after changes to the execution environment. The per-lane protocol deviations and results remain separate (§8.4). Private account state, access routes and operational approvals are omitted from the public derivative.

The campaign also carries its integrity accounting in the same register. Eleven of eleven deterministic checks passed on 2026-09-19, covering exact divisions, receipt presence, sealed-artifact hash equality and lost-source absence probes. A judgment layer was added for classification, faithfulness and value-ordering questions and then partly invalidated by an external service outage: both blocker-classification batteries returned degenerate distributions after the incident, their receipts are retained as incident evidence, and the per-lane blocker column therefore rests on document evidence and not on model judgment. A design rule was banked from the healthy window and is followed in this thesis: arithmetic and string lookups stay in code, and model judgment is reserved for classification, faithfulness and value ordering, because a parity probe was answered incorrectly even while the service was healthy.

What the campaign does not claim follows directly from the design. It does not claim improvement over any baseline anywhere, because no lane carries a test establishing it. The one trained-versus-base comparison is the paired small-scale rerun of Table 8.B,

with 5 to 151 identical items per lane, and its outcome is reported in Chapter 8; the campaign's role in this thesis is to fix the evaluation protocol, the receipt discipline and the disposition taxonomy that any future improvement claim would have to satisfy. It does not claim that the fourteen suites constitute a portfolio result. It does not pool original-contract with replacement-scope figures, and it does not average across suites. Its one trained actor means it says nothing about model comparisons. And where the record is incomplete — a lost execution source, an unavailable external benchmark scope — the incompleteness is written into the ledger rather than resolved by inference.

4.6 C1 Frozen Policy Diagnostic and Reference Review

C1 completed 4,096 fixed-order screening questions with eight independently seeded responses per question. Eligibility required all eight outputs to be parseable, uncapped and assigned zero exact-match reward by frozen parser v2. After the full screen, the first 64 of 87 eligible questions received 24 additional responses each. Selection was truncated deterministically; the 23 other eligible questions were not followed up. The primary endpoint is whether at least one of the 24 fresh responses receives parser-defined exact-match reward one. No question was removed or relabeled after review. [S1, S13]

The new workload contains 32,768 screening responses and 1,536 fresh follow-up responses, totaling 34,304 new draws. A disjoint historical smoke cohort contributes 1,024 retained draws imported once, giving 35,328 recorded unique draws. The historical smoke is an operational quality record, not part of the primary denominator. The 512 initial responses for the selected 64 questions are already included within screening, and must not be counted again. [S1, S10]

The model and tokenizer were Qwen/Qwen3-8B at revision `b968826d9c46dd6066d109eabc6255188de91218`, with BF16 and thinking disabled. The dataset was openai/gsm8k, main configuration, train split, revision `740312add88f781978c0658806c59bc2815b9866`. Generation used temperature 0.7, top-p 0.8, top-k 20, min-p 0, a 1,024-token generation cap and 4,096-token context. The recorded execution used one NVIDIA A100-SXM4-80GB, vLLM 0.11.0, PyTorch 2.8.0 and Transformers 4.57.1, with eager execution enabled and prefix caching disabled. Fixed request seeds do not imply bitwise reproducibility across hardware or allocations. [S12, S13]

Screening had 504 parser failures and 19 cap hits among 32,768 outputs. By design the selected initial groups had neither. Follow-up had ten parser failures and four cap hits among 1,536 outputs. Those quality counts do not certify semantic correctness. The primary denominator remains 64 regardless of later quality flags. Descriptive prefixes of eight, sixteen and twenty-four fresh draws yield 9/64, 10/64 and 11/64 parser events.

They are nested observations, not independent comparisons or evidence of an optimal rollout budget. [S1]

The Wilson interval uses a question-level binomial working model within the selected cohort. It is not design-based or population coverage: both outcome-dependent eligibility and fixed-order truncation restrict the estimand. The observed 87/4,096 eligibility count similarly describes this fixed screen, not benchmark-wide mathematical failure prevalence.

The first review solved the questions before comparing reference answers, then inspected the required model outputs. A second reference review was separately masked from the first judgments and model outputs. Final reconciliation compared the exact question, reference and annotations, retaining disagreements rather than forcing consensus. All stages were assistant-assisted. Separate masking and repeat review do not provide independent human validation or rule out shared model biases. [S2, S6]

The first output audit covers all 64 cases, all 512 initial responses and 143 required fresh responses: 655 responses in total, including all 38 primary-success outputs. The final mechanical coverage receipt verifies those identities and stored logic; it is not an independent mathematical adjudication. Six initially missing reasoning-caveat fields were clarified in a separately attributed supplement without altering the original fields, scores or verdicts. The final receipt records no unresolved defect under its mechanical coverage and required-field checks; that does not certify semantic correctness of every annotation. [S7]

For the eleven event questions, reconciliation read all 88 initial outputs and all 38 primary-success fresh outputs in full. All 126 explicit final-number extractions are faithful and uncapped. Two unit-sensitive non-events add sixteen inspected initial outputs. This is not a claim to have validated reasoning in every one of the 1,536 fresh responses. The first audit identified five frozen-v2 extraction false negatives and no extraction false positives within its reviewed set; these selected-case observations do not establish population parser precision. [S2, S3, S5, S7]

The conservative witness rule requires a reference value supported in both rounds without material ambiguity, eight faithful uncapped initial claims independently judged wrong, and at least one faithful uncapped fresh primary-success claim independently judged numerically correct. Sound final arithmetic and sound visible reasoning are recorded separately. No post-review filtering changes the 64-question denominator.

Appendix G keys the scientific sources. S12/S13 report the generation configuration and manifest without available exact-byte checksum bindings; their settings are reported provenance, not freshly verified bytes. Operational smoke provenance S10 is not a supplied scientific source. C1 remains distinct from the historical V2 diagnostic.


Chapter 5

Implementation Details

This chapter describes what was built. Its organising claim is that the engineering contribution of the project is a **dispatch and evidence layer** rather than a training algorithm: the algorithmic content of GRPO is inherited from the literature, but the work of making six reinforcement-learning frameworks and six compute backends addressable through one Tinker-style interface — and of recording the evidence needed to trace outputs to their configuration and artefacts, while marking incomplete historical bindings — is where the implementation effort sits. The chapter proceeds from the abstraction (the adapter architecture), through the concrete training loop, to the two engineering episodes that most shaped the codebase (the parallel logging defect and the Colab white-box path), and finally to the evaluation harness and the recovery re-implementations undertaken after an execution-source loss in the final phase of the project (Figure 5.1).

5.1 Two Rosters, One Dispatch Surface

A reader approaching the project's comparison material will encounter two different framework rosters, and conflating them is the single most likely misreading of the implementation. The internal reports' shared methods note states the distinction explicitly: the cross-launcher LLM-RL scaffold referenced in the framework-gap discussion is a seven-library roster — Tinker, TRL, SkyRL, veRL, OpenRLHF, Atropos, and HF reference launchers — that targets LLM post-training launchers specifically, while the cross-RL-library evidence reported elsewhere uses a different roster. Critically for this chapter, the same note records that "only Tinker and TRL produced completed runs in this release; veRL and OpenRLHF entries in the `framework_comparison.json` artefact are dry-run placeholders". The veRL and OpenRLHF entries in that artefact carry peak and last-ten-average reward values, but they are the output of the harness resolving a launch plan, not the output of a training run, and they must never be pooled with real

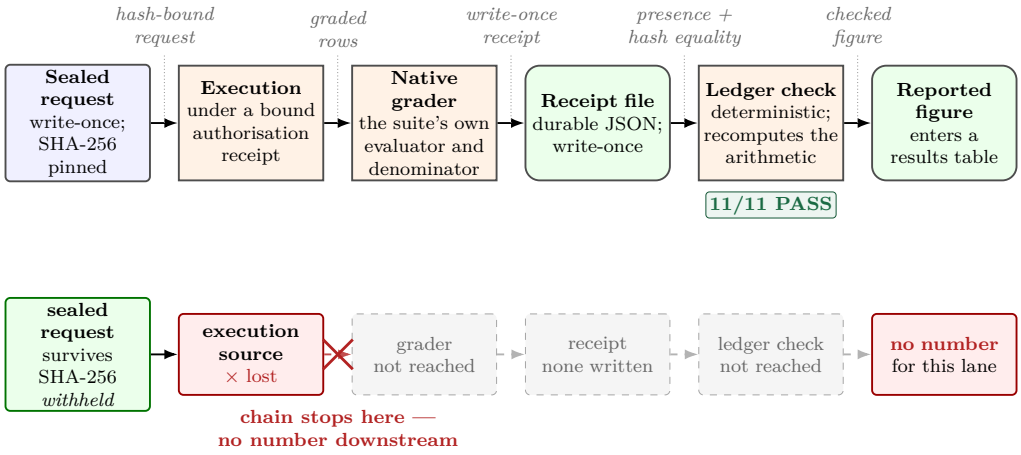

Example lane: the E1 wave-10 recovery (16 tasks) was sealed and locally validated, but the retained source record does not provide its execution source — so no number is reported for that lane.

Evidence boundary. A missing link prevents a fully execution-verified claim; it does not erase a separately labelled surviving score summary.
The chain is not repaired by inference. For this E1 recovery scope, the retained record establishes sealing and local validation but not execution, so no score is inferred.
E9 MLE-bench reports coverage of 40/75 (53.33%) while its suite score remains null. Coverage, source identity and scientific validity are distinct checks.

checks: `LEDGER_CODE_CHECK_2026-09-19.json` (11 of 11 PASS, 0 failed, schema `ledger-code-check-v1`)

Figure 5.1: The evidence chain from sealed request through execution and native grading to a deterministic ledger check. A break anywhere in the chain prevents promotion to a fully execution-verified result. Recovered summaries remain separately labelled with their limits. Upper row: the chain; the 11/11 PASS badge is the 2026-09-19 deterministic ledger check of eleven named claims, not of every figure (`LEDGER_CODE_CHECK_2026-09-19.json`). Lower row: the E1 wave-10 recovery, where the lost execution source stops the chain.


results or read as framework comparison evidence.

Atropos occupies a different position again. Rather than being a cell in the dispatch matrix, it is integrated through a dedicated package under `platform_tinker/atropos/`, a `tinker_atropos` module containing `config.py`, `api.py`, `trainer.py`, `types.py`, `dataset.py`, `stats_utils.py`, and an `environments/` directory with per-task environment servers. Its integration model is the Atropos managed-server pattern: a three-terminal workflow in which `run-api` starts the Atropos API, `launch_training.py --config configs/default.yaml` starts Tinker training against a `TINKER_API_KEY`, and an environment server — a built-in one or any external Atropos environment pointed at the same config file — serves rollouts. The README's quickstart example runs a fifty-step training run on Llama-3.1-8B-Instruct against a GSM8K environment, and the environment contract is that the `env` and `openai` sections are consumed by the environment server while the `tinker` section is consumed by the trainer and ignored by the environment. This separation is what allows an arbitrary existing Atropos environment to be reused against the Tinker backend without modification to the environment.

5.2 The Adapter Architecture: What versus Where

The dispatch surface is built on one orthogonal decomposition, stated in the backends module docstring: "A `Backend` knows **where** to run one experiment cell (local GPU, Modal, Colab, vast.ai, GCP, HF Spaces); the framework dimension (trl/tinker/verl/openrlhf/skyrl) is the **what**. `plan()` resolves a cell into a concrete `LaunchPlan` without spending compute, so `--dry-run` and the matrix test work uniformly". The `LaunchPlan` dataclass carries `backend`, `framework`, `command`, `driver_file`, `output`, `env`, and `notes`, with a `format()` method for printing; the default `_execute` runs `subprocess.run(plan.command, shell=True, check=True)`. Because plan resolution is separated from execution, the entire matrix can be validated without a GPU, an API key, or a dollar of spend — a property that the dry-run placeholders discussed above depend on, and which is also the reason those placeholders must be labelled as such (Figure 5.2).

The matrix itself ships as data. `platform_local/unified/matrix.json` declares schema `tinkerrl-framework-backend-matrix-v1` with thirty cells — five frameworks (trl, tinker, verl, openrlhf, skyrl) crossed with six backends (local, modal, colab, vast, gcp, hfspaces), five framework cells per backend and six backend cells per framework — and a `canonical_experiment` block that pins the single configuration every cell is meant to instantiate: `Qwen/Qwen3-8B` on GSM8K with GRPO, thirty training steps, `num_generations` 8, per-device batch size 2, gradient accumulation 8, learning

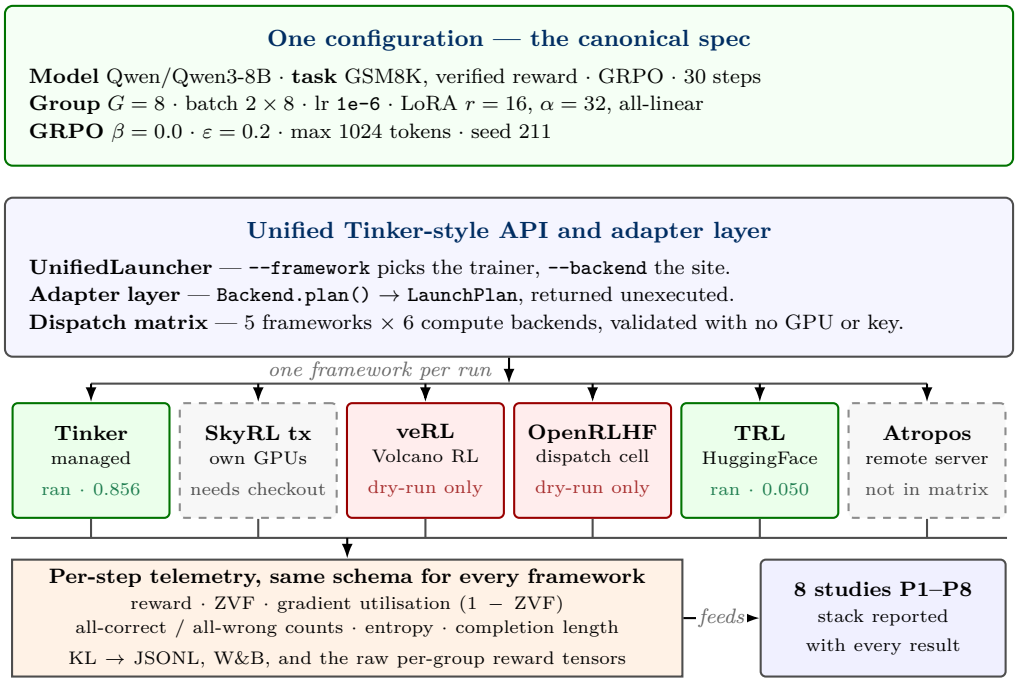

Six RL frameworks, five of them in the dispatch matrix; **two executed** (Tinker, TRL).
Box outline: green solid = completed run; red = dry-run placeholder; grey dashed = not executed.
Status and reward figures: `framework_comparison.json`, last-10 reward; Tinker: Qwen3-8B-Base, TRL: Qwen3-8B.
The two dry-run rows are launch-plan artefacts, not measurements, and are excluded from pooling.

Figure 5.2: Six RL frameworks behind one Tinker-style API. Five of the six are in the dispatch matrix (5 frameworks × 6 compute backends); only two executed (Tinker, TRL: last-10 mean training reward on Qwen/Qwen3-8B GSM8K, from `framework_comparison.json`), two are dry-run launch plans and two were not executed. One configuration drives every framework, but the executed comparison bundled a different base checkpoint (Chapter 7), so outcome differences are reported with the stack rather than attributed to it.

rate 1e-06, LoRA rank 16 and alpha 32 over all linear modules, beta 0.0, epsilon 0.2, maximum completion length 1024, and seed 211. Each cell is a concrete plan naming a framework, a backend, the launch command, the driver file and an output location; for example, the trl/local cell runs python -m platform_local.unified --backend local --framework trl and dispatches in-process to platform_local/trl_integrations/trainer.py.

The launcher implements the dispatch. UnifiedLauncher holds three registries: FRAMEWORKS mapping skyrl, tinker, verl, openrlhf, and trl to human-readable labels; BACKENDS mapping local, modal, colab, vast, gcp, and hfspaces to labels; and ALGORITHMS covering grpo, ppo, reinforce, dapo, and dpo. Dispatch is outer-on-backend and inner-on-framework, which is why the per-framework handlers can each be written against the framework's own idioms. _run_tinker shells to python -m platform_tinker.tinkerrl.grpo_cli --preset <spec.task>; _run_openrlhf delegates to platform_modal/openrlhf/trainer.py:run_openrlhf_training({}, output_dir="./checkpoints/openrlhf"), which drives openrlhf.cli.train_ppo_ray --advantage_estimator group_norm; _run_trl generates a resumable GRPO training script through trl_integrations.trainer.generate_trl_train_script into a temporary directory and executes it; _run_verl imports verl.config and verl.trainer directly; and _run_skyrl requires a SKYRL_CHECKOUT environment variable and emits uv run --extra gpu --extra tinker -m skyrl.tinker.api. For the local and colab backends the launcher runs dispatch_framework() in-process, a path the code comments identify as the one that breaks the Colab entry's self-recursion — an implementation detail worth recording because it indicates that the backend and framework dimensions are not perfectly orthogonal in practice, and the launcher carries framework-specific knowledge precisely at the points where they intersect.

Fairness across frameworks is addressed by configuration auditing rather than by assertion. The platform_hybrid/experiments/framework_config_dumps/ supplement ships one exact hyperparameter dump per framework for the canonical Qwen3-8B + GSM8K matched-configuration run, and the accompanying README recomputes the field partition from those dumps: of 44 tracked leaf fields, 25 are identical across all four frameworks (LoRA rank, alpha, target modules and dropout; GRPO group size, rollouts per group and max new tokens; sampling temperature, top-p, top-k and do-sample; optimizer name, learning rate, weight decay, betas and epsilon; reward type; and the task, seed and source-git-sha metadata), while 11 are Tinker-managed — serialised as null # managed_by_tinker in the Tinker dump — covering kl.beta, kl.surrogate, importance-sampling granularity, reference-model offload and recompute, tokens per optimizer step, reward broadcast precision, gradient checkpointing, micro-batch size,

gradient accumulation, and tensor-parallel size. The same README records two disclaimers that matter more than the identical count: `model` and `model_sha256` are *not* identical, because the Tinker run uses `Qwen/Qwen3-8B-Base` while TRL, veRL and OpenRLHF use the instruction-tuned `Qwen/Qwen3-8B`, and `model_sha256` is a placeholder rather than a verified checksum. Remaining fields are framework-specific and documented rather than harmonised — KL beta is 0.04 for TRL and veRL against 0.02 for OpenRLHF, importance-sampling granularity is token-level for TRL and veRL against sequence-level for OpenRLHF, and reference-model placement differs across all four (`on_device`, `managed`, `separate_process`, and `sharded_ray`). The appendix's original "byte-identical" framing is retracted on the strength of this partition; the accurate statement is that a majority of tracked fields are matched, a known Base-versus-Instruct confound survives, and eleven fields are not under user control at the Tinker API level at all.

5.3 The Tinker GRPO Loop

The reference implementation of the training loop lives in `platform_tinker/tinker rl/grpo.py` and is exposed through `grpo_cli.py`. The loop follows the standard four-stage shape recorded in the Phase-1 report under "The Tinker GRPO Loop": sample a group of `G` completions per prompt, compute group-relative advantages, form the loss, and take an optimiser step. By default, `normalize_rewards` centres rewards within each group and divides by the population σ plus $\varepsilon = 10^{-8}$. Nondegenerate groups therefore have approximately unit standard deviation; homogeneous groups return zero. With `unbiased=True`, the helper centres without dividing by σ. The primary custom-loss term is not the clipped, KL-regularised surrogate of the original GRPO paper. It is an advantage-weighted log-probability objective with a group-mean baseline,

$$L(\theta) = -\frac{1}{N} \sum_{i} A_i \sum_{t} \log \pi_\theta(y_{i,t} \mid x, y_{i,<t})$$

averaged over the N completions in the batch, with no importance ratio, clipping or KL penalty in that primary term. `make_grpo_loss_fn` also supports an optional token-mean NLL term over selected nonempty responses; its returned `grpo_loss` metric includes that term when enabled. The separate GSPO and critic-enabled paths have different contracts. The sampler is refreshed only at checkpoint boundaries (every `save_every` steps), so rollouts between refreshes come from slightly stale weights with no importance correction. The implementation uses the Tinker SDK's `ServiceClient` with `create_lora_training_client`, `forward_backward_custom` with `loss_t ype_input="logprobs"` so that per-token log-probabilities flow into a custom loss,

optim_step with AdamParams, and sample() for rollouts; resumption uses create_training_client_from_state_with_optimizer.

The single most consequential property of this loop for the project's research questions is the degenerate case. When the group's reward standard deviation σ_g is zero, the default group-centred advantages are zero and its reward-relative term supplies zero gradient. An enabled auxiliary NLL term can still supply a gradient; other objectives and optimiser state must be considered separately. This is the mechanism behind the zero-variance-fraction diagnostic that runs through the project; it is recorded in the Phase-1 report as the observation that motivated the collapse analysis, and it is the reason zero_loss and zero_reward are first-class outputs of the training CLI rather than derived quantities. Zero reward is counted as an average reward equal to zero; zero loss is counted when the absolute step loss is below 1e-6. A small scalar loss does not itself establish a small gradient.

The CLI exposes eight presets — tooluse_synth, tooluse_baseline, tooluse_heldout, tooluse_xlam, gsm8k, math100, pavlov_xlam, and pavlov_portfolio — each resolving a dataset factory and a reward function through a DATASET_FACTORIES registry and a REWARD_MAP (ExactMathReward for GSM8K, StrictToolCallReward for pavlov_xlam, PavlovNonXLAMReward for pavlov_portfolio). Tracking and campaign gates are enforced before a run starts, through config.validate_tracking() and config.validate_campaign_gate(), and the CLI refuses to launch without a TINKER_API_KEY. Each seed's result is printed as a structured record containing run_id, sampler, avg_first5, avg_last10, peak_reward, zero_loss, zero_reward, heldout_reward, and reward_trace, so that a run's evidence is emitted at the point of execution rather than reconstructed afterwards. The eight presets replaced an earlier collection of standalone grpo_*.py scripts, with legacy_main retained to translate the old flag surface.

5.4 The Parallel Runner and a Real Logging Defect

Sweep execution is handled by parallel_sweep.py and campaign.py, with the runner's design shaped directly by a defect found during development. The defect is documented in the group-size sweep findings and is worth quoting in full, because it is the clearest illustration in the project of why logging infrastructure deserves the same scrutiny as training code:

> The threaded runner trains all G in parallel correctly, BUT wandb uses a thread-unsafe global run — with 4 threads calling wandb.init(reinit=True), the G8/G16 **summary** writes failed ("Run

is finished") after another thread finished its run. Per-step `wandb.log` mostly survived; the summary dict didn't. **Fix for next parallel batch:** isolate each run in its own PROCESS (multiprocessing / subprocess per config), not a thread — or use `wandb-core` service mode with explicit per-run objects. Training itself was unaffected (all step data is in the run log).

Two aspects of this record are instructive. First, the retained findings report that training and per-step logging continued while summary writes failed. That report is not an independent gradient-correctness check. Only the run summary — the aggregated dictionary from which a results table would be built — was lost, which is precisely the class of failure that corrupts downstream reporting while leaving the primary artefact intact. Second, `campaign.py` implements a separate process per configuration, while the older `parallel_sweep.py` retains its threaded implementation. Process isolation avoids sharing that in-process logging state across configurations; retrying the original summary write alone would not remove the race. The finding also notes the alternative of `wandb-core` service mode with explicit per-run objects, which would preserve in-process execution at the cost of depending on service-mode semantics that the project chose not to rely on.

The same findings file documents the group-size sweep that exposed the defect, and its numbers are reported here with the qualifications the source attaches to them. The sweep ran $G \in \{2, 4, 8, 16\}$ on Qwen3.5-4B for six steps on GSM8K at seed 0 under the W&B group `p3-groupsize-sweep`, with total token counts of 9,663, 19,964, 34,084, and 68,055 respectively. At $G = 2$ the run showed a 50% batch-level collapse with a `+0.000` gain; at $G = 4$ a 17% collapse with a `+0.125` gain. The source flags the $G = 4$ gain explicitly as supported by one example at $n = 8$ on a single seed and therefore *suggestive rather than proven*, and records that the independent verification of the sweep returned the verdict SUSPECT. These are not results this thesis claims; they are the observations that motivated the group-size investigation and that the later controlled work supersedes, and they are reported in the register in which they were recorded.

5.5 The Colab White-Box Path (Per-Layer Gradient Profile)

The per-layer gradient profile — numbered P1 in the Phase-1 series, and distinct from the P1 cross-scale study of Chapter 6 — asks a question the managed Tinker backend cannot answer. Per-layer gradient norms require access to the model's internals during

the backward pass, and the managed service exposes no such interface. The implementation therefore leaves the managed path entirely and runs on a Colab L4 GPU in `platform_hybrid/experiments/openings/p1_layer_profile.py`, using Qwen2.5-1.5B-Instruct with LoRA adapters on the q/k/v/o projections, five GRPO-style advantage-weighted steps, and per-layer LoRA gradient norms recorded at each step. The white-box path is thus a deliberate architectural exception: the project accepts the loss of managed-scale training in exchange for gradient visibility, and confines the exception to a question that only gradient visibility can address.

The first-pass result appeared strong. Across 28 layers, the top-k layer set identified at step 1 overlapped the final top-k set perfectly, with a measured overlap of 1.0; the top 25% of layers accounted for a 0.476 share of gradient mass; layer 0 carried a gradient norm of 63 against 6–17 elsewhere, and a secondary mid-late band appeared at layers 17–23. A scaled re-test disciplined this result. The re-run used `p1_layer_profile_scaled.py` on Qwen2.5-3B-Instruct, with 24 real GSM8K problems, ten steps, `G = 4`, 36 layers, and seeds {0, 1}. The stored step-1 overlap fell to 0.111, and the top-25% concentration measured 0.39 with a standard deviation of 0.013. The source's verdict is unambiguous: the original predictability finding "was an artifact of the toy 1.5B/hardcoded-arithmetic setup". A later four-seed pass at the same configuration (seeds {0, 1, 2, 3}) supersedes the two-seed figure and gives a mean overlap of 0.083 ± 0.048 (mean ± SD), with concentration 0.39. The implementation compares the top nine of 36 layers at step 1 with the top nine by gradient norm summed over all ten steps, including step 1; it does not compare with an independent final-step target. For two independent uniformly selected nine-layer sets, expected intersection divided by nine is 9/36 = 0.25, so describing 0.111 or 0.083 as the chance expectation was incorrect. The observed overlap is below that simple reference, without establishing a general anticorrelation or a statistically calibrated null.

A companion freeze test asked whether the layer profile could be exploited: if a small band of layers dominates the gradient, freezing the rest should preserve the benefit at lower cost. It did not. The full 28-layer configuration trained 2.18M parameters and produced a mean held-out gain of `+0.0625` (seed 0 `+0.125`, seed 1 0.0). Freezing to a hot band comprising layer 0 plus layers 12–27 — 17 layers, 1.32M parameters, or 0.61 times the full count — produced `+0.000`. The source concludes that "aggressive freezing loses the benefit… The freeze lever does not work at this scale", and records that the comparison is underpowered at n = 8 held-out examples over 2 seeds. Both P1 outcomes are negatives: the apparent structure did not survive scaling, and the intervention it suggested did not survive testing. They are reported as findings rather than suppressed, because a layer-importance claim that collapses under a scaled re-test is exactly the kind of result the project's evidence discipline exists to surface.

5.6 Software Modules

The module inventory recorded in the Phase-1 report remains the accurate map of the codebase. The unified launcher, `platform_local/unified/launcher.py`, maps one configuration onto a chosen backend; `platform_tinker/tinkerrl/grpo.py` is the reference GRPO loop against the managed backend; `platform_local/trl_integrations/` and the `verl/` integration hold the per-framework adapters, with `platform_modal/openrlhf/` and `platform_hybrid/skyrl/` completing the roster, and `platform_tinker/atropos/` carrying the Atropos integration described above. Analysis code is separated from training code by intent: `p2_collapse_analysis.py` recomputes zero-variance fraction and collapse statistics from stored reward tensors, so the diagnostic is reproducible from evidence rather than from a live run; `p1_layer_profile.py` implements the white-box gradient probe; `parallel_sweep.py` and `campaign.py` drive sweeps; and `p8_detector.py` is an exploratory method-trace classifier evaluated by row-wise cross-validated AUROC.

The p8 detector deserves an explicit caveat in an implementation chapter. It is an exploratory artefact evaluated by row-wise cross-validation, and its AUROC is a measure of separability on the traces it was given, not a benchmark result against an external suite; it should not be read alongside the E-lane scores reported later in this thesis. Beyond these modules, the `platform_local/unified/` package carries `canonical.py` for the canonical configuration and `peft_utils.py` for adapter handling, and the backends package implements one module per backend (`local.py`, `modal.py`, `colab.py`, `vast.py`, `gcp.py`, `hfspaces.py`) behind the common `base.py` interface.

5.7 The E1–E14 Evaluation Harness

Evaluation is governed by a completion gate, `zvf-program/flagship/e1_e14_completion_gate.py`, schema `e1-e14-completion-gate-v1`. The gate maintains five evidence classes — `COMPLETE_EXACT`, `PARTIAL_EXACT`, `PARTIAL_RECOVERY`, `BLOCKED_EXTERNAL`, and `LOCAL_SETUP_READY_PROVIDER_INPUT_REQUIRED` — and maps lane source statuses onto them, with unknown states failing closed rather than defaulting to a classification. Its `LANE_SPECS` table binds each lane to a replacement scope, a task count, and the runner or adapter that produces its evidence: E2 FrontierSWE at 17 tasks (`pavlov_frontier_swe_eval_adapter.py`, `frontier_swe_eval.py`), E3 SDAB at 80, E4 BankerToolBench at 100 (`run_harbor_via_tinker_bridge.py`), E5 APEX-Agents at 480, E7 BinaryAudit at 46 (`modal_non_e11_readiness.py`), E9 MLE-bench at 75 (`e9_mle_bench_streaming.py`), E12 AppBench at 6, and lanes E6, E8, E10, E13 and E14 with their respective runners. The gate's own header states

its scope precisely: it neither invokes an adapter nor accepts a package as a benchmark result (Figure 5.3).

The results the gate classifies are recorded in `outputs/E1_E14_FINAL_RESULTS_2026-09-19.md`, verified by eleven named deterministic checks on 2026-09-19 (scope in Appendix B) and bound to surviving receipts. The single Tinker-trained actor is base `Qwen/Qwen3.6-35B-A3B` at commit `995ad96e…` with adapter `campaign-adapter` at commit `withheld-adapter-revision…`, in bfloat16. The document's opening constraint governs how everything below may be read: original-contract and replacement-scope numbers are never pooled, and per the project evidence rule no cross-suite average is formed at any point.

The per-lane results the gate classified are reported once, in Chapter 8 (Tables 8.A–8.C), with each lane's scope and terminal state in Table C.3; they are not repeated here.

One further result from this phase belongs in the implementation record because of what it demonstrates about the harness. Under separate authorization, the E4 BankerToolBench suite was re-run from scratch on the base model through the Modal bridge's `/v1/responses` path at `--n-concurrent 2`. All 100 of 100 trials completed, with one `NonZeroAgentExitCodeError`, and the mean reward was 0.0 — every trial in the zero bucket. The earlier report attributes the mechanism to agents terminating after 2–14 steps (median about 6) without producing output in `deliverables/`, causing the verifier to short-circuit to zero on a "No deliverables found" condition, and that 27 or more trajectories ended in role-token degeneration of the form `user user assistant …` repeated. This bridge path set no stop sequences, a plausible contributor to the documented degeneration, but the available comparison does not identify the bridge contribution to the aggregate zero (Section 8.5). The retained report records 3h29m elapsed, 16.35M prompt tokens and 2.18M completion tokens. Reporting a mean reward of 0.0 with its mechanism attached, rather than reporting a low score and moving on, is the standard this chapter's evidence rules are meant to enforce.

5.8 The Bridge and Sampler Path

Runners reach a Tinker-trained model through `zvf-program/flagship/modal_tinker_openai_bridge.py`, a Modal-deployed OpenAI-compatible bridge whose own header states that "the deployed bridge is infrastructure, not a benchmark result. Its default paid-inference budget is zero". The bridge declares app name `campaign-serving-bridge`, model alias `campaign-actor` over model id `Qwen/Qwen3.6-35B-A3B`, and pins its sampler at [operational identifier withheld], with the Hugging Face side pinned by commit `withheld-adapter-revision`. Runtime

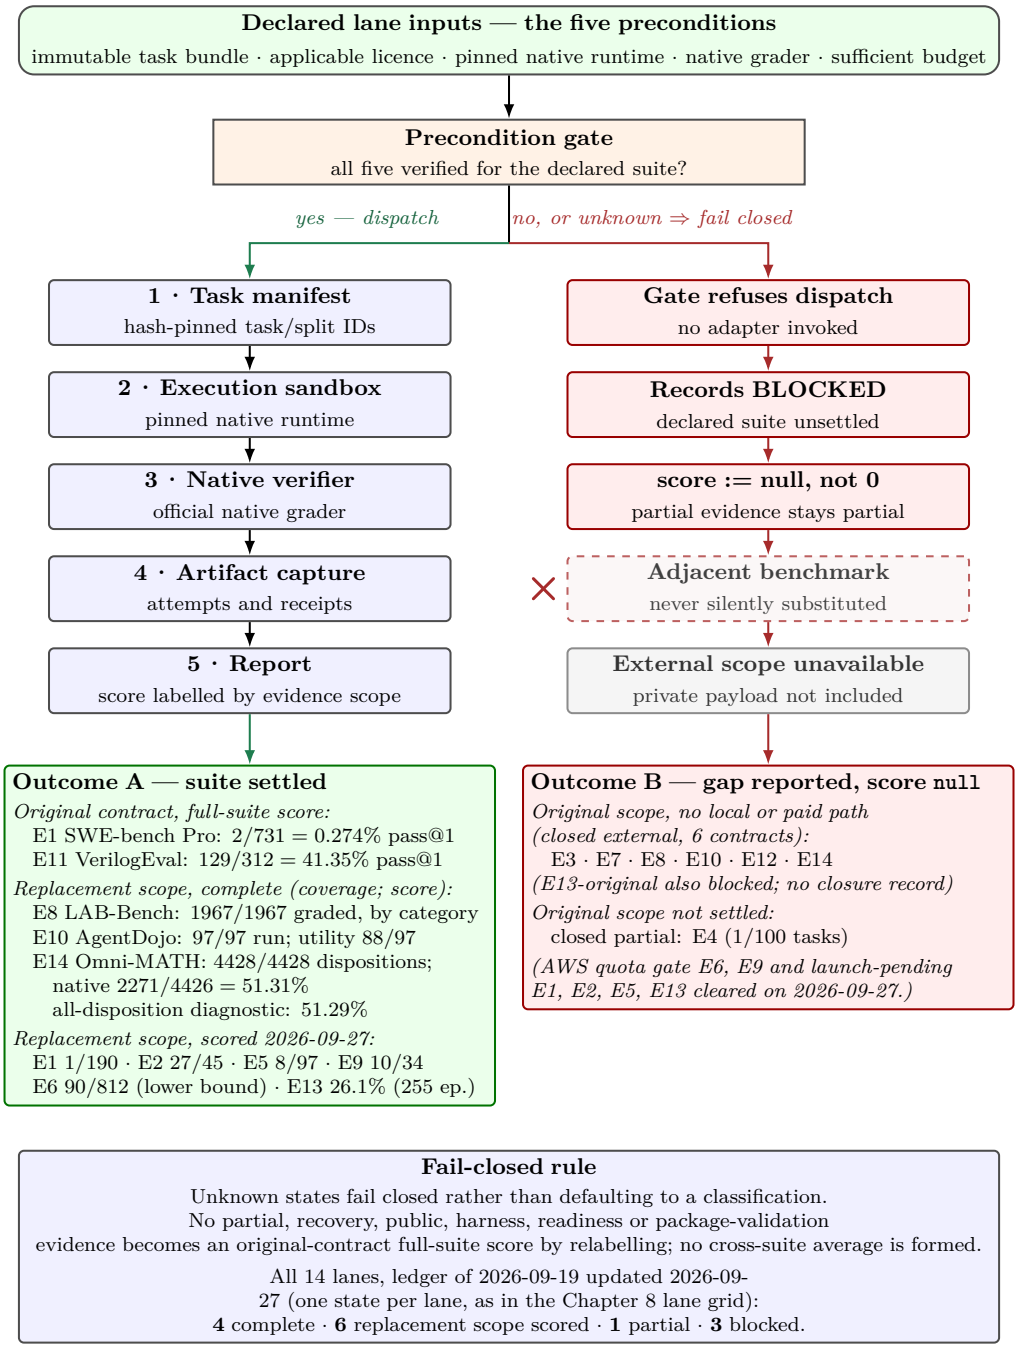


Figure 5.3: Evaluation harness design. The prescribed fail-closed rule is that when a precondition cannot be satisfied the lane records BLOCKED rather than silently substituting an adjacent benchmark; later protocol departures are disclosed in Chapter 8. Outcomes and the lane tally are taken from the 2026-09-19 ledger of record (`Pending_Experiments.md`), updated with the six replacement scopes scored on 2026-09-27. Outcome A separates original-contract scores from replacement-scope results and gives coverage and score separately; Outcome B lists original-scope suites that are closed external, then the one lane whose scope is not settled. E14's native accepted-set accuracy is 2271/4426 = 51.31%. The separate all-disposition diagnostic is 2271/4428 = 51.29%, counting the two unjudged rows as failures.All actor-dependent figures are stored-evidence end-to-end harness scores, not replayed and not capability measures (Chapter 8 gives failure-mode rates).

limits are 16,384 maximum completion tokens against a 65,536-token model context, with an 8,192-token context prefix reserved; `DEFAULT_MAX_USD` is `Decimal("0.00")`, so every paid path must be opted into explicitly at launch. The pinned dependency set is `fastapi` 0.116.1, `huggingface-hub` 1.27.0, `tinker` 0.30.0, `transformers` 5.5.4, and `wandb` 0.21.0.

The architectural point of the bridge is that it converts a Tinker sampler into an OpenAI-compatible endpoint. A harness written against the OpenAI chat-completions API — which most agentic benchmark harnesses are — can therefore be pointed at a Tinker-trained actor without modification, and the E4 rerun described above used exactly this path in its `/v1/responses` form. The same pattern appears in the actor-side configuration of the E1 recovery wave, where the actor is addressed as an OpenAI-compatible chat-completions service at `http://127.0.0.1:18015/v1` (container port 8000) under model name `campaign-actor-bf16`, with `max_tokens` 8192, temperature 0, seed 809, top-p 0.95, and `chat_template_kwargs {"enable_thinking": false}`. The bridge and the local actor endpoint are two deployments of the same interface contract, and keeping that contract stable across deployment modes is what allows one harness to serve both.

5.9 Recovery Re-implementations under `zvf-program/`

In the final phase of the project an execution-source loss — deletion of the historical temporary execution workspace directory — removed the finish-era recovery and build code, confined in scope to the E1 wave10 controller, the E9 restored dependencies, and the E6 validator, while the replacement-lane native runners survived under `zvf-program/flagship/`. The project's lost-source policy is that sealed requests, validation receipts and test logs pin any faithful re-implementation. Four such re-implementations are worth describing, because together they show what the evidence discipline looks like when it is expressed as code rather than as convention. None of them produced a benchmark number; their value is that their safety properties are testable offline.

The four recovery re-implementations.

Table 5.1: The four recovery re-implementations. Schedule offsets, hashes, reservation identifiers and HMAC domain strings are recorded in the cited source files rather than repeated here.

Artefact	Scope	Safety properties enforced in code	Offline tests	Status
E1 wave10 (`zvf-program/e1_wave10/`)	Rebuilds the sealed v6 controller for 16 SWE-bench Multilingual tasks (9 gson, 5 terraform, 2 immutable-js)	Acts only on the sealed request hash and its embedded task list; requests built only through the lane's native request builder; v6 process-group contract with unconditional finalisation; `GENERATION_FAILED` reserved for completed responses without a valid diff; write-once receipts; no retry, resume or replay	10/10 (`test_process_group.py` 4/4, `test_cleanup_regressions.py` 6/6), matching the lost suite	Reservation recorded `RESERVED_NOT_DISPATCHED`
E2 driver (`zvf-program/e2_core/driver.py`)	Schedules the CORE-Bench target-helper GPU chain on GCP (one `n1-standard-4` with a T4)	Validation-only by default; refuses `--execute` without the required execution-readiness evidence; exact early deletes; no retry	12/12 (schedule arithmetic, deletes, cutoff, `UNVERIFIED/LATE` reporting, IAM gate)	Unexecuted design artifact
E5 successor27 (`zvf-program/e5_successor27/controller.py`)	Rebuilds the expired sealed packet for 27 never-started Tau3 banking tasks (97 in scope)	Pinned model revision and fresh run identifiers, with the earlier namespace barred; concurrency 3; fixed host, actor and dispatch deadlines; offline `verify`, `plan` and `gate` subcommands	52/52; `verify` and `plan` return `PLAN_READY_NOT_EXECUTED`, `gate` and `launch` refuse	Needs a bound authorisation receipt and a native runtime adapter
E13 supervisor (`zvf-program/e13_balrog/hosted_supervisor.py`)	Hosted supervisor for the BALROG lane; design artefact, not deployed	Absolute deadline D = t0 + 3600 s that is never rebased; short HMAC-authenticated leases that reject replays; renewal and receipt signatures in separate domains; live execution unimplemented and guarded by `NeverExecutedError`	17/17	Not deployed

Sources: zvf-program/e1_wave10/README.md; zvf-program/e2_core/driver.py; zvf-program/e5_successor27/controller.py; zvf-program/e13_balrog/hosted_supervisor.py; outputs/E1_E14_FINAL_RESULTS_2026-09-19.md.

The companion E2 `launch_gate.py` is deliberately trivial: it checks only that the

amendment acceptance record and the surviving CORE-Bench harness entry points exist, which keeps the gate's claim small enough to be true.

Read together, these four artefacts are the implementation answer to a question the results chapters raise: how a project maintains evidential integrity when its execution environment is partly lost and partly unreachable. The answer taken here is to re-derive the controllers from the sealed requests and the surviving test records, to keep every re-implementation offline-testable, and to make the no-retry, no-replay, hash-pinned, fail-closed properties explicit in code so that they can be demonstrated rather than asserted. The cost of that discipline is visible: four controllers, three of them complete and one a deliberate stub, produced no new benchmark numbers in this phase. That is the intended trade.

None of the four controllers ran the lanes in the end. On 27 September 2026 a single lead authorisation superseded the sealed-reservation and owner-binding gates they enforce, and each lane was run with a thin runner that calls the benchmark's native loop and grader directly. The runners live under `outputs/finish_pending_2026-09-27/<lane>/code/`, and each lane's `result.json` lists the bypass as a deviation (§8.4). These fail-closed properties describe holding the lanes, not measuring them.

Part III

Results

Chapter 6

Results I: Core GRPO Studies (P1–P4)

> **Reading tier (19 October 2026).** Saturated contrasts in this chapter are pilot/feasibility evidence only. P2 is *instrumentation*, not a validated prognostic diagnostic; its mixed-pool correlations are quarantined in §6.3.4. Loss-form labels follow the Chapter 1 terminology box (clipped-GRPO / REINFORCE group-mean / unknown).

This chapter reports the four core GRPO studies that make up the first half of the P1–P8 internal reports: the cross-library and cross-scale behaviour of GRPO training reward (P1), the Zero-Variance Fraction as a diagnostic of signal starvation (P2), the effect of group size on trainability (P3), and the length-bias and held-out-generalisation behaviour of GRPO against its Dr. GRPO variant (P4). Each study is reported here in the form the evidence supports, which in every case is more conservative than the hypothesis that motivated it. Three of the four pillars return a negative or an explicitly bounded result, and the fourth returns a diagnostic whose incremental predictive validity on a separately identified measured cohort remains unestablished (Figure 6.1).

6.1 Scope, Sources and Evidence Boundary

The four pillars share one methodological commitment, which is the organising principle of the whole project: each comparison names the intended contrast, the controls actually held fixed and any coupled changes that limit attribution. Where checkpoint, prompt exposure, sampling or budget differ, the result describes those executed configurations rather than an isolated algorithm effect. The reader should treat this chapter as the primary result surface for P1–P4; the corresponding historical LaTeX sources are preserved, while this chapter distinguishes their reported outputs from corrections recomputed from the named data and inspected analysis code.

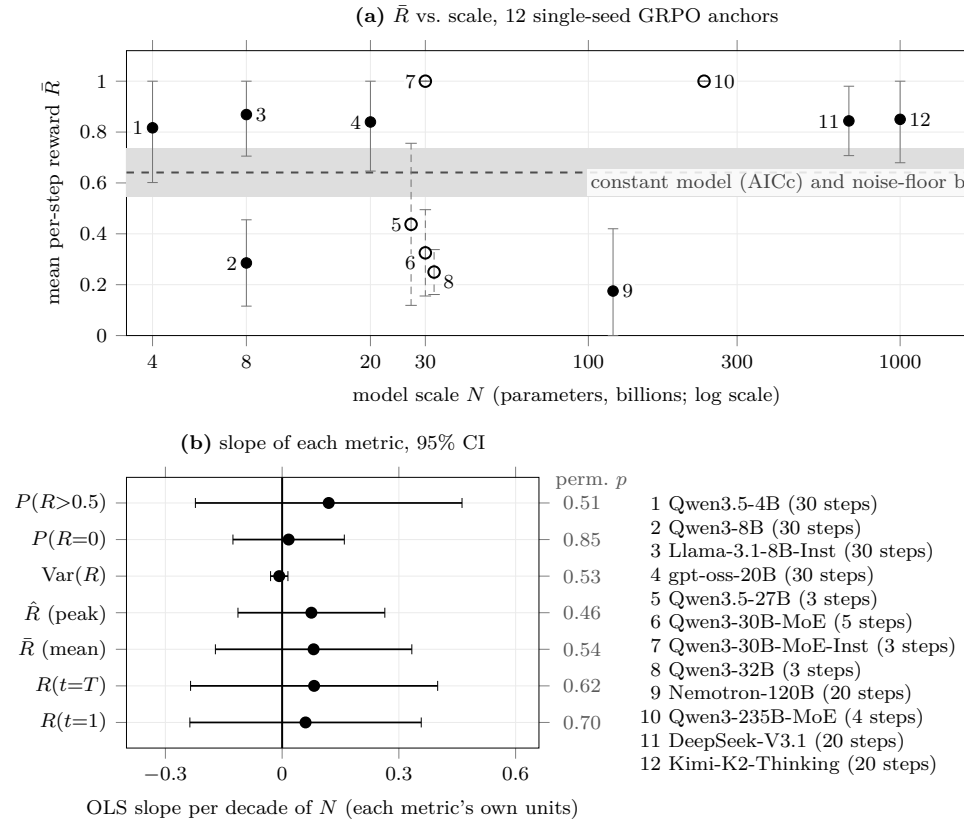


Figure 6.1: Cross-scale behaviour of reward across the studied model range: no reliable monotone scaling trend is recovered. (a) Twelve GRPO anchors from 4B to 1T parameters, one seed each, listed in the key with their number of logged steps. $\bar{R}$ is the mean over a run's logged steps of the per-step training reward (the fraction of rollouts rewarded, on a 0–1 scale; no further normalisation). Whiskers are ±1 SD of the per-step reward within the run, clipped to $[0, 1]$; they describe step-to-step noise, not a confidence interval. Open markers have fewer than ten logged steps. The dashed line and grey band are the constant model selected by AICc (pooled mean 0.641) and the $\pm\sigma_{\text{step}}$ noise floor (0.096). OLS slope +0.081 ± 0.129 per decade ($R^2 = 0.038$, permutation $p = 0.54$); Spearman $\rho(\log_{10} N, \bar{R}) = +0.149$ ($p = 0.64$). (b) OLS slope per decade of N for seven summary metrics, with 95% CIs (±1.96 SE) and permutation p over the twelve anchors. Each slope is in its own metric's units (reward, squared reward or probability), so slopes are not comparable across rows; every interval includes zero. Sources: experiments/results/scaling_law_extended_frontier.tsv and scaling_law_power_law.tsv.

Each study draws on a different evidence base, and the differences matter. P1 pools 70+ runs across seven reinforcement-learning libraries and five model families spanning 0.6B to 1T parameters, but the frontier-scale anchors within that pool are single-seed runs executed through a managed training and inference API, so the cross-scale analysis is descriptive and its uncertainty is wide. P2's measured magnitudes come from a controlled five-seed panel plus a matched-budget rollout budget check; a portion of its comparative table is a declared simulation projection rather than a set of independent library deployments, and that distinction is preserved below. P3's measured sweep covers $G \in \{2, 4, 8, 16\}$; every G = 32 and above number in the pillar is a joint-fit reconstruction, not a trained arm. P4's controlled comparison is sixteen runs across two algorithms and two tasks; its roster-level audit is drawn from a separate, larger pool that mixes models, tasks and libraries.

The corpus-level motivation for the fixed-stack commitment (Chapter 4 §4.1) is a variance decomposition computed as four separate marginal one-way ANOVAs, each run against the same 42 experiments with valid performance observations: library/framework $\eta^2 = 0.546$, training algorithm $\eta^2 = 0.558$, model family $\eta^2 = 0.471$, model scale $\eta^2 = 0.322$. These four values sum to 1.897. A set of shares that sums above one is not a partition of a common variance budget, and on a corpus where the factors are collinear a marginal η^2 absorbs the variance of each factor's correlates, so the values show that framework and algorithm vary a great deal across this corpus and do not estimate either factor's independent contribution. The historical twenty-test multiple-comparison family that accompanies the decomposition silently includes single-seed rows whose Welch statistics are mathematically undefined, and reduces to a single surviving comparison under the restricted family; it is retained as a reproducibility audit trail and not as a corrected survival claim.

Throughout this chapter, "statistically indistinguishable" means that the stated difference test did not detect a difference at its declared level; it does not mean demonstrated equivalence. Equivalence is reported only when both one-sided tests reject differences outside a stated margin. Failure to establish equivalence and failure to detect a difference are separate outcomes, and can occur together.

6.2 P1 — Cross-Library and Cross-Scale GRPO Behaviour

The question P1 sets out to answer is whether the benefit of GRPO post-training scales with model size. The framing is deliberate: the hypothesis of interest is a Chinchilla-style power law in parameter count N, and the P1 report's declared claim boundary is that

it reports a descriptive limits and identifiability audit rather than a positive scaling law. The short answer is that no reliable scaling law is recovered from the reward curves, and that the evidence base is too small and too heterogeneous to falsify a plausible scaling hypothesis even if one were present.

6.2.1 The anchor pool and the fitted saturation forms

The fitted anchor pool spans roughly 2.4 orders of magnitude in parameter count. This is a subset of the full 0.6B–1T roster: for the cross-scale fits, only anchors with a usable per-step reward trace and a known parameter count were retained. Two properties of that pool limit what the fits can support, and both are stated here rather than left to the reader. First, the anchors are not measured on a common footing: five of the twelve are interrupted runs whose recorded values are means over three to five logged steps, against twenty to thirty for the remaining seven, so the dependent variable is a short-horizon snapshot for part of the pool. Second, scale is collinear with training recipe across these anchors rather than independent of it: the learning rate, LoRA rank and related settings change together and only at the scale boundary, so a fit through the pool cannot separate an absent scale effect from recipe changes offsetting scale changes. The null reported below is therefore a statement about this pool as configured, and not an estimate of how reward scales with parameter count in general. The frontier-scale anchors — Qwen3-235B-MoE, DeepSeek-V3.1 at the 685B class, Kimi-K2 at 1T, and Nemotron-120B — were obtained through the Tinker managed training and inference API in a single-seed, descriptive-only regime, because this project accessed them through the managed service rather than operating their full base weights on its own hardware.

Each trace was fitted with a saturating-exponential form $R(t) = R_{\max}(1 - e^{-\lambda t})$, with the saturation rate λ constrained by the optimiser to the interval [0, 10]. The fitted results are the first place the negative result becomes visible. Across the five characterised anchors, the ordinary-least-squares trend slope on the raw reward trace, β_OLS, satisfies $|\beta\text{_OLS}| \leq 0.0037$ in every case — that is, the traces are flat to within a few thousandths of a reward unit per step. Qwen3.5-4B fits a mean reward of 0.817 with a peak of 1.000 and λ pinned at the bound of 10.0; Qwen3-8B fits 0.285 with a peak of 0.625; Llama-3.1-8B-Instruct fits 0.869 with a peak of 1.000; DeepSeek-V3.1 fits 0.844 with a peak of 1.000. Four of these five traces have λ pinned at the fit boundary — that is, the optimiser wanted a faster saturation than the constraint permitted — and the P1 report's verdict is that for those traces no single saturation exponent is identifiable at all.

The exception is Nemotron-120B, which fits $R_{\max} = 0.182$ with $\lambda = 0.99$, well inside the bound, and which the pipeline classifies as a collapse rather than a saturation. The autopsy table records a peak at step 3, an observed peak reward of 0.875, a late-phase

mean $\bar{R}$_late of 0.208, a drop of −0.667 from peak to late phase, a zero-reward step fraction of 0.55, and a post-peak OLS slope of −0.0036 per step. Across the rest of the pool, the zero-reward step fraction is at most 0.067. The Nemotron run is therefore better described as a distinct collapse phase than as a point on a smooth trend, and this is the reason the pillar's headline object is a local, stack-conditioned taxonomy of endpoint ceilings rather than a functional form in N.

6.2.2 The cross-scale test and its nulls

Three cross-scale statistics were computed against $\log_{10}$ N: the slope of the mean reward, the slope of the peak reward, and the slope of the reward variance. None is distinguishable from zero. The mean-reward slope is −0.024 per decade with a bootstrap mean of −0.117 and a 95% interval of [−0.796, +0.313], Spearman $\rho = -0.07$ (a later statistical audit, `results/berkeley/adding_error_bars_summary.json`, re-bootstraps the same anchors to a slope of −0.023 and [−0.796, +0.323]; neither interval excludes zero); the peak-reward slope is +0.037 with a bootstrap mean of −0.010 and an interval of [−0.623, +0.197], $\rho = +0.22$; the variance slope is −0.002 with an interval of [−0.063, +0.027], $\rho = -0.14$. A residual-resampling bootstrap with 1,000 draws applied to the Nemotron anchor returns $\bar{R}$_max = 0.310, $\bar{\lambda} = 3.26$, P($\lambda \geq 9.5$) = 0.277 and a t_{80} of 17.87 steps with an interval of [0.16, 161.4] — an interval wide enough to contain almost any behavioural claim. A 70/30 temporal holdout within each anchor returned test-RMSE improvements over a constant training-mean predictor of +0.0000, +0.0000, −0.0000, −0.0000 and +0.0016 across the five anchors. Fitting a power law over the full twelve-anchor set from 4B to 1T returns $p \geq 0.46$ for every exponent tested.

Two model-selection checks were run to see whether the saturation story was at least the best available description of the traces. Fitting constant, linear and saturating forms to each trace, AIC and BIC select the constant model on every single trace, with a ΔAIC of at most 2 over the runner-up. That is, a flat line describes these reward curves at least as well as any saturating curve does. A changepoint test with a permutation null estimated change locations $\hat{\tau}$ of 27, 28, 5, 15 and 18 steps across five traces, with permutation p-values of 0.493, 0.789, 0.742, 0.909 and 0.137; none is significant. An effective-plateau-horizon analysis at tolerance $\varepsilon = 0.20$ found that only two of the five traces — Qwen3.5-4B and Llama-3.1-8B-Instruct — reach a horizon at all, both at 27 steps, because the others never satisfy the tolerance.

The source reports a compute-adjusted proxy slope of +482 ± 490 per decade. Its proxy is parameter count multiplied by estimated steps to saturation, $N\,t_{80}$; per-step token counts were unavailable, so it is not a measured token or FLOP budget. The ± term is described as a wide interval in the source but its precise construction is not specified

in that paragraph. With four saturation-bound traces, the source regards the proxy as uninformative, and this thesis does not use it to make a compute-scaling claim.

6.2.3 Where the geometric template fails

The three-phase learning template used throughout the project — a slow start, a period of rapid improvement, and a plateau, with collapse as a degenerate tail — was tested directly against the anchor pool as an internal consistency check. Only 2 of the 12 anchors match the template's geometric prediction. The template itself survives as a descriptive vocabulary: it names the failure modes the pipeline detects, and the collapse criteria (peak ≥ 0.4, late mean below 40% of peak, zero-reward fraction ≥ 0.30) are used in the pillar's flagging throughout. What does not survive is the claim that these traces realise the template as a progression.

One further contrast deserves note because it is our own measurement rather than a synthesis. Under a same-stack comparison of PPO and GRPO on a saturated Qwen2.5-0.5B two-digit addition task, evaluation accuracy is 0.990 for GRPO and 0.992 for PPO, and the paired algorithm difference is -0.002 with $p = 0.374$ (paired t on n = 5 seeds, each seed's held-out accuracy on 200 items; source: platform_hybrid/paper/sections/frontier_synthesis_scaling.tex; recomputed from platform_hybrid/experiments/results/samestack_ppo_grpo.json). The 200 evaluation items are fresh random draws from the training generator, not a disjoint split. The pairing is by seed only, not by item: each arm drew its evaluation set from the shared random stream after training, and because GRPO consumes 16 problem draws per step against PPO's 128, the two arms of a seed were evaluated on almost entirely different items. Replaying the stream for the five seeds, the GRPO and PPO evaluation sets share only 6, 6, 4, 7 and 3 of 200 items, and the evaluation items that had also been drawn for training number 12, 16, 13, 15 and 13 of 200 for GRPO against 90, 86, 80, 83 and 74 for PPO, roughly 7% against 40% (corrected; see Table E.1; replay of `platform_hybrid/experiments/modal/modal_samestack_ppo_grpo.py`). The paired difference is therefore a difference of per-seed accuracies on different item sets with unequal train–evaluation overlap, not an item-paired contrast. At a 0.98–1.00 ceiling this does not change the null reading, but it is a further reason the null cannot be read as equivalence. This is the project's closest de-confound: the runner, clipped surrogate and step budget are shared, but the arms also differ in prompts per step (16 prompts $\times$ 8 completions for GRPO against 128 distinct prompts for PPO; Table 4.2). The two estimators are statistically indistinguishable, and because both sit at the ceiling the null cannot separate no effect from no headroom. They are not shown to be equivalent. The five per-seed differences are -0.005, $+0.005$, -0.005, 0.000 and -0.005, each one item of 200, at a 0.98–1.00

accuracy ceiling. A paired TOST with a ±0.005 margin gives p = 0.104, so equivalence at that margin is not established, although it is at ±0.010 (p = 0.008). The exact sign-flip permutation p on the same five pairs is 0.625. It is reported here rather than in P2 or P3 because it is the algorithmic counterpart of the P1 null — the cross-scale story is not the only axis on which GRPO's advantage fails to separate from its alternatives. The project's historical effect-size table also carries a Qwen3-8B PPO-versus-GRPO row. It is marked a provenance conflict and not estimable, and its Welch test, recorded in the historical twenty-test family at p = 0.7605, is carried as a provenance record rather than as an estimate, so no statistic is quoted for it here.

6.2.4 A withdrawn architectural contrast

An earlier version of this analysis reported a MoE-versus-dense gap across six pairs of anchors, with a mean gap of +0.338 and a permutation p = 0.023. That claim has been withdrawn. The defect is architectural: the Nemotron-120B anchor is a Latent-MoE, not a dense model, so the original six-versus-six allocation misclassified it. With the classification corrected, the same test returns a one-sided permutation p ≈ 0.178. A leave-Nemotron-out recomputation returns a gap of +0.278 with p ≈ 0.049, and this too is withdrawn, because removing the misclassified anchor from one side of the comparison does not repair the design. The withdrawal is recorded here because the project's convention is that retired claims remain visible with the reason for retirement attached.

A related cross-anchor statistic is retained, with its own caveat. Across the twelve anchors, seven have $|\Delta_1T| \leq 0.2$, where Δ_1T measures how far the anchor's endpoint deviates from the three-phase template's terminal prediction; the largest deviation is Qwen3.5-27B at +0.562 and the largest negative is Nemotron at −0.50. A Cohen's κ analysis of the categorical phase assignments is also reported in the source: across three labelling methods, the historical output records $\kappa = +1.000$ on the five-anchor set because the helper returns 1.0 when the denominator is zero. Both methods label every trace "plateau", so observed and chance agreement are each 1 and Cohen's $\kappa = (1 - 1)/(1 - 1)$ is mathematically undefined; only raw agreement of 5/5 is supportable there. On the twelve-anchor set the reported heuristic–AIC κ is +0.625, while the changepoint comparisons lie between −0.029 and +0.077. The five-anchor result therefore establishes agreement on a constant label, not validation of a phase classifier. Neither this agreement nor the cross-scale null identifies categorical capability structure as a better predictor than $\log_{10}$ N; such a claim would require a common predictive comparison.

6.3 P2 — The Zero-Variance Fraction (instrumentation, not a validated prognostic diagnostic)

The second pillar asks a mechanistic question: when GRPO stops learning, is the cause visible in the reward statistics of the groups it samples? The instrument proposed is the Zero-Variance Fraction. **P2's contribution is instrumentation:** ZVF is recomputable and regime-dependent; no measured-only, held-out-endpoint prognostic validation is established, and no prognostic language in older sources survives this demotion (Figure 6.2).

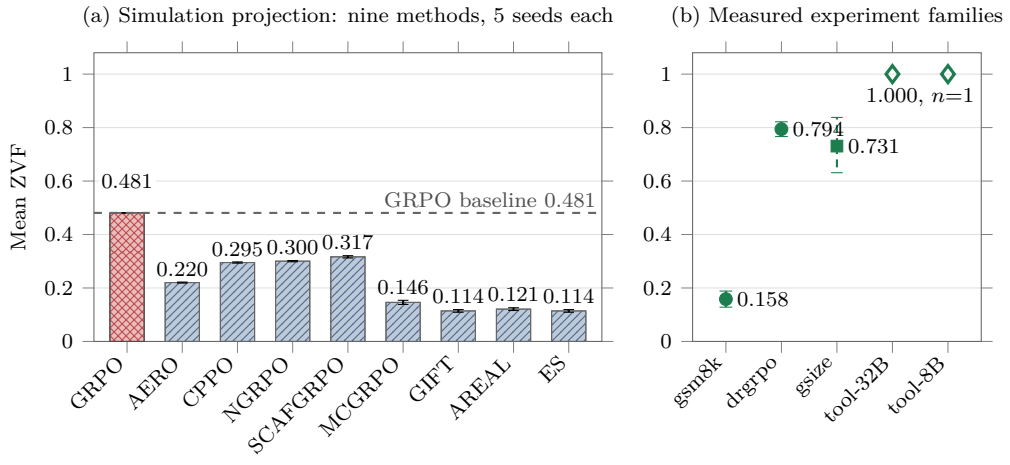


Figure 6.2: Mean Zero-Variance Fraction by method in a simulation projection (a) and by measured experiment family (b); neither panel compares backend libraries. (a) Nine variance-mitigation methods in a simulation projection ($G = 8$, math-verifiable task, 5 seeds each; hatched bars mark projected, not model-training, values): bar = mean of per-seed mean ZVF, whisker = ±1 SD across seeds (≤ 0.008). The projection ranks no methods; GRPO (cross-hatched) is the reference at 0.481, and in 3 of its 5 seeds the per-step collapse flag fires. (b) Measured runs: gsm8k = Qwen3-8B, three seeds of 200 GSM8K prompts at $G = 8$ (mean ±1 SD); drgrpo = Qwen2.5-0.5B arithmetic, GRPO and Dr. GRPO, 5 seeds each (10 runs, mean ±1 SD); gsize = Qwen2.5-0.5B group-size sweep, mean over $G \in \{2, 4, 8, 16\}$ with a dashed whisker spanning the per-G values (a range over G, not seed dispersion); tool-32B (Qwen3-32B) and tool-8B (Llama-3.1-8B-Instruct) are single runs (open diamonds, no interval) in which every group has zero reward variance. Source: platform_hybrid/experiments/results/zvf_by_library.tsv and the per-seed files it cites.

6.3.1 Definition and measurement

For a prompt x sampled from the training distribution, GRPO emits G completions and scores each with a verifier. Centring those rewards within the group produces the advantage signal. If all G completions receive the same reward — all correct, or all incorrect

— every centred reward is zero and the group contributes no contrastive signal to that step's update. The exact-tie fraction records how often this occurs; the default sample-variance tolerance in §4.3 also counts near-ties. They agree for the binary rewards below. Gradient utilisation is defined descriptively as GU = 1 − ZVF.

What a zero-variance group does to the update depends on the loss form. The source states the general case: in an objective with a KL penalty or auxiliary loss, a zero-variance group does not make the total gradient zero, and ZVF measures only the fraction of groups contributing zero centred reward contrast. An exact-tie group contributes zero to a verified group-centred policy surrogate, but the full update can include KL, critic or other auxiliary losses and optimiser state. Table 4.2 contains both nonzero-KL configuration evidence and unknown managed settings; neither may be relabelled zero. Near-ties counted by the $\varepsilon = 10^{-6}$ diagnostic need not have exactly zero policy gradients. ZVF therefore describes reward contrast, not measured useful compute or the whole update.

The statistic is validated by recomputation. Three stored GSM8K group tensors (Qwen3-8B, G = 8, sampling only, 200 problems per seed) were re-read from disk and their ZVF recomputed from the raw per-group rewards; the recomputed values are 0.130, 0.190 and 0.155, pooled 0.1583, matching the reported values exactly. This is the mechanical check that the quantity in the tables is the quantity the code computes. The earlier ≤0.4% ε-sensitivity statement did not distinguish exact ties from thresholded variance and is replaced here by a reproducible sweep over these same 600 groups. With independent seeded $\delta \sim \mathrm{U}(0,10^{-4})$ jitter, exact ties fall from 95/600 to 0/600. At sample-variance $\varepsilon = 10^{-9}$, 71/600 groups remain below threshold; at $\varepsilon = 10^{-8}$ through 10^{-2}, including the declared 10^{-6}, all 95/600 remain. Unperturbed binary rewards retain 95/600 across this range. At G = 8, jitter alone has sample variance at most 2.86×10^{-9}, so it cannot cross 10^{-6} in an originally tied group. PCD changes by $+2.984 \times 10^{-7}$. The example diagnoses exact-tie sensitivity, not failure of tolerance-based ZVF; it does not establish robustness to larger perturbations or other reward scales.

6.3.2 Source-reported magnitudes across libraries

The synthetic sensitivity panel has nine rows at K = 8 with five simulated seeds and a 100-step rollout budget, spanning vanilla GRPO and eight named variance-mitigation methods. Vanilla GRPO records a mean ZVF of 0.481 against a mean last-10 accuracy of 0.379, with zero of five seeds collapsing, zero of five drifting, and five of five plateauing. The remaining rows are: AERO 0.220 ZVF with 0.399 accuracy; CPPO 0.295 with 0.392; NGRPO 0.300 with 0.387; SCAFGRPO 0.317 with 0.409; MCGRPO 0.146 with 0.322; GIFT 0.114 with 0.326; AREAL 0.121 with 0.328; and ES 0.114 with 0.316. The

four lowest-ZVF rows each record one of five seeds drifting and four of five plateauing.

The variance-mitigation rows require a caveat that the source states explicitly and that this chapter preserves: they are a declared simulation projection used for sensitivity analysis, and they "should be read as synthetic, not as independent real-library deployments". The caveat covers the whole panel. The vanilla GRPO row and its collapse/drift/plateau counts come from the same dry-run file, `experiments/results/variance_mitigation.tsv`, as the other eight rows, and Chapter 2 §2.3 already records that GRPO baseline row as synthetic. None of the nine rows is a measured deployment. Anyone citing the nine-row ordering as evidence that a named method mitigates failure would be citing a projection.

Two further results sharpen the picture, and the first mixes measured and projected rows. First, across 60 runs the late-phase ZVF of GRPO runs sits in the range 0.87–0.97, while early-phase ZVF for variance-mitigation GRPO and for the largest group size sits in the range 0.04–0.13; smaller group sizes start higher, between 0.25 and 0.61. The lag-1 autocorrelation of the ZVF trace is approximately 0.94, describing smoothness in this mixed pool without establishing a measured early-warning capability. Of those 60 runs, 45 are the five-seed variance-mitigation projection rows above (corrected; see Table E.1). The measured part is the remainder, which includes the 12-run group-size sweep. The source does not report the ranges or the autocorrelation separately for the measured subset, so these figures describe a pool that is mostly synthetic.

Second, the historical source reports ZVF crossing a warning threshold only 1 to 3 steps ahead of the plateau. This short lead from the pooled source does not establish measured-only early-warning validity. Its proposed monitoring rule remains unvalidated: report ZVF alongside mean reward, and treat a rise of more than 0.3 sustained over ten consecutive rollout steps as a warning. The project reports this limitation against its own proposed diagnostic rather than in a footnote.

6.3.3 The all-correct wall and the mastery–incapacity aliasing

The mechanism behind large ZVF values on easy tasks is a saturation effect that the project calls the all-correct wall. A matched-budget panel was run at 2,560 rollouts per arm — G = 2 over 160 steps against G = 16 over 20 steps — on Qwen3-8B with GSM8K, LoRA rank 4 and batch size 8. The late G = 2 arms reach a mean training reward of approximately 1.0 with ZVF between 0.75 and 1.0; the G = 16 arms hold ZVF at or below 0.25 at the same rollout budget. The reading is that when the policy solves the task, nearly every group becomes all-correct, nearly every centred reward is zero, and the estimator loses its contrast even though the reward signal is at its maximum. Signal starvation in this regime is driven by ease, not by difficulty — which is the opposite of

the intuition that motivates variance-mitigation work.

This produces the pillar's most important structural caveat. ZVF is unsigned and symmetric: an all-wrong group ($K_x = 0$) and an all-correct group ($K_x = G$) score identically. The statistic therefore cannot distinguish mastery from incapacity, and this aliasing is a theoretical limitation on its interpretation; the historical pooled correlation does not separately test the claimed held-out association. Under an i.i.d.-Bernoulli model the closed form is $\mathrm{ZVF}(p_x, G) = h_G(p_x) = p_x^G + (1 - p_x)^G$, and it follows in one line. If the G rewards of a group are independent Bernoulli(p) draws, the group has zero variance exactly when all G rewards are equal. That happens when all are 1, with probability p^G, or all are 0, with probability $(1 - p)^G$. The two events are disjoint, so $P(\text{zero variance}) = p^G + (1 - p)^G$. At $p = \frac{1}{2}$ this is $h_G = 2^{1-G}$, so $\ln h_G$ falls by $\ln 2$ for each unit increase in G. The project's source document for this closed form and the aliasing analysis is headed as reasoning contributions and proposed theorems from ChatGPT Pro Extended and Gemini Deep Think, "NOT experiments this paper ran". That provenance is kept on record, and AI assistance is declared in the front matter, but the result does not rest on it: the derivation above is elementary and is the argument this thesis relies on. What the project itself measured is the empirical ZVF against the closed form, evaluated at the per-step training reward rate because ZVF is a training-batch quantity (corrected; see Table E.1). Recomputed from the per-step training rewards in `platform_hybrid/experiments/results/groupsize_zvf_sweep.json` (3 seeds × 40 steps per arm), the per-step-average null is 0.828, 0.709, 0.597 and 0.522. The measured mean ZVF is 0.838, 0.764, 0.691 and 0.631, so the residuals are +0.010, +0.055, +0.094 and +0.109: measured ZVF sits *above* the null at every G. Gradient utilisation rises across the same range from 0.162 to 0.369. The magnitude and interpretation of the gap depend on the baseline; averaging over heterogeneous prompt success probabilities is part of the formal null in §4.3. Evaluating the closed form at the pooled training rate understates the mean of the per-step plug-in predictions, because h_G is convex: $h_G(\overline{p}_t) \leq \overline{h_G(p_t)}$. The per-step-average plug-in baseline is 0.60 at $G = 8$, rather than the 0.33 obtained at the pooled mean. A held-out rate is a different quantity and has no corresponding ordering guarantee. Even the per-step baseline uses a batch-average estimate instead of the unknown per-prompt probabilities in §4.3, so prompt-difficulty heterogeneity and estimation error remain. Against the per-step-average baseline the measured ZVF at $G = 8$ (0.69) *exceeds* the null by approximately 0.09. The change from the pooled baseline to the per-step baseline is the Jensen effect; it does not by itself explain the remaining 0.09 residual. The source consequently "do[es] not read it as strong evidence that the independence null is a lower bound". This chapter uses only the per-step-average baseline. It is a weak consistency check on shape rather than evidence about dependence.

The formalisation's own summary of the same sweep, twelve runs and 480 logged steps,

reports per-step observed ZVF correlating at r = 0.92 with the Bernoulli-null prediction $p^G + (1 - p)^G$, with mean ZVF of 0.84, 0.76, 0.69 and 0.63 at G = 2, 4, 8 and 16 respectively. That correlation is a shape check, not a validation: the null for each step is computed from the same step's mean reward, so a high r is partly mechanical. At larger scale the same instrument was run on Qwen3-8B against GSM8K test problems through the Tinker managed API at G = 8, temperature 1.0, over 200 problems and three seeds (sampling only, no training; these are the three stored tensors of §6.3.1), yielding a mean ZVF of 0.16 composed of 12.7% all-correct groups, 3.2% all-wrong groups and 84% mixed groups; the raw correlation with the mechanical null is approximately r = 0.93 with rank $\rho \approx 0.65$, and the i.i.d. null over-predicts (approximately 0.28 against the observed 0.16). The direction of the deviation from the null is therefore opposite in the two runs: above the null on the 0.5B sweep, below it on this Qwen3-8B sampling run. The source does not state which baseline produced the 0.28, and neither deviation is read as evidence about dependence between completions.

6.3.4 Prognostic value — withdrawn mixed-pool analyses (quarantined; do not cite as predictive evidence)

The historical residual analysis does not establish predictive validity on measured held-out data. It reports a naive correlation between mean ZVF and its outcome column of r = +0.22, with n = 17 per-experiment rows. After mean reward is regressed out of the outcome, the residual correlation with ZVF is r = +0.205 (historical p = 0.43, n = 17 experiments). The associated intervals are not used as inferential evidence here. These are retained as historical mixed-source calculations, not measured-only evidence. The source's own conclusion is that "we therefore do not treat ZVF as an incremental predictor above reward mean".

The source-lineage audit resolves two further defects. Of the seventeen finite cells, nine pool variance-mitigation simulation rows. Moreover, the residual script's outcome is `last10_avg`, mixed source outcomes including late training reward, despite its held-out wording. The remaining cells mix sampling, training and tool-use records. Residualising one variable against mean reward does not turn this mixture into an independent held-out test; it is also a semipartial calculation because ZVF itself is not residualised. Neither this coefficient nor its historical interval supports a measured-only predictive claim.

Pooling across task types shows why a pooled association cannot be read as a score. Over N = 15 experiments spanning five model families, the association between ZVF and performance is Pearson r = −0.769 (p = 0.0008) with Spearman $\rho = -0.784$ (p = 0.0005), but it is confounded by task type: tool-use experiments reach ZVF = 100%

at approximately 0% reward while GSM8K experiments average ZVF = 8.5%. Within GSM8K the association weakens to r = +0.40 (p = 0.09, N = 19), and then to r = +0.13 (p = 0.79) when restricted to the seven model-varying runs. The N = 19 is a separate and larger pool of Tinker GSM8K runs, not a subset of the N = 15 pooled experiments, so the two analyses are not nested. A statistic whose sign is set by which tasks are included in the pool is not a score. On the instrumented runs ZVF also does not track final accuracy ($r \approx 0.09$, n = 12).

The historical source reports stronger association with catastrophic collapse than with graded outcome. It states Spearman $\rho = 0.56$ (Fisher 95% CI [0.19, 0.79], n = 23 pooled cells) and point-biserial 0.62. It labels the outcome correlation as final held-out accuracy, $\rho = 0.27$, and the registry's bootstrap 95% CI is [−0.37, 0.88]; the Fisher CI is [−0.16, 0.61], p = 0.21, n = 23. These are historical reported values, not current inferential evidence. The lineage audit identifies eighty source rows grouped into twenty-three cells. Six cells have missing ZVF and are dropped before the rank correlation, while the report prints the pre-drop count. Thus the displayed coefficient uses seventeen finite cells, including nine simulation cells. The outcome field is a mixture of stored source metrics, including late training reward; it is not a common held-out endpoint. The claimed sample size and measured-held-out interpretation are withdrawn, as are intervals justified with the pre-drop sample size. The new Colab audit preserves the source rows, exclusions and grouping in an executable report. A three-channel risk index built on the diagnostic — magnitude, critical slowing down via a rolling lag-1 autocorrelation with window 15, and drift slope, blended 0.3/0.5/0.2 with a max-fusion variant — was evaluated over a 52-row cross-experiment panel comprising 45 variance-mitigation seeds, 2 tool-use collapse anchors and 5 scaling-law collapse anchors, with 11 failures and 41 safe runs. Cross-experiment AUROCs are 0.663 for magnitude, 0.758 for critical slowing down, 0.579 for drift, 0.763 for the blended risk index and 0.929 for the max-fusion index; within-methods, the same values fall to 0.073, 0.335, 0.293, 0.396 and 0.805 respectively. None of these AUROCs is a measurement on real training runs, and this chapter reports them as a synthetic-panel exercise. All 45 variance-mitigation rows come from the declared simulation projection (§6.3.2). The seven collapse anchors enter with channel values fixed by the analysis script, not measured: mean ZVF 1.0 or an imputed 0.95, lag-1 0.95 or 0.85, and slope 0 or 0.015. The 41 safe rows are therefore all synthetic. The max-fusion index was selected after the per-axis results were seen. For the 0.929 figure, a Hanley–McNeil 95% CI with 11 positives and 41 negatives is [0.82, 1.00]; that interval describes this constructed panel only. No AUROC is computed on the measured rows alone, because they contain too few failures to estimate one. The gap between the cross-experiment and within-method columns is a warning about the index's transportability: most of the cross-experiment discrimination is coming from the

fact that collapse clusters by experimental family, not from a within-family predictive signal. The declared thresholds are a risk above 0.55 to treat as failure-positive, below 0.30 as safe, and the interval between as requiring investigation.

The pillar's own conclusion names three load-bearing limitations: the diagnostic is mechanically coupled to reward sparsity, group size and baseline accuracy; the reported stronger collapse association comes from the mixed-provenance table above and has not been established on a separately identified measured-only cohort; and the unsigned statistic aliases mastery with incapacity. A proposed replacement, the pairwise contrast density, is introduced in the synthesis document with a target association of $\rho \gtrsim 0.45$; the project states that this bar is not yet met by the replacements and that the head-to-head protocol remains future work.

6.4 P3 — Group Size and Contrast Density

The third pillar studies G, which plays two roles simultaneously in GRPO: it is a variance-reduction knob, like a Monte-Carlo baseline, and it is a preference-density knob, since centring rewards within a group induces implicit pairwise contrasts — nonzero only for mixed-reward groups. Practitioners often treat larger G as strictly better by analogy to variance reduction, which conflates the two roles and ignores cost. The measured evidence does not justify a group-size optimum. Accuracy point estimates are non-monotone in G, but the differences are not resolved statistically, so non-monotonic trainability is not established (Figure 6.3).

6.4.1 The measured sweep

The primary sweep measures G ∈ {2, 4, 8, 16} on a near-ceiling two-digit addition task with Qwen2.5-0.5B, three seeds and 40 steps, evaluated on 200 fresh draws from the training generator. Held-out accuracy (200 fresh problems per run) traces an inverted U with its apex at G = 8. Values are mean ± SE over n = 3 seeds: 0.9900 ± 0.0029 (SD 0.0050) at G = 8, 0.9817 ± 0.0044 (SD 0.0076) at G = 2, 0.9883 ± 0.0017 (SD 0.0029) at G = 4 and 0.9783 ± 0.0060 (SD 0.0104) at G = 16. At n = 3 seeds the arms are statistically indistinguishable: a one-way ANOVA across the four arms gives $F(3, 8) = 1.82$, $p = 0.22$, recomputed from `platform_hybrid/experiments/results/groupsize_zvf_sweep.json`. The minimum detectable effect at 3 versus 3 seeds is $d = 3.07$, so only very large differences could have been detected. A reanalysis of the same measured sweep, using B = 4000 bootstrap resamples with analysis seed 20260702 rather than a new training run, records G = 2 and G = 16 at 0.9817 and 0.9783, a difference of +0.0033 (G = 2 minus G = 16) and an interval of [−0.008, +0.015]; G = 4 and G = 8

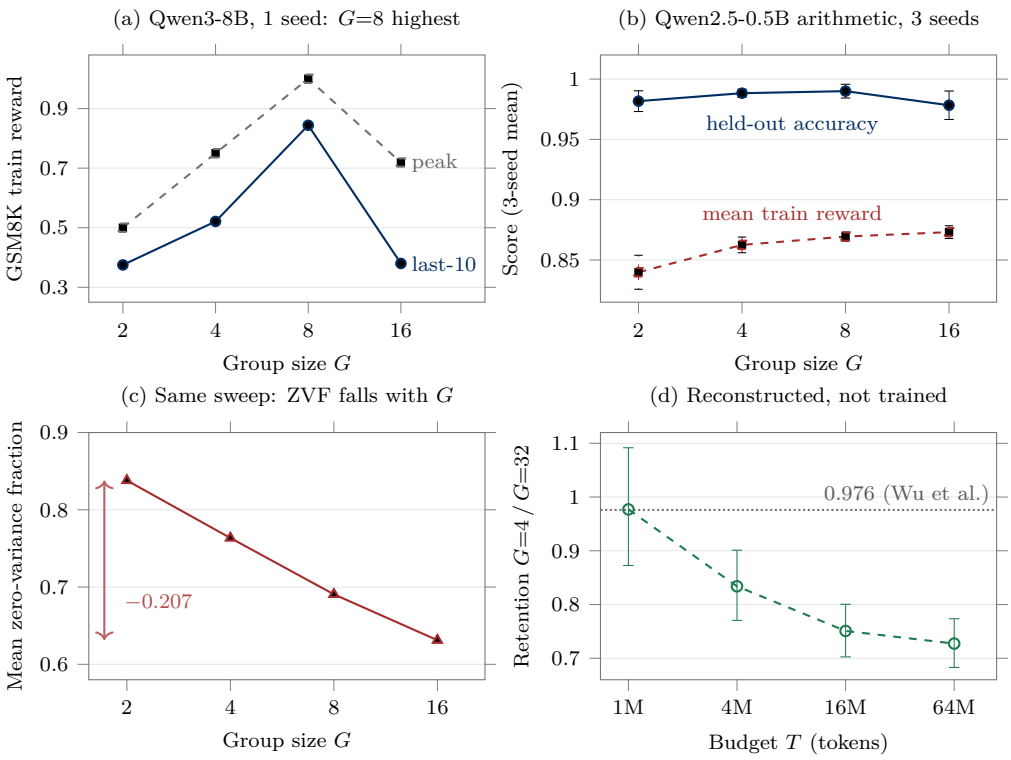


Figure 6.3: Group size G: one single-seed sweep, one three-seed sweep and one reconstruction. (a) Qwen3-8B on GSM8K through Tinker, one seed, 30 steps: peak and last-10 in-training reward (not held-out); $G = 8$ is highest, but with no seed replication no optimum can be established. (b) Qwen2.5-0.5B on arithmetic, 3 seeds, 40 steps: held-out accuracy and mean train reward, bars ±1.96 SE (approximate 95% CI). The held-out apex at $G = 8$ (0.990) overlaps $G = 4$ (0.988) and $G = 16$ (0.978); overlap is descriptive, not a test, and the arms are statistically indistinguishable. (c) Mean zero-variance fraction on the same sweep, falling by 0.207 from $G = 2$ to $G = 16$. (d) Reconstructed retention of $G = 4$ relative to $G = 32$ against token budget (dashed line and open markers: reconstructed values, not matched-budget training runs; bars are the file's conditional reconstruction intervals). The point estimate reaches the Wu et al. 0.976 retention level at 1 of 4 budgets ($T = 1$M), but the equivalence test at that margin is not passed at any budget. Sources: paper/expected_results.json (a); experiments/results/group_size_effect.tsv (b–d).

add +0.010 and +0.012 respectively, and G = 4 versus G = 32 was not measured on that sweep.

The retention figures are the cleanest way to state the same result. G = 2 retains 100.3% of G = 16. A later unified synthesis at the same configuration reports "retention" ratios and signal-to-noise ratios with intervals. The "retention" is a ratio of last-10 *training* reward, not of held-out accuracy, so this chapter calls it a training-reward ratio. The point values are G = 2 1.0000, G = 4 0.9941, G = 8 0.9960 and G = 16 1.0068, with SNR 1.46, 1.76, 1.94 and 2.16. All four ratios sit above the Wu et al. [20] 97.6% reference bar. At the seed level (paired TOST on per-seed last-10 training reward against G = 2, margin ±0.02, n = 3 seeds), the TOST p-values are 0.012 at G = 4, 0.043 at G = 8 and 0.056 at G = 16 (corrected; see Table E.1). Equivalence to G = 2 at that margin is therefore supported, narrowly, for G = 4 and G = 8, and is **not** established for G = 16.

The signal-to-noise ratio grows sublinearly with G: it reaches about 52% of the $\sqrt{\text{G}}$ ideal, and about 48% above a flat baseline. Reward itself is statistically flat across the sweep, in the range 0.971–0.984. The marginal ZVF gain from G = 8 to G = 16 is 0.6906 → 0.6312, a fall of 0.059, which is smaller than the G = 2 → G = 4 fall of 0.8380 → 0.7635, a fall of 0.075. Diminishing returns on the contrast axis are visible in the measured data, which is what the reconstruction later formalises.

The pillar's own framing of this regime is important and is stated in its abstract: near the ceiling, variance is compressed, so the finding is "no detectable G effect under saturation", not evidence of equivalence on harder, unsaturated tasks. That is, the flat retention curve is a property of an easy task, and the pillar explicitly declines to generalise it. The measured equivalence tests were run up to G = 16, and at the seed level they establish equivalence only up to G = 8; there is no directly trained, matched-budget G = 32 cell in the primary sweep. The retention-versus-budget axis is where the picture changes: R(1M) = 0.976, R(4M) = 0.833, R(16M) = 0.750 and R(64M) = 0.727, fitted by $R(T) = 0.729 + 0.247\, e^{-T/5.76\text{M}}$ with $R^2 = 0.948$ and an asymptote of 0.729. The four points are themselves reconstructed (§6.4.2), and a three-parameter curve through four points leaves one residual degree of freedom. The fit is therefore illustrative only, and no confidence interval is reported for its asymptote (corrected; see Table E.1). The Wu reference line and this reconstructed curve cross at T = 1M and diverge by 25 percentage points at T = 64M. The operative conclusion is scoped to the 0.5B arithmetic task: no G is distinguishable there, so G = 2 is the cheapest setting at statistically indistinguishable accuracy. It is not a recommendation for harder tasks, and it does not conflict with the single-seed Qwen3.5-4B observation of §6.4.3 that G = 2 under-trains with a 50% batch collapse, which is a different model and task.

6.4.2 The same-stack four-axis audit and the reconstructed budgets

The strongest de-confound for P3 is a four-axis factorization audit of the same training stack. On the algorithm axis, the residual effect is small: $\eta^2 = 0.023$, from the same five-seed same-stack contrast as §6.2.3. The GRPO−PPO difference is −0.002, paired by seed only: the two arms of each seed were evaluated on different items, with PPO's evaluation items overlapping its training draws far more (§6.2.3; corrected; see Table E.1). The factorization file reports a Monte-Carlo permutation p of 0.62; the exact sign-flip p over the five pairs is 0.625, and the paired t p of 0.374 in §6.2.3 is the primary test for this contrast. Equivalence on the algorithm axis is not established, because the TOST at ±0.005 in §6.2.3 does not establish it (corrected; see Table E.1). On the group-size axis the file reports $\eta^2 = 0.54$ and 0.63, with Cohen's d = −1.47 for the G = 2 → 16 comparison. The 0.54 is `eta2_G_last10`, a share of last-10 *training reward*, not of terminal held-out accuracy; 0.63 is for gradient norm. Recomputed on the 12 sweep runs (3 seeds per G), the training-reward share gives F(3, 8) = 3.08, p = 0.090. The corresponding held-out share is $\eta^2 = 0.41$, F(3, 8) = 1.82, p = 0.22. The source itself grades the G-axis result only SUGGESTIVE. The supportable reading is that the group-size axis shows a large but not statistically significant share of training-reward variance at n = 3 seeds per arm, and that the algorithm label is not shown to matter on this stack.

A Miller-style [62] error-bars audit covered the pillar's four headline contrasts. Two of them are held here at hypothesis-generator status rather than reported as precise (corrected; see Table E.1): the gradient-utilisation ratio at T = 1M, with a point estimate of 5.03 and no interval that n = 4 budgets can support, and the negative retention-versus-training-token slope, which is fitted to the four *reconstructed* budgets of the grid below, not to trained arms. The SNR-versus-$\sqrt{G}$ slope has an interval of [+0.148, +0.583], which contains the ideal value of +0.500 and is therefore graded NULL. The native Wu-style equivalence claim that G = 2 ≈ G = 16 is also graded NULL. This chapter therefore reports none of the four P3 headlines as precise, and the pillar's own summary is that the data do not justify a universal optimum.

Everything at or above G = 32 in the pillar comes from an explicitly reconstructed token-budget grid, retained only as a hypothesis generator. The reconstruction table gives, for G = 4 versus G = 32, a T = 1M comparison of 0.41 against 0.42 with a difference of −0.01, a 97.6% retention ratio and a "generalizes" verdict of yes, a point-estimate criterion of retention at least 90% — the equivalence test at the 97.6% margin, with a reconstruction interval of [0.873, 1.092] at T = 1M, is not passed at any of the four budgets; at T = 4M, 0.55 against 0.66 with −0.11, 83.3% and no; at T = 16M, 0.63 against 0.84 with −0.21, 75.0% and no; at T = 64M, 0.64 against 0.88 with −0.24, 72.7% and no. The source labels these as conditional reconstruction intervals, not fresh-run confidence intervals. The T = 64M accuracy row across G = 4, 8, 16, 32 and 64 reads 0.64, 0.80, 0.85, 0.88

and 0.87 — the apex moves with budget, which is precisely the pattern that makes a universal G optimum incoherent, and precisely the pattern the project declines to claim as measured. A fit of the critical-budget form $|\Delta(T)| = a(1 - e^{-T/\tau})$ gives â = 0.30 and $\hat{\tau} \approx 12.1$M tokens, with a 5% critical budget of 2.21M tokens and an interval of [1.29M, 4.77M]. A difficulty-gated adaptive rule derived from this analysis reports a mean selected group size of 7.0 and a projected 56.2% rollout saving against always using G = 16, with 5 of 20 cells under-predicting by more than 5 percentage points. These are projections, and the chapter marks them as such.

A separate conditional utility audit over 505 tasks, scoring each group size by $(1 - \text{ZVF})/\sqrt{\text{G}}$, selects G = 4 over G = 5 by 0.00177 with a 95% bootstrap interval of [0.00082, 0.00270]. The margin is positive but small, and it is conditional on cohort and objective.

6.4.3 The curriculum and matched-token null results

Two interventions that P3's design space naturally suggests were run and both returned nulls. They are reported here rather than elsewhere because they are group-size interventions, and because their negative results are load-bearing for the chapter's overall argument.

The first is a difficulty curriculum that filters collapsed groups during training. The intervention works as designed on its own terms: it drives the reported zero-gradient fraction from 0.50 to 0.00 in accepted training batches. Rejected candidates still consume sampling resources, so this does not eliminate wasted rollouts across the whole collection procedure. It does so at approximately 4.81 times the sampling cost, and its held-out gain is identical to the baseline's — both arms move from 0.80 to 0.85 on a held-out set of n = 20 (one seed, eight steps), a gain of +0.05 in each case, which is one item of 20. At a matched 30k-token budget the curriculum ties the baseline at +0.028 against +0.028, and at five times the cost it loses. The verdict recorded is Null. An important provenance note attaches to this result: an independent verification pass conducted on 6 July 2026 flagged the curriculum claim, along with a single-seed G = 4 "win" of +0.125, as SUSPECT and overclaimed, before multi-seed re-testing failed to reproduce either apparent advantage reliably. The group-size sweet-spot result is itself a null for the same reason — the +0.125 advantage at G = 4 rested on a single held-out example and did not survive multi-seed re-testing, and G = 2 under-trains with a 50% batch collapse and a +0.0 gain.

The second null family concerns loss formulations intended to remove the length bias. On the held-out metric, the standard sum formulation is nominally the best of the three tested: +0.125 against +0.000 for mean-normalisation and +0.042 for the surprise formulation. These are measured on held-out sets of n = 12–20 per arm, so each difference corresponds to about one or two items and none is distinguishable from noise. The

length change under the standard arm is recorded as $\Delta\text{len} = -16$. The verdict is Null. A fourth null, on a step-1 predictive layer-freeze, is reported in the same table because it was proposed as a cheap way to stabilise group-relative training: it achieves a per-step overlap of 1.0 on a 1.5B hardcoded-arithmetic toy, but only 0.11 on both seeds at 3B on real GSM8K, while the concentration statistic still holds at approximately 0.39. A later four-seed pass at 3B supersedes that two-seed figure with a mean overlap of 0.083 ± 0.048 (mean ± SD, n = 4 seeds), below the 0.25 expected overlap for independent uniform top-nine sets among 36 layers. The target is the aggregate across all steps, including step 1, rather than an independent final-step target (§5.5). Verdict: Null, and a reversal of its own toy-scale positive under scaling.

Across these four checks, no reliable held-out improvement was established in the tested configurations. The matched 30k-token comparison specifically supports the curriculum null; the other small-sample checks do not jointly constitute a matched-cost intervention study. These results leave the diagnostic's prescriptive value unresolved, which is why P2 is reported as a monitoring tool rather than a validated optimisation objective.

6.5 P4 — Length Bias and Held-Out Generalisation

The fourth pillar tests the most widely repeated specific criticism of GRPO: that it rewards verbosity, inflating completion length in a way that Dr. GRPO corrects. The pillar's headline is a scoped null, and the scope is the point (Figure 6.4).

6.5.1 The controlled null

Sixteen controlled runs were analysed: ten on an arithmetic task with Qwen2.5-0.5B over 40 steps, and six on GSM8K chain-of-thought with Qwen2.5-1.5B-Instruct over 30 steps, split evenly between GRPO and Dr. GRPO. The arithmetic half is saturated: evaluation accuracy is 0.987 for GRPO and 0.992 for Dr. GRPO (paired $p = 0.35$, five seeds), and completions average 4.7 tokens, so its accuracy and length nulls are nulls at a ceiling. Only the GSM8K-CoT half has headroom. At these 30–40-step horizons, neither algorithm exhibits the verbosity-trap signature on either task: the pillar's length-bias flag, which fires when completion length grows while reward stays flat or falls, is zero on every one of the sixteen runs. That flag is not the roster audit's peak-then-decay rule of §6.5.2. Recomputed from the per-step logs, the peak-then-decay rule (peak before 65% of training, last-10 mean reward below 90% of peak) fires on none of the ten arithmetic runs but on five of the six GSM8K-CoT runs, three GRPO and two Dr. GRPO, because the reward trace on that task is noisy and peaks early; length still falls in all five.

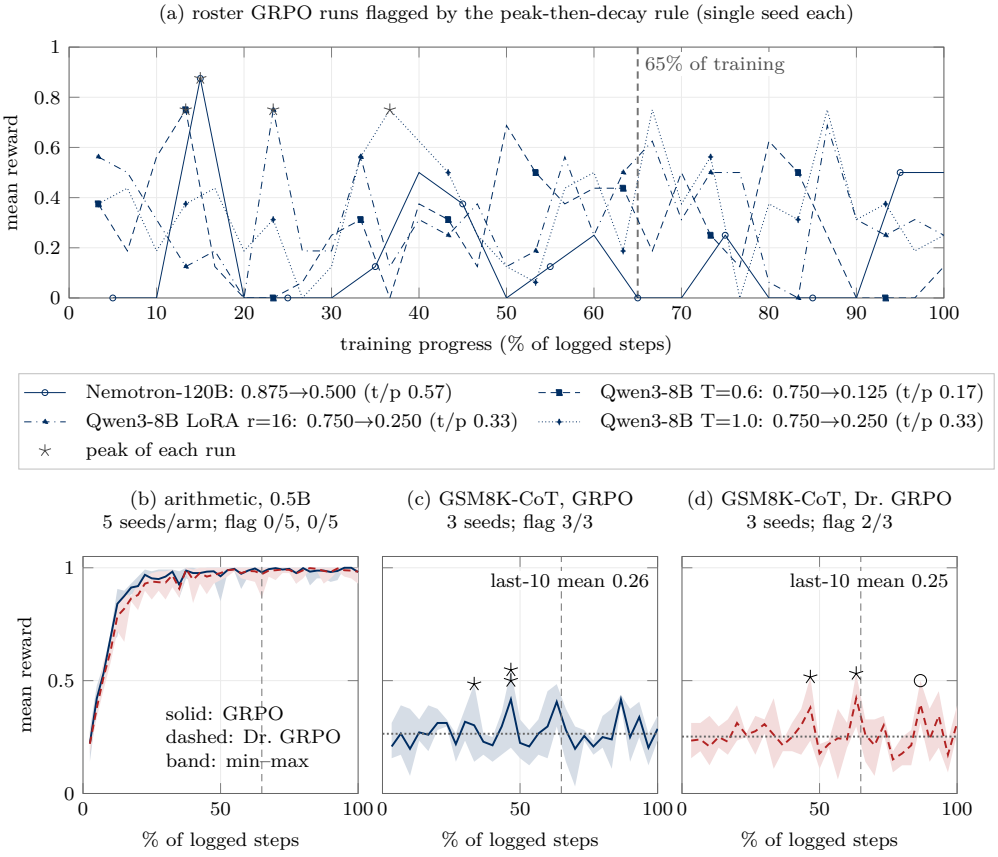


Figure 6.4: The post-hoc peak-then-decay rule (peak before 65% of logged steps and terminal reward below 0.90× peak) on the roster and on the controlled comparison. (a) The four of eleven roster GRPO runs that carry the flag (single seed each; legend gives peak→terminal reward and t/p = terminal÷peak; stars mark peaks). (b)–(d) The controlled sixteen-run comparison, seed mean (line) and min–max across seeds (band); dashed vertical line at 65%, dotted horizontal line at the arm's last-10 mean. (b) Arithmetic, Qwen2.5-0.5B, 40 steps, 5 seeds per arm: every seed peaks at 1.0 and stays there, so the rule fires on 0 of 10 runs. (c, d) GSM8K-CoT, Qwen2.5-1.5B-Instruct, 30 steps, 3 seeds per arm: seed peaks (stars = flagged, open circle = not flagged) fall at 33–63% of training and the last-10 mean (0.26 GRPO, 0.25 Dr. GRPO) is far below every peak, so the rule fires on 3 of 3 GRPO and 2 of 3 Dr. GRPO runs. Completion length falls in all sixteen runs, so the pillar's length-bias flag (length rising while reward stays flat or falls) is zero everywhere: the peak-then-decay rule marks noisy reward in both algorithms, not length inflation. Flags recomputed from the per-step logs in drgrpo_vs_grpo.json and drgrpo_gsm8k_cot_full.json.

The summary correlations are as follows, given as mean ± SD across seeds (n = 5 arithmetic, n = 3 GSM8K-CoT). On arithmetic, the rank correlation between training step and completion length is −0.405 ± 0.176 for GRPO and −0.307 ± 0.181 for Dr. GRPO; on GSM8K-CoT it is −0.622 ± 0.301 and −0.355 ± 0.255. The step-versus-reward correlations are +0.709 ± 0.082 and +0.753 ± 0.074 on arithmetic, and +0.046 ± 0.162 and +0.025 ± 0.091 on GSM8K-CoT. The length-versus-reward correlations are −0.419 ± 0.155 and −0.293 ± 0.182 on arithmetic, and −0.501 ± 0.258 and −0.618 ± 0.118 on GSM8K-CoT. Mean reward over the last ten steps is 0.988 for both algorithms on arithmetic, and 0.265 for GRPO against 0.252 for Dr. GRPO on GSM8K-CoT. The direction of the length trend is negative everywhere: all sixteen length slopes are negative, with the arithmetic GRPO slope at −0.029 tokens per step and the GSM8K GRPO slope at −0.481, and the count of runs with a positive horizon is zero. On the harder task, GRPO's final-ten-step mean completion length is 184.4 tokens against Dr. GRPO's 189.3 — a difference of +2.7% in the direction opposite to the critique.

The pillar's abstract states the scope of this null explicitly. The claim is bounded by the 200-token cap used in that regime, and the summary sentence is that "the verbosity-trap signature is absent in this regime". The pillar is not claiming that GRPO never inflates length; it is claiming that within a capped, short-horizon regime it does not, and it names the length-confounded regime in which a Dr. GRPO advantage should appear as future work.

6.5.2 The roster-level verbosity-trap audit

Set against the controlled null is a descriptive audit over the whole experiment roster, and here the picture differs. The audit defines four statistics per trace with at least five steps: an instability index σ(r_tail)/|μ(r_tail)| over the final 50% of training; a monotonicity score, the fraction of consecutive step-pairs with strictly improving reward; a regression severity, the largest normalised drop from peak; and a binary verbosity-trap flag, set when the peak occurs before 65% of training and the terminal reward falls below 90% of peak.

On that definition, the eleven GRPO runs in the roster have a mean instability index of 0.267 ± 0.335, against 0.785 ± 0.297 (mean ± source-reported spread across runs; the source does not identify whether the spread is an SD, SE or another quantity) for the seventeen PPO-labelled runs. Four of the eleven GRPO runs, 36% (Wilson 95% CI [15%, 65%], one run per configuration), carry the flag on this definition, including both Qwen3-8B runs and the Nemotron-120B run. That count is reported here as a description of the roster, not as evidence of length bias, because the flag does not isolate the behaviour it is named for. Three properties of the rule prevent the stronger reading. Its

thresholds are post hoc: neither the 65% peak position nor the 0.90 terminal-to-peak ratio is pre-registered anywhere in the repository, and the rule cannot be traced to a commit that predates the traces it judges. It is not specific to length: the metric it tests is in-training reward, and the project's own source reads the flag as "a generic instability detector" rather than a length measure, so a run can carry it without any change in response length. And its base rate is high: applied to the wider trace pool rather than this eleven-run subset, the rule fires on the majority of runs — including PPO-labelled runs and the Dr. GRPO control in the one matched comparison — so 36% sits at or below the rate the rule produces on traces with no decay at all. The project's own length data point the other way: under the 200-token cap, length drifts from 194.4 to 183.5 tokens, i.e. shorter. The run-level audit therefore does not establish length inflation, and the pillar's negative finding rests on the controlled comparison below rather than on this roster count. The Nemotron run records the highest instability index in the pool at 1.194, with a regression severity of 1.0 and a terminal-to-peak reward ratio of 0.57. The two DeepSeek-V3.1 GRPO runs, by contrast, show markedly lower instability, with a mean of 0.143. The PPO rate of 12/17 has a Wilson 95% CI of [47%, 87%]. These are descriptive uncertainty intervals for heterogeneous roster counts; their overlap is not a formal test of a rate difference, and the pool composition prevents an algorithm-level stability comparison.

Two caveats on that comparison must travel with it. First, the PPO pool is dominated by classic-RL library runs (SB3, CleanRL, Tianshou) that failed to train at all, with last-10 rewards below 5%; a near-zero reward trajectory mechanically produces a high instability index. Restricted to LLM-native PPO, the PPO Llama instability is 0.105, lower than GRPO Llama's 0.228, and the source therefore explicitly declines to claim that GRPO is more or less stable than PPO at the algorithmic level. Second, the audit's reward metric is the in-training reward, not a held-out one, and the audit pool is single-seed per configuration: each Tinker configuration was run once and is reported descriptively. The only multi-seed matched base-versus-RL control on Qwen3-8B is the five-seed comparison discussed below.

An earlier draft of this report's summary attributed to P4 the claim that Dr. GRPO is the only algorithm without the verbosity-trap pattern. That claim could not be located in any P4 source. What the sources state is that 36% of the audit's GRPO runs carry the flag; the audit does not report a per-algorithm flag rate for Dr. GRPO, and in the controlled sixteen-run comparison the length-bias flag is zero for both algorithms while the peak-then-decay rule fires on both (three of three GRPO and two of three Dr. GRPO runs on GSM8K-CoT). The finding recorded here is therefore the sourced one: the peak-then-decay pattern is not specific to GRPO, it appears in both arms of the controlled comparison without any length inflation, and the project makes no claim that

Dr. GRPO is uniquely free of it. The narrowest related statement the sources do support is a length-drift one — that Dr. GRPO is the only algorithm whose length keeps drifting upward after the initial compression phase — which is a different statistic and is not the verbosity-trap flag.

6.5.3 Elevated analyses

Because the controlled 30–40-step null is a null, the pillar runs a sequence of progressively more sensitive analyses to establish whether the trap is present but invisible at that horizon. Four of these deserve report, and all four are exploratory. They were run across iterations 12, 20 and 24 of the analysis log after the controlled null was known. The seed counts are small: n = 5 arithmetic and n = 3 GSM8K seeds, and three seeds admit only 10 distinct unordered bootstrap count configurations (27 ordered draws of size three). Several of the intervals resample autocorrelated steps or windows within runs rather than seeds. The p-values below are uncorrected unless stated, and roughly fifteen tests are reported across the three iterations.

A sliding-window trap-onset analysis with window W = 10 relaxes the flag from "peak before 65% of training" to "local peak followed by decay within a window", and finds traps in 2 of 10 arithmetic runs (20%), 4 of 6 GSM8K runs (67%) and 6 of 16 runs overall (37.5%) — every one of which is a local re-expansion rather than a terminal divergence. This is the analysis that most nearly matches the roster-level trap rate. It is a point estimate of trap prevalence in the controlled data, not an upper bound (corrected; see Table E.1). The Wilson 95% CIs are [5.7%, 51%] for 2/10, [30%, 90%] for 4/6 and [18.5%, 61%] for 6/16, with runs as the unit.

A paired bootstrap on the Dr. GRPO minus GRPO difference in rank correlations gives, on arithmetic, $\Delta\rho$(step, len) = +0.098 with an interval of [+0.073, +0.119] — excluding zero: Dr. GRPO has a less negative step–length rank correlation than GRPO on the easy task (seed-paired bootstrap, n = 5). This indicates a weaker monotone downward association, not greater length compression; a correlation difference does not measure a token-length difference; $\Delta\rho$(step, reward) = +0.043 with an interval of [−0.024, +0.112], which is not significant; and $\Delta\rho$(len, reward) = +0.126 with an interval of [+0.045, +0.201], again excluding zero. On GSM8K the same three quantities are +0.267 [+0.164, +0.419], −0.020 [−0.069, +0.065] and −0.117 [−0.265, +0.015]. The exploratory reading is that Dr. GRPO has a less negative step–length correlation on both tasks. The length–reward correlation difference changes sign between tasks, but its GSM8K interval includes zero, so stronger coupling on the harder task is not established.

A decile-binned coupling analysis on GSM8K shows the mechanism directly: completions in the first length decile, spanning 153–180 tokens, earn a mean reward of 0.351,

while completions in the eighth decile, spanning 194–195 tokens, earn 0.233. Longer completions are rewarded less, which is the opposite of the verbosity-trap prediction. A 100-step cross-validation on the arithmetic metrics file returns ρ(step, len) = +0.41 and ρ(step, reward) = +0.27, but the absolute length range across that run is 0.08 tokens against a cap of 5 tokens — a positive correlation over a range too small to be a length effect.

The length–ZVF coupling analysis at iteration 12 is the most mechanistically interesting of the elevated results, because its sign flips between tasks. On arithmetic, ρ(len, zvf) is −0.449 [−0.584, −0.324] for GRPO and −0.291 [−0.428, −0.139] for Dr. GRPO; on GSM8K it is +0.286 [+0.231, +0.348] and +0.187 [+0.148, +0.225]. The Dr. GRPO minus GRPO difference is +0.158 [+0.075, +0.239] on arithmetic and −0.099 [−0.132, −0.041] on GSM8K. Conditioning ZVF on length bins makes the arithmetic structure concrete: the shortest bin has ZVF 0.92 and the longest 0.62, a drop of −0.30 [−0.34, −0.26], whereas on GSM8K the corresponding values are 0.30 and 0.41, a rise of +0.11 [+0.10, +0.13]. On the easy task, shorter completions are more often all-same-reward; on the hard task, longer ones are.

The mechanism analysis at iteration 20 fits, per run, a regression of step-level mean length on step-level mean reward. On arithmetic, Dr. GRPO reduces the slope magnitude: GRPO −3.65 ± 0.08 against Dr. GRPO −3.22 ± 0.15 (mean ± SD over 5 seeds). The paired differences below are recomputed from `platform_hybrid/experiments/results/length_bias_mechanism_per_run.tsv` as Dr. GRPO minus GRPO, paired by seed, n = 5 (corrected; see Table E.1). Each is given with a paired-t 95% CI, the paired-t p and the exact sign-flip permutation p; the permutation p cannot fall below 0.0625 at n = 5. The OLS slope difference is +0.43 [+0.18, +0.68], paired t p = 0.009, permutation p = 0.0625. The Theil–Sen slope difference is +1.11 [+0.33, +1.88], p = 0.017, permutation p = 0.0625. The ρ(L, R) difference is +0.10 [−0.02, +0.22], p = 0.080. The lag-1 autocorrelation is essentially unchanged, −0.01 [−0.27, +0.26], p = 0.94. On GSM8K (n = 3) the OLS difference reverses sign, −4.41 [−37.7, +28.9], p = 0.63, far too wide to interpret. The original fourteen-test family is not uniquely specified. Across all 120 choices of fourteen from the sixteen iteration-20 and window-10 iteration-24 tests, the smallest Benjamini–Hochberg adjusted p-value ranges from 0.116 to 0.487; none is below 0.05. Including all sixteen gives a smallest adjusted value of 0.132 (corrected; see Table E.1). The historical script also labels coefficient-product ratios of 42% and 55% on arithmetic and 28% and 12% on GSM8K as "proportion mediated". These are not supportable causal mediation estimates. The script multiplies a marginal correlation by a partial correlation and divides by another correlation; its "direct" quantity is also a partial correlation, so the terms are not common-scale path coefficients and need not add to the total. The same-step observational reward, length

and ZVF series also do not establish temporal or causal identification. The four percentages are retained only to identify the historical output, with the mediation interpretation withdrawn.

The drift analysis at iteration 24 closes the sequence. Windowed ρ drift on arithmetic is +0.326 for GRPO with p = 0.035, decomposing into an early −0.330 and a late −0.003, against +0.187 for Dr. GRPO with p = 0.399; on GSM8K the corresponding values are +0.019 with p = 0.905 and −0.084 with p = 0.769. The sign-flip analysis of late windows (w = 10) gives mean late non-negative fractions of 0.527 and 0.382 for arithmetic GRPO and Dr. GRPO and 0.048 and 0.000 for GSM8K GRPO and Dr. GRPO. Tested against one half with an exact two-sided sign-flip permutation over seeds, the p-values are 0.688, 0.625, 0.250 and 0.250 (corrected; see Table E.1). The unit is the seed, not the within-run window: each seed contributes one fraction, so n = 5 on arithmetic and n = 3 on GSM8K, where 0.250 is the smallest p the test can return. The GSM8K Dr. GRPO cell, in which not a single late window flips sign on any of the three seeds, therefore reaches only that floor. The source's p < 0.001 for it was a one-sample t-test on three identical values, whose zero variance gives $t = -\infty$. Across the 120 possible fourteen-test selections from the sixteen iteration-20 and window-10 iteration-24 tests, Benjamini–Hochberg leaves no test below 0.05, but the smallest adjusted value depends on the chosen family: 0.116–0.487, not an invariant 0.116 (`platform_modal/scripts/length_bias_iter24.py`; `platform_hybrid/experiments/results/length_bias_iter24_signflip.tsv`). The iteration-24 drift p-values above are unchanged. The iteration-20 and iteration-24 analyses are therefore exploratory throughout, with no multiplicity-surviving result.

6.5.4 Held-out generalisation and the scale extension

The pillar's held-out results are the part of the chapter closest to a conventional capability claim, and they are reported with corresponding care. The only multi-seed matched base-versus-RL control on Qwen3-8B is a five-seed comparison on Qwen3-8B-Instruct, which moves from 82.0% to 83.3% with p = 0.26. Stated as a mean improvement over the pre-RL checkpoint, the gain is +0.013 with a paired p = 0.256 at n = 5 — small and not statistically significant, and a matched pre-RL control for the Qwen3-8B-Base checkpoint is not available. In summary, on this near-ceiling configuration, GRPO does not produce a held-out improvement that can be separated from noise at the available seed budget, and that GRPO and Dr. GRPO produce held-out gains that are indistinguishable from each other at that budget.

The lower-accuracy configuration behaves differently and more conventionally. On Qwen2.5-1.5B-Instruct with GSM8K-CoT, both algorithms do produce significant pre-to-post held-out gains: +6.2 percentage points for GRPO and +5.0 for Dr. GRPO (n

= 3 seeds × 200 held-out items per arm). The unit of analysis is the seed. A one-sample t on the three per-seed deltas gives p = 0.0051 for GRPO (deltas +0.055, +0.060, +0.070) and p = 0.0099 for Dr. GRPO (+0.045, +0.060, +0.045). As supporting detail, per-seed McNemar exact p-values are 0.071, 0.036 and 0.016 for GRPO and 0.122, 0.017 and 0.122 for Dr. GRPO; no pooled McNemar p-value is used, because the same 200 items recur across seeds (corrected; see Table E.1). The McNemar detail also overstates what is attributable to training, because the greedy pre-RL evaluation is not deterministic: the six runs evaluate the same base model on the same 200 items before any training, yet their stored pre-RL correctness vectors take two distinct forms, 40/200 and 41/200, which disagree on 7 of the 200 items, including the GRPO and Dr. GRPO runs of the same seed (recomputed from `platform_hybrid/experiments/results/drgrpo_gsm8k_cot_full.json`). About 3.5% of items can therefore flip with no training at all, so some discordant pairs arise without training. The one-item difference in total accuracy between the two observed vectors does not bound the per-run measurement error at ±1 item. Seed-level t-tests summarise the variability present in these runs, but without repeated unchanged-checkpoint evaluations they cannot separate training-seed variation from evaluation noise or guarantee that the latter is adequately represented; the per-seed McNemar p-values remain supporting detail only. The two algorithms' gains do not differ (paired by seed, p = 0.25) (recomputed from platform_hybrid/experiments/results/drgrpo_gsm8k_cot.json; source: platform_hybrid/paper/sections/p4_results_intro.tex). This is the project's clearest evidence that the pipeline trains something real; it is reported alongside the near-ceiling null precisely because the contrast between the two configurations is what the pillar's bounded-null interpretation rests on. Across the same comparison, the pooled mean completion length drifts from 194.4 to 183.5 tokens, that is downward.

A scale extension tests whether the null survives when the cap is lifted. Qwen3-8B with LoRA rank 4 was run on GSM8K for 30 steps at G = 8 and batch size 4, three seeds per algorithm, with the completion cap raised fivefold to 1,024 tokens. All six arms compress: GRPO moves 1004 → 905, 981 → 944 and 996 → 900 tokens, and Dr. GRPO moves 999 → 931, 972 → 902 and 1000 → 878 — declines of between 3.8% and 12.2% in every arm. Late ZVF is 0.45, 0.70 and 0.72 for Dr. GRPO against 0.47, 0.47 and 0.55 for GRPO, and step-0 completions are approximately 98% of the cap. The step-0 saturation is the caveat that limits this extension: with completions already at 98% of the ceiling at the first step, the run starts truncated, and length compression under a binding cap is not the same phenomenon as length control in an uncapped regime. The pillar reports the extension as consistent with the null, not as an independent confirmation of it.

Finally, the P4-facing headline in the Miller-style error-bars audit is the iteration-136

arithmetic late-training-efficiency contrast. Late efficiency is training-reward gain per unit of length change. The contrast is Dr. GRPO minus GRPO, paired by seed, n = 5, with mean difference +0.020. Recomputed from `length_bias_iter136_step_coupling.tsv`, the effect size is d_z = +2.68, the mean paired difference divided by the SD of the differences. The exact one-sided Wilcoxon signed-rank p is 0.031, which is 1/32, its floor at n = 5 (corrected; see Table E.1). The paired t that matches d_z gives t(4) = 5.96, two-sided p = 0.004. The two-sided exact sign-flip p is 0.0625, again the n = 5 floor: all five pairs point the same way, yet the non-parametric test cannot reach 0.05 two-sided. The contrast was one of eight directional hypotheses in the iteration-136 family (four per task). Under Holm correction across the eight, the family's own Wilcoxon p becomes 0.25. This chapter therefore grades it *suggestive*, not decisive (corrected; see Table E.1): a consistent direction across five seeds on a training metric, with two-sided non-parametric p = 0.0625 at n = 5. The audit's three NULL verdicts fall on Pillar-1 and Pillar-3 headlines rather than on this one. The pillar also records its own limitations plainly: a single-benchmark held-out evaluation, a single-seed top-10-checkpoint frontier comparison, weak length identifiability, and marginal paired tests.

6.5.5 Same-stack rerun on the unsaturated configuration

The same-stack PPO/GRPO and group-size nulls of §6.2.3 and §6.4.1 sit at evaluation accuracy near 0.99, where a null cannot separate no effect from no headroom. To test the contrasts where headroom exists, they were rerun on 2 October 2026 on the configuration of §6.5.4: Qwen2.5-1.5B-Instruct, GSM8K with a boxed-answer correctness reward and a 200-token chain-of-thought cap, LoRA rank 16 on the attention projections, learning rate 1×10^{-5}, 30 steps, two inner epochs of the clipped surrogate with per-response length normalisation, on one A10G per run. Three arms share that stack and a fixed count of 64 generations per step, but differ in advantage estimation, critic training and distinct-prompt exposure: GRPO with G = 8 (8 prompts × 8 completions), GRPO with G = 2 (32 × 2), and PPO with a learned value head on the prompt-end hidden state (64 × 1, value loss 0.5 × MSE, batch-normalised advantage). Each run evaluates the same 200 GSM8K *test* items greedily before and after training, so the evaluation set is disjoint from the training split. Five paired seeds were run per arm; the unit is the seed, and the analysis, including a ±2-point equivalence margin, was fixed in the script before launch.

Same-stack rerun on Qwen2.5-1.5B-Instruct GSM8K-CoT, five paired seeds, 200 test items.

Table 6.1: Same-stack rerun on Qwen2.5-1.5B-Instruct GSM8K-CoT; paired-t intervals over five seeds. The PPO arm is a minimal untuned critic (no warm-up/GAE/tuning) seeing 8× as many distinct prompts per step as GRPO G = 8, under a near-binding 200-token cap; the contrast is not a verdict on PPO versus GRPO as algorithms. Exact sign-flip p = 0.0625 (n = 5 floor) precedes paired-t p = 0.016 wherever this gap is quoted. Stored pre-training accuracy is identical across these seeds under greedy evaluation on a fixed item set; greedy decoding alone does not guarantee implementation-level determinism.

Arm	Accuracy before → after	Change (95% CI)	Last-10 training reward
GRPO, G = 8	0.200 → 0.245	+0.045 [+0.033, +0.057]	0.270
GRPO, G = 2	0.200 → 0.250	+0.050 [+0.026, +0.074]	0.275
PPO, learned value head	0.200 → 0.195	−0.005 [−0.033, +0.023]	0.196

Both GRPO arms improve on every seed, which reproduces the +6.2-point GRPO gain of §6.5.4 at a similar size. The PPO arm shows no detectable held-out gain: its training reward drifts down and its post-training accuracy is indistinguishable from the starting point. After training, GRPO at G = 8 exceeds the minimal untuned-critic PPO arm by +0.050 [+0.015, +0.085], with the exact two-sided sign-flip p at its n = 5 floor of 0.0625 reported first (all five seed differences positive; the exact test cannot reach 0.05 at n = 5) and the paired-t p = 0.016 second. GRPO at G = 8 and at G = 2 differ by −0.005 [−0.038, +0.028] (p = 0.69); that interval is wider than the ±0.02 margin, so equivalence is not established either (TOST p = 0.13).

The PPO result has a narrow reading. The PPO arm is the minimal one that matches the GRPO arms' stack: a linear value head trained from zero for 30 steps at the policy's learning rate, with no critic warm-up, no generalised advantage estimation and no tuning. Its advantage is therefore close to batch-centred reward with a noisy baseline, so what the contrast shows is that on this fixed stack and budget the group-relative baseline shows a held-out gain and this minimal learned-critic baseline shows no detectable gain. It is a single-configuration result with five seeds, not a verdict on PPO with a tuned critic, and the 64-prompt PPO batch also sees eight times as many distinct prompts per step as GRPO at G = 8. The paired-t result depends on a small-sample parametric approximation; the exact two-sided sign-flip result does not reach 0.05. Both describe seed variation on the same fixed 200-item evaluation slice, not uncertainty over GSM8K items or model/task families. Fixed generation counts are not measured equality of generated tokens or total compute. Mean training completions are 190.16 (G8), 191.62 (G2) and 194.16 (PPO) tokens under cap 200, with PPO last-ten length 196.19; non-ceiling accuracy does not establish a non-binding length regime. For group size, the rerun removes the accuracy-saturation objection and still finds no detectable effect between G = 2 and G = 8 at this budget, without establishing that none exists.

6.6 Cross-Pillar Observations and Limitations

Three observations span the four pillars and are worth stating together, because the chapter's overall contribution is better captured by their pattern than by any single number.

First, the project's strongest results are its de-confounds, and its de-confounds mostly return nulls. The matched same-stack PPO-versus-GRPO contrast, a pilot/feasibility result only, returns a seed-paired difference of −0.002 (exact sign-flip p = 0.625; paired-t p = 0.374; n = 5 seeds, arms evaluated on largely different items, at a near-ceiling accuracy, not shown equivalent by TOST at ±0.005); the four-axis factorization audit attributes η^2 = 0.023 to the algorithm axis and η^2 = 0.54 of last-10 training-reward variance to the group-size axis (F(3, 8) = 3.08, p = 0.09, n = 12 runs); the controlled length-bias comparison returns zero length-bias flags across sixteen runs. The arithmetic PPO contrast retains prompt-exposure and evaluation-overlap confounders, while the primary G sweep fixes prompts and steps rather than completion or token counts (§4.3). Those two contrasts use saturated 0.5B arithmetic at evaluation accuracy 0.98–0.99. The sixteen-run length comparison additionally includes six GSM8K-CoT runs, whose 200-token cap binds a different limitation (§6.5.1). These designs found no detectable advantage on their respective contrasts, with the stated confounds and limits. The group-size axis carries the largest variance share, but at n = 3 seeds per arm it does not reach significance on either training reward or held-out accuracy. It is also a hyperparameter rather than an algorithm choice. The chapter's empirical conclusion is therefore conditional on saturation: on a 0.5B arithmetic task at evaluation accuracy near 0.99, no algorithm-label effect was detectable, which cannot distinguish "no effect" from "no headroom"; the sampling configuration is the more plausible lever but was not shown to matter at this seed budget. Rerun on the unsaturated Qwen2.5-1.5B GSM8K-CoT configuration (§6.5.5), the picture changes for one contrast: GRPO at G = 8 exceeds a minimal untuned learned-critic PPO (8× prompt exposure) by +0.050 [+0.015, +0.085] (exact sign-flip p = 0.0625, the n = 5 floor; paired-t p = 0.016), while the minimal PPO arm shows no detectable gain on this budget; G = 2 and G = 8 remain indistinguishable without being shown equivalent.

Second, the diagnostics and interventions are less prescriptive than their motivating literature suggests, and the project says so. ZVF reproducibly counts homogeneous or near-homogeneous reward groups under its declared definition. The reported catastrophic-collapse association (ρ = 0.56, 95% CI [0.19, 0.79], n = 23 cells) and nominal graded-outcome association (ρ = 0.27, 95% CI [−0.37, 0.88], historical n = 23) come from a mixed-source table. Both calculations drop six missing-ZVF cells, leaving seventeen finite cells, nine synthetic, and mixes outcome definitions (§6.3.4); they cannot establish diagnostic reliability on measured runs. Independently of those correlations, the

definition is unsigned and cannot distinguish mastery from incapacity. The difficulty curriculum, group-size sweet spot, length-bias loss formulations and step-1 layer freeze establish no reliable held-out advantage in their respective checks; only the explicitly matched-token comparisons support a matched-cost reading (§6.4.3), and two of them (the curriculum and the G = 4 win) were flagged as SUSPECT by an independent verification pass before multi-seed re-testing failed to reproduce either advantage reliably. Reporting an intervention as a null after an independent reviewer flagged it as overclaimed is, in this project's convention, part of the result.

Third, the single-seed regime is the dominant shared limitation. The cross-scale anchors are single-seed and descriptive. The roster-level verbosity-trap audit is single-seed per configuration, and its in-training reward metric is not a held-out one. The P3 sweep, the P4 controlled comparison, both same-stack comparisons, the five-seed Qwen3-8B held-out control and the P4 scale extension operate at $n \geq 3$, and the Qwen3-8B control is the only multi-seed matched base-versus-RL comparison on Qwen3-8B; the Qwen2.5-1.5B GSM8K-CoT pre/post runs and the small-sample pairs of Table 8.B are the other base-versus-trained comparisons. Every headline in this chapter is therefore stated at the strength that its own evidence base supports, which is in several cases weaker than the strength at which it would need to be stated to generalise beyond the named stack. The reconstructions (G = 32 and above in P3, the T = 64M grid, the difficulty-gated saving projection) are held at hypothesis-generator status for the same reason: they are joint-fit extrapolations, not trained arms, and the project declines to let them carry a recommendation.

Taken together, the four pillars establish no general algorithm ranking: the unsaturated PPO contrast is baseline-specific and test-sensitive, while the group-size contrasts remain unresolved at these seed budgets. The method's most widely repeated specific failure mode — length inflation — is absent in the regimes where it was tested directly and is not established by the roster flag, which is not specific to length. That is a narrower and more cautious set of conclusions than the P1–P4 internal reports set out to establish, and the chapter reports it as such.

Chapter 7

Results II: Reporting, Registry and Controller (P5–P7)

The three internal reports covered in this chapter form a chain rather than a set of independent results. P5 makes a claim about the epistemic status of reinforcement-learning results for language models and proposes a checkable reporting standard to match it. P6 turns the standard into a machine-readable artifact with a validator, a badge and a diff tool. P7 takes the diagnostic that the standard requires authors to publish — the zero-variance fraction (ZVF) — and asks whether it is mechanistically predictable and ready to control rollout allocation. Each report is explicit about where its claim stops, and this chapter reports their evidence in the same register.

7.1 A Minimum Reporting Standard for Stack-Conditioned Results (P5)

P5's position is that results in this field are *stack-conditioned*, and that reporting the framework or algorithm label without the stack is therefore insufficient to support the claims that are routinely made from it. The evidence for that position is not a single demonstration but a family of levers, each showing that varying one component of the stack, with the label held fixed, moves or flips the reported outcome or its telemetry.

The cleanest lever is a managed 12-cell head-to-head: four group-relative labels (GRPO [11], DAPO [22], Dr. GRPO [21], GSPO [23]) run on one stack — Tinker-managed, Qwen3.5-4B, GSM8K, three seeds per arm. Mean last-10 training reward spans 0.710 to 0.744, a band of 0.034, with per-arm values of 0.744 (DAPO), 0.742 (Dr. GRPO), 0.723 (GRPO) and 0.710 (GSPO); mean ZVF over the same arms is 0.578, 0.500, 0.567 and 0.511. The labels move telemetry by more than they move outcome, and neither

movement is large.

The largest lever in the corpus is an outcome flip of 5.0% to 85.6% final training reward under a fixed label when the backend is changed. That figure must be read with its provenance caveat attached, because the same inspection that surfaced it also found that the nominal backend comparison bundled a different base checkpoint: Qwen3-8B-Base on the managed Tinker run against the instruction-tuned Qwen3-8B on TRL. The number is therefore evidence that item 3 of the standard must record backend *and* checkpoint identity; it is not a causal estimate of the backend alone. A second same-label lever points the other way: the label "DAPO" produced mean ZVF 0.00 on an open trainer running true dynamic sampling and 0.58 on a closed stack running an asymmetric-clip surrogate.

These exhibits are summarised by a variance decomposition, and its design has to be read with it. The algorithm term comes from the four-method same-stack N2 run (GRPO, AERO, GIFT, AREAL; one seed; 40 steps each, so 4 groups of 40 per-step observations, n = 160, df = 3 between and 156 within): $\eta^2 = 0.0454$ on ZVF, with a within-method (stratified) step-bootstrap CI of [0.0094, 0.1476], and $\eta^2 = 0.0075$ [0.0019, 0.0790] on mean reward (corrected; see Table E.1). The source interval was drawn from the pooled steps, so it described a null band rather than the estimate's uncertainty. The corrected ZVF interval therefore does not support the reading that the algorithm explains at most about 6% of ZVF variance: an algorithm share of up to roughly 15% is compatible with these data, and the source's DECISIVE grade on this term falls to SUGGESTIVE. Even the corrected intervals are too narrow, because the steps are autocorrelated within a run and those 156 within-group degrees of freedom overstate the independent information (recomputed by `platform_modal/scripts/p5p8/p5_headline_cis_full.py`; output `platform_hybrid/experiments/results/p5p8/p5_headline_cis_full.tsv`). No group-size term is reported from this decomposition: the group-size file, `groupsize_zvf_sweep.tsv`, holds one row per G level (4 cells, one observation per cell, df = 0 within), on which any one-way decomposition returns $\eta^2 = 1$ by construction (corrected; see Table E.1). The 98-cell mega-campaign decomposition is an unbalanced partial grid (98 of 120 cells over model family, task slice, G, temperature and seed, with two seeds). Its four stack axes account for 72.9% to 92.7% of the variance in the five logged metrics; the seed axis rounds to 0.000, so no stack-to-seed ratio is quoted as an effect size (corrected; see Table E.1).

The standard that P5 proposes has eight items — seven run-manifest fields and one evaluation item — and each item earned its place by exhibiting a documented lever of this kind. Item 1 is the loss form, reported as a tuple of ratio level, clip low and high, token mask, advantage normalisation and dynamic-sampling status — the same label with and without dynamic sampling produced opposite ZVF telemetry (0.00 against 0.58).

Item 2 is the reference policy and KL handling, which distinguishes family members that are otherwise conflated and whose omission is unrecoverable after the fact. Item 3 is the sampler, backend and precision, including base-checkpoint identity, motivated by the 17× exhibit above. Item 4 is the per-step ZVF and gradient-utilisation trajectory, because a single mean aliases opposite regimes: across the 368-run audit (Stratum B, W&B project `zvf-audit`, 350 runs with logged final metrics), mean ZVF is 0.97 and 0.95 for two low-reward models (Llama-3.2-1B and Llama-3.2-3B), falls to 0.25 and 0.29 at mid-range rewards, and rises again to 0.87 and 0.96 for two near-saturated models. Item 5 is the group-size schedule, since group size is a signal-geometry knob rather than a throughput knob; measured mean ZVF for Qwen3-32B falls from 0.33 at G=4 to 0.18 at G=8 and 0.08 at G=16, and for Llama-3.1-8B from 0.76 to 0.65 to 0.47, while the two boundary cases compress the effect as the theory predicts. Item 6 requires a held-out split disjoint from the reward environment. Item 7 requires a contamination check and a parser-robustness probe: adding micro-jitter $\delta \sim \mathrm{U}(0,10^{-4})$ collapsed the *exact-tie* fraction from 95/600 (0.1583) to 0/600 while pairwise contrast density changed negligibly. Recalculation with the declared sample-variance tolerance $\varepsilon = 10^{-6}$ instead leaves ZVF at 95/600 before and after jitter (§6.3.1). The example demonstrates sensitivity of exact ties to rounding, not failure of the tolerance-based diagnostic.

Item 8 is deliberately different in kind: held-out pass@k curves at $k \in \{1, 8, 32\}$ belong to the evaluation report rather than to the run manifest. The lever here is a matched base-versus-post-RL panel — four adapters at $G \in \{2, 4, 16, 32\}$, one stack, the same problems — on which pass@1 deltas scatter from −0.5 to +1.9 points (under which reading the G=2 arm would be called a regression) while the pass@32 frontier improves by +1.5 to +2.5 points in all four arms. Neither reading reaches significance at a single training seed, which is itself the argument: without pass@k curves and stated noise bands the same panel supports any narrative the reader prefers.

P5 also ships the machinery that makes the standard enforceable rather than advisory. An auditor scores a manifest against the eight items and emits a 0–100 weighted badge; on an n=103 audit the weighted total was 55.0 with a badge span of [35.8, 56.7] and standard deviation 3.1, awarding zero gold, zero silver, 99 bronze and 4 wood. Coverage, however, is where the negative result lies. On 98 manifests, every one of the seven manifest fields is present as a key 100% of the time, yet item 2 is *validated* in 0 of 98 cases (0.0%), and all twelve of its sub-fields are present at 0 in each case; nine of the sub-fields across items 1 and 2 — advantage normalisation, clip high, clip low, dynamic sampling, KL coefficient, KL estimator, ratio level, reference snapshot and token mask — sit at 0.0% with zero information content. Twenty-three sub-fields examined across the population show no field at a full null rate, but twenty of the twenty-three carry at most two distinct values, and the twenty entries collapse to ten distinct 23-bit fingerprints.

Two further analyses bound what the standard can be expected to buy. The first is a discriminative-entropy audit: four of the seven manifest fields are vacuous on this corpus — loss form, reference policy and KL, sampler/backend/precision, and decontamination notes each carry too little task-discriminative information to distinguish runs — while the per-step ZVF path and the group-size schedule carry the information. A field-sufficiency regression agrees: a random forest on the disclosed stack fields, scored by out-of-fold R^2 over the 98 cells (8-fold cross-validation, 8 fold seeds), predicts ZVF at $R^2 = 0.832$ [0.772, 0.879] and mean reward at $R^2 = 0.993$ [0.990, 0.996]. The label-only comparator is $R^2 = 0.000$ by construction, because all 98 cells share one algorithm label, so it is a floor rather than a competing model. The second is a manifest self-sufficiency test, and it splits sharply by metric. The manifest carries essentially all of the ZVF signal ($R^2 = 0.776$ [0.730, 0.846] against 0.773 [0.735, 0.834] for the cells, $\Delta R^2 = -0.003$ [−0.045, +0.034]) but only a minority of the reward signal ($R^2 = 0.280$ [0.219, 0.443] against 0.743 [0.688, 0.820], $\Delta R^2 = +0.463$ [+0.309, +0.564]); all 98 cells are therefore labelled `honest_but_vacuous` on the three-axis triangulation.

The most useful negative in P5 is the placebo-replacement bound. The four-of-seven vacuity pattern admits two readings: the schema chose the wrong items, or any stack-descriptor schema would be vacuous on a single-stack corpus. Projecting six candidate replacement items onto the live corpus supports a narrower conclusion: the four invariant hyperparameter candidates do not repair its lack of variation. Four of the six — KL coefficient, clip range low, advantage normalisation and mini-batch size — project to exactly one unique value on the 98-cell corpus with a bootstrap CI excluding any positive information gain, because the corpus never varies them; temperature schedule would add 0.995 bits to the sum of marginal field entropies, lifting that sum from 11.41 to 12.41 bits, and a model-family label is redundant with an existing column. The variance partition confirms it: stack axes explain $\eta^2 = 0.947$ of ZVF variance across 25 unique buckets, with 5.3% seed residual and an algorithm term of zero by construction. This establishes a limitation of this corpus and these candidates, not the optimality of the schema. The reported 11.4 bits sum marginal field entropies; they are not the joint information in the fingerprint. The stored field table assigns 6.6147 bits to the unique per-cell telemetry path, 2.3121 to group size, 1.5546 to held-out split and 0.9313 to decontamination notes; the other three fields are constant. Excluding the identifier leaves 4.7980 summed marginal bits, which can still count shared information more than once. Hamming distance over the fingerprint is associated with the absolute difference in ZVF (Spearman $\rho = +0.44$), PCD ($\rho = +0.39$) and mean reward ($\rho = +0.28$) across all 4,753 cell pairs, while the badge itself is constant across cells and cannot discriminate seed-pair dispersion ($\rho = +0.000$, n = 48 pairs). Because pairs that share a cell are not independent, significance comes from a Mantel test that permutes cell labels jointly on the distance

matrix (9,999 permutations): $p < 10^{-3}$ for all three outcomes, and the association holds when seed replicates are averaged into 50 configurations (ρ = +0.47, +0.43, +0.32). The Hamming distance takes only four values and is in effect a function of group size and task, so the test shows that cells differing on those fields differ in outcome, not that the fingerprint adds information beyond them. The source paper's ZVF and PCD values (ρ = +0.529 and +0.541) could not be reproduced: its own analysis script gives +0.407 and +0.336 on a 2,000-pair sample, and the full-matrix values are those above (corrected; see Table E.1).

7.2 The GRPO-Registry (P6) — a schema proposal

> **Status (19 October 2026).** The registry and badge are a *schema proposal*: they have not been validated against any external corpus, and their consistency on the project's own twenty seed entries is a closed-system check, not external validation. `stackdiff` outputs R0–R5 are *declared-difference codes* (formerly "flip-risk verdicts"), not calibrated label-flip probabilities.

P6's premise is that the deltas defining GRPO variants — DAPO's asymmetric clip, dynamic sampling and token-level loss; Dr. GRPO's dropped length and standard-deviation normalisation; GSPO's sequence-level importance ratio [23] — live in paper appendices and framework defaults rather than in any machine-readable form. The registry is the response, and it ships as three artifacts at `registry/`: `schema.json`, `entries/*.json` and `query.py`.

The schema defines two record types under a single `oneOf`, both carrying `schema_version`. The stack record's core is `min_report`, one sub-object per minimum-report item, with base-checkpoint identity required inside the `sampler_backend` block precisely because the audit that motivated item 3 found a managed backend silently pinning a different base checkpoint. Two design decisions carry weight. The first is the distinction between an unreported field and a field reported as absent: a null means the author said nothing, whereas an explicit `false`, `0.0` or `"none"` means the author made a checkable claim — "a stack that says 'we use no KL term' is making a checkable claim; a stack that says nothing is not." The second is that item 8, the held-out pass@k requirement, is attached under outcomes as an evaluation-report field rather than folded into the run manifest, preserving the eight-item standard's split between what describes a run and what describes a result. Per-component delta status is recorded on the stack side in `variant_deltas_applied`, with each entry's status drawn from {implemented, surrogate, absent, unknown}. The shipped entry for the managed DAPO run makes the point concretely: `clip_higher` is recorded

as surrogate with the note that the asymmetric clip was set through the user-facing config while the underlying managed loss form is unverifiable, dynamic_sampling is recorded as absent, and token_level_loss is unknown because it is managed by the runtime. An optional ci_method object (method, bootstrap count, seed, confidence level, source) is populated on the seven derived entries with n_boot = 2000 and a percentile 95% interval, and left null on the remaining twenty-four.

Three variant-delta records were verified against their source papers: DAPO with five components (clip higher at ε_low = 0.2 and ε_high = 0.28, dynamic sampling, token-level loss, overlong reward shaping, KL removed); Dr. GRPO with two removals (the 1/|o_i| response-length normalisation in the loss and the division by the within-group reward standard deviation in the advantage); and GSPO with a length-normalised sequence-likelihood importance ratio and sequence-level clipping.

The seed population is twenty stack records in five families, all of which pass validation. Family A holds four framework config dumps (Qwen3-8B, GSM8K, seed 42) scoring badges 74, 60, 60 and 62; family B holds the four open Colab trainer arms at toy scale, scoring 96, 96, 96 and 96; family C is the managed head-to-head at 57, 62, 62 and 60; family D contributes three variant records from a same-stack four-method run at 67 each; and family E contributes five method records from a five-seed risk-index batch at 43 each. The family sizes are therefore 4 + 4 + 4 + 3 + 5 = 20. The finding worth stating plainly is why the ordering looks the way it does. The config dumps were assembled for a reviewer-requested fairness audit and score only 57 to 74: they nail items 2, 3 and 5, expose item 1 only partially, and cover items 6 and 7 not at all. The open Colab arms score 96 not because the runs are better but because an open backward pass, coupled with explicit declarations that no KL term and no decontamination check were used, makes every field reportable. Reproducibility supplements of the kind commonly shipped with RL papers do not automatically satisfy MIN-REPORT.

The health audit is the registry's own evidence that it works. Every record shipped with P6 parses: 31 of 31 pass, comprising 20 stack records and 11 variant-delta records, with zero broken delta pointers. The delta-mix table is the sharpest single result in P6: the label "DAPO" is claimed by ten entries, of which four implement a delta, one records a surrogate, three record it as absent and two record it as unknown — the same label covering four distinct implementations (Table tab:p6-delta-mix). Per-item coverage on the twenty stack records is 100% for the held-out split (40/40), 95% for sampler/backend (76/80), 90% for telemetry (54/60), 68% for the group-size schedule (41/60), 48% for reference policy and KL (29/60), 32% for the loss form (38/120) and 20% for decontamination (8/40) (Table tab:p6-coverage). The per-openness breakdown inverts the conventional expectation: the open subset records sampler/backend at 91.7% and telemetry at 83.3% with reference KL at 58.3%, while the managed subset records sam-

pler/backend and telemetry at 100% but reference KL at 33.3% and the loss form at only 22.9%.

The registry was stress-tested rather than asserted. A batch of adversarial perturbations with B = 4000 bootstrap resamples — 13 categories × 31 entries × 10 mutations = 4,030 generated, of which 800 were no-ops for their entry and were skipped, leaving 3,230 applied — moved the overall robustness statistic from 0.864 [0.756, 0.878] before the corresponding schema bumps to 1.000 [1.000, 1.000] after them, closing three silent-failure categories: a missing identifier pattern check (0.645 to 1.000), MIN-REPORT leaves declared in `properties` but not in `required` (0.000 to 1.000, fixed by promoting key presence to a schema invariant), and free-form delta references (0.000 to 1.000, fixed by replacing `delta_id` with an enum generated from the entry filenames). A separate consistency check cross-references the variant-delta records against the MIN-REPORT blocks: of 31 triples from 13 entries, 7 are MATCH, 0 are MISMATCH, 0 are MISSING_REPORT, 5 are SURROGATE_OBS and 19 are NOT_APPLICABLE, giving an implementation-honesty match rate of 7/7 = 1.000 with a Wilson 95% CI of [0.65, 1.00] (a percentile bootstrap of 7/7 is degenerate at [1, 1]).

The empirical payoff of the schema is the same-stack measurement. Re-executing four GRPO-family methods (GRPO, AERO, GIFT, AREAL) on a single identical stack — managed sampler, G = 8, seed 0, 40 steps, 16 prompts per step — with the full per-prompt reward tensor logged at every step, produces reward deltas of magnitude ≤ 2 percentage points. Two of the three show within-run intervals that exclude zero on the side of a *decrease* (AERO at −0.014 [−0.023, −0.005] and AREAL at −0.020 [−0.032, −0.008]). Those intervals are paired bootstrap intervals over the last 10 of 40 steps of a single seed-0 run per method, so they carry no seed variance and are not replication. GIFT's delta is +0.016 [−0.007, +0.040]. Exact sign-flip tests over the same 10 paired steps, Holm-adjusted across the three contrasts, give p = 0.047 for AERO, 0.047 for AREAL and 0.23 for GIFT; when prompt-level variation is included (160 paired prompt-steps), the AERO decrease is no longer distinguishable from zero (Holm p = 0.20) (corrected; see Table E.1). The magnitude thesis survives. Whether any difference exceeds seed-to-seed noise was not tested, so neither the claim that all differences are within noise nor its negation is established. The largest same-stack effects are not on reward at all: AERO and AREAL lengthen completions by approximately 31 tokens and tighten the length coefficient of variation, and GIFT's loss shift of -1.67×10^4 is a baseline constant. A later registry extension measures the anti-herding residual $\delta_{\text{div}} = \text{ZVF}^{\text{iid}} - \text{ZVF}^{\text{obs}}$ on the same tensors, reporting a stack-mean of 0.049 with a range of [0.039, 0.053]; GIFT's estimated reduction against GRPO has p = 0.066 and CI [−0.021, +0.001], so it is not established at the 0.05 level. The computed residuals are smaller than the synthesis range of [0.13, 0.23]; they remain deviations from a plug-in independence baseline, not

independently identified causal diversity benefits.

The reference CLI, `registry/query.py`, includes `list`, `query --item reference_kl`, `badge` and `stackdiff`, alongside later audit commands. Its implemented comparison scope is narrower than complete manifest identity: it scores sampler/backend differences, loss-form and reference-KL differences, and variant statuses keyed by delta identifier and component. The highest triggered level is returned. R0 means that these scored fields do not differ; R1 has a defined nuisance-only label but no selecting code path; differing sampler/backend fields trigger R2 even when a value is null; differing loss/KL fields trigger R3 when both are reported and R5 when a value is null; differing variant statuses trigger R4, or R5 if a status is unknown. The legacy R0 display calls the manifests identical even when an unscored model, task or decontamination field differs. The later ESA companion narrows this display to "no differences in scored fields" and prints identity and remaining MIN-REPORT differences as unscored, without changing the numeric rules. These behaviors are executable software observations, not an effect-size or scientifically calibrated risk scale.

The badge weights the seven blocks equally and is outcome-blind: $\text{badge}(s) = \text{round}(100 \cdot \frac{1}{7} \sum_i c_i(s))$, using Python rounding. Each c_i is the fraction of the block's immediate values that are non-null, not a recursive count of all nested leaves. The earlier floored formula was a documentation error. A synthetic six-complete-plus-one-half-complete input gives 93 rather than floored 92; existing stored badge values are unchanged. `stackdiff` prints its attribution warning at R4 and above. On the two retained DAPO records in the ESA companion, the implemented badges are 96 and 65 and the pair remains R5. This reproduces the program's response to stated provenance, not the truth of the records or the comparability of their experiments. The broader historical P6 report describes a 43–96 badge span across twenty seed entries; that corpus-wide claim was not rerun in the selected companion.

The registry cannot reconcile unresolved exact-ID or model conflicts, validate nominal algorithm comparisons, or establish missing decontamination evidence. An unscored difference can still be decisive for a particular scientific question. R0 therefore cannot be used alone as an acceptance criterion for causal attribution. The badge is also coarse relative to the historical corpus: twenty entries collapse to ten distinct fingerprints, and twenty of twenty-three sub-fields carry at most two values. Completeness and scientific validity remain separate.

7.3 From Diagnostic to Controller (P7) — controller unevaluated as a training policy

> **Status (19 October 2026).** The adaptive-G controller is *unevaluated as a training policy*: no matched-budget, multi-seed, held-out bakeoff against a strong static baseline was run. The retrospective "zero rescue" is a tautology of the plug-in estimator — substituting $\hat{p} \in \{0, 1\}$ (461/640 GRPO prompt-step groups) into h_G forces the estimated degeneration probability to 1 for every G, so that calculation could never have found rescue; the eight-controller posterior-predictive ranking below is model-based accounting under that misspecified boundary, retained as a negative design lesson, not as controller evidence. P7's $S = p(1-p)(1-h_G(p))$ is read as a *model / accounting identity*, not a "signal-starvation theory".

P7 asks a narrower question than P5 and P6. Given that the zero-variance fraction is worth reporting, is it mechanistically predictable, and is it ready to control rollout allocation? The P7 report's own framing is that this does not overturn the descriptive restraint of the earlier work — it *tests* ZVF's predictive value through falsifiable predictions rather than assuming it — and it flags at the outset that the weakest link in the chain, the causal connection from within-group contrast to gradient magnitude, rests on toy-scale directional evidence only.

The model (an accounting identity, not a theory of learning) is compact. Fix a prompt with latent per-rollout success probability p and a group of G conditionally independent Bernoulli rewards. Write $h_G(p) = p^G + (1-p)^G$ for the probability that the group is degenerate, and model the usable signal per prompt as $S(p, G) = p(1-p)(1-h_G(p))$. The first factor is the Bernoulli reward variance; the second is the probability of a non-homogeneous group under the stated model. Their product is a proposed proxy, not an identity for the expected gradient or for contrast conditional on a non-degenerate group. Both factors vanish at the endpoints and peak at p = ½, so this proposed signal proxy is largest at intermediate latent success probability and vanishes at the endpoints; it is not a measured law of learning speed. Three consequences follow, each paired with the measurement that could have falsified it. T1 states that the expected ZVF indicator is exactly $h_G(p)$. T2 states that h_G is strictly decreasing in G for $0 < p < 1$, with exponential decay rate $-\ln \max(p, 1-p)$. T3 states that with unnormalised group-centred advantages the mean absolute advantage in a group is exactly $2\hat{p}(1-\hat{p})$.

The checks have different evidential status. Binning by the same group's empirical success rate is an algebraic identity, not an independent validation of latent-p predictions. For T1, binning the per-group reward tensors of the GSM8K runs by empirical success

rate gives a ZVF indicator averaging 1.000 at $\hat{p} \in \{0, 1\}$ and 0.000 at every interior bin; at run level, measured ZVF sits *above* $h_G(\bar{p})$ at every G, which the P7 report attributes to the Jensen gap — the binomial model evaluates h_G at the mean p while the prompt population can mix different latent success probabilities. The Jensen gap explains only part of it. On the repository sweep the measured ZVF also sits above the per-step-average null, which already absorbs the across-step variation in p: 0.838 against 0.828 at G = 2, 0.764 against 0.709, 0.691 against 0.597 and 0.631 against 0.522 at G = 16, recomputed from `groupsize_zvf_sweep.json`. This is the same baseline used in Chapter 6 §6.3.3 and Chapter 4 §4.3. For T2, two independent grids agree. The 368-run audit shows monotone decline for every model with an interior success rate (Qwen3-32B 0.33 → 0.18 → 0.08; Llama-3.1-8B 0.76 → 0.65 → 0.47), with the two boundary rows behaving as the theory flags them: Llama-3.2-1B sits near p ≈ 0 where $h_G \approx 1$ regardless of G (0.98 → 0.97), and Qwen3-4B-Instruct sits near saturation where the decay rate is tiny and seed noise dominates, producing the single non-monotone cell (0.89 → 0.84 → 0.91). The repository-internal sweep at G ∈ {2, 4, 8, 16} shows the same decline, with mean ZVF falling from 0.838 to 0.631 while held-out accuracy stays essentially flat near 0.98 throughout — raising G buys signal, not, on this near-saturated task, outcome. T3 is an algebraic identity for the stated advantages. The separate link to gradient magnitude cannot be checked on the closed stack, which does not expose per-group gradients; the open-backward-pass measurement, corr($\|\nabla\|$, $\hat{p}(1-\hat{p})$) = +0.71 on a 0.5B model with synthetic arithmetic, is reported strictly as directional evidence.

The P7 report proposes pairwise contrast density, with model expectation PCD = ((G−1)/G)·E[p(1−p)], as a magnitude-aware candidate control signal. PCD is also symmetric under p ↔ 1−p and vanishes at both endpoints, so it cannot by itself distinguish mastery from incapacity; reward level must be reported alongside it. The micro-jitter experiment in §7.1 motivates recording the metric definition: the exact-tie fraction falls from 0.158 to 0.000 while PCD is nearly unchanged, but $\text{ZVF}_{10^{-6}}$ remains 0.158. This experiment alone does not establish that PCD is a better control signal than tolerance-based ZVF. The controller's design follows from the theory: a `zvf-triage` callback watches per-step ZVF with PCD as an aliasing guard, and an adaptive-G controller escalates group size on ZVF spikes, changing only the sampler budget so that it composes with any group-relative objective.

The four-arm open-trainer audit measures the intervention against alternatives on the same task and reported seed setup, with different rollout budgets. Against a 120-rollout baseline, GRPO gains +0.500 held-out at mean ZVF 0.25; Dr. GRPO gains +0.575 at 0.27 on the same 120 rollouts; DAPO-style dynamic sampling gains +0.550 while driving ZVF to 0.00 at 174 rollouts, a +45% cost; and adaptive-G gains +0.575 while lowering mean ZVF only modestly to 0.23 at 186 rollouts. Three readings are stated.

Telemetry behaves as the mechanisms dictate. Dynamic sampling buys perfect telemetry at a 45% rollout premium and does not exceed the cheaper fixed recipe. Adaptive-G spends comparable overhead and ties the best held-out result, concentrating its spend on flagged steps — and the tie is small-n and single-task, so the description is "competitive with, not superior to, the best fixed recipe."

The controller simulation then asks a counterfactual question on the real reward tensors: for each of the 2,560 prompt-step decisions in the four-method run, when would each controller have fired, what group size would it have chosen, and how much contrast would it have restored? Its zero-rescue result is conditional on the plug-in estimator, rather than evidence that fresh rollouts cannot recover contrast. Across all four methods and all five thresholds of the point-estimate rule, the controllers save *zero* prompts. Of GRPO's 640 prompt-step pairs, 461 have identical observed rewards — 427 all-correct and 34 all-wrong — with $\hat{p}$ at exactly 0 or 1, and the counts are near-identical for the other methods (AERO 461, GIFT 493, AREAL 452). Substituting $\hat{p} \in \{0, 1\}$ into h_G forces the estimated degeneration probability to one for every G. Resampling the same eight identical observed rewards to size G = 16 also cannot create an unobserved outcome: the resulting 0/1,867 rescue count is mechanical. Neither calculation identifies latent p as 0 or 1. These traces contain predominantly all-correct groups, but independent fresh responses at larger G from the historical panel are needed to estimate how often new outcomes restore contrast there. The separate frozen-checkpoint diagnostic in §7.4 observes new responses under a different, explicitly fixed contract; it does not reproduce this historical panel. The operating range where the trigger fires selectively is $\tau \in [0.70, 0.80]$, 12 to 19 fires per 40 steps at a cost ratio of 1.30 to 1.48, and the cost differences are retrospective budget accounting under that estimator.

In the same trace the escalation asymmetry is stark: 1,723 of 1,867 escalation events (92.3%) occur on all-correct groups and only 144 on all-wrong groups. A symmetric ZVF trigger mostly spends on prompts whose eight observed completions were all correct; that is not proof of certain success on future draws. The P7 report is explicit that deleting those fires is a counterfactual proposal only, because performance preservation has not been measured.

7.3.1 Archival detail: model-based refinements of the plug-in controller (not controller evidence)

The paragraphs in this subsection elaborate a plug-in model already known to be misspecified at the $\hat{p} \in \{0, 1\}$ boundary. They are retained for audit completeness as a negative design lesson; none of them evaluates the controller as a training policy.

Two refinements sharpen the picture and then complicate it. The Bayesian controller

replaces the point estimate with a Beta(1,1) posterior and a mid-range probability m(k, G) = Pr[0.05 ≤ p ≤ 0.95 | k, G], escalating an observed homogeneous prompt group when m exceeds a posterior threshold; already mixed groups retain the baseline group size. At τ_post = 0.60 it fires on the same 466.75 degenerate prompt-steps as the point-estimate rule at $\tau = 0.50$ — with a 95% bootstrap CI of [454.25, 485.00] — but at strictly lower cost, 8,854 rollouts against 10,240, a 14% saving; and all 466.75 of those mean fires are on observed all-equal groups, so the plug-in rescue calculation again reports zero; this is not a posterior-predictive zero-rescue guarantee. Above τ_post = 0.65 it never fires, because the maximum m over degenerate observations is 0.630.

The posterior-predictive eight-controller comparison produces a model-based metric reversal with bootstrap CIs attached. Its contrast-restoration estimates depend on the assumed posterior and are not observed outcomes from fresh rollouts; these intervals do not validate that assumption. On the cost axis the Pareto winner is Dualformer-Auto, an automatic difficulty-gated de-escalation rule, at a mean cost ratio of 0.657 [0.599, 0.738] against 1.000 for fixed G = 8 — a 34% rollout saving, assigned by the retrospective model to shrinking prompts classified as degenerate at G = 8. On a different axis, contrast restored per 1,000 extra rollouts, the ordering reverses: `zvf-triage` at $\tau = 0.50$ restores 90.10 units per 1,000 extra rollouts [89.40, 90.77], against 86.68 for $\tau = 0.70$, 84.00 for Dualformer-Auto and 80.00 for the Bayesian rule, and all four pairwise differences have CIs excluding zero. The Bayesian controller — Pareto-dominant on the earlier axis — is dominated here, because its principled prior fires on the hardest-to-restore degenerate prompts. The regime decomposition explains the mechanism rather than leaving it as a ranking: `zvf-triage` at $\tau = 0.50$ fires on 100% of steps in every regime on this panel, so it is operationally equivalent to "escalate every step," and its apparent advantage is mechanical exposure rather than a smarter rule. Its restoration decomposes 64.76% degenerate, 13.69% boundary and 21.56% mid-range; the non-degenerate 35.24% share is what the Bayesian rule sacrifices.

Two further analyses bound what this family of shrink-only rules can achieve. A per-prompt hindsight-optimal calculation scans G' down from a base of 8 and finds a bimodal optimum: G* = 8 for 72.9% of the 2,560 prompt-steps, which are observed all-equal groups assigned zero rescue by the plug-in model, and G* = 2 for the remaining 27.1%, which are already non-degenerate at G = 8 and are cheapest to shrink. Mean G* is 6.376, giving a cost ratio of 0.797 [0.776, 0.818] — a 20.3% saving that is pure economy, since mean contrast restored per prompt is 0.000 and mean contrast lost to shrinking is 0.130 ZVF units. This hindsight optimum is not a ceiling on cost (corrected; see Table E.1): Dualformer-Auto's observed 0.66 to 0.68 on the four-bin rule is *cheaper*. The two optimise different objectives. The hindsight calculation keeps every already-degenerate prompt at G* = 8 and only shrinks non-degenerate ones, whereas Dualformer-Auto also

shrinks prompts classified as degenerate in the observed G = 8 groups. The 0.797 is therefore the best cost ratio under a no-shrinking-of-saturated-prompts constraint, not a lower bound on cost for any adaptive rule. A finite-pool correction then shows that even this bound is loose: for uniform sampling without replacement from the observed binary pool, the hypergeometric probability of preserving mixedness is at least the corresponding with-replacement binomial probability, by +0.0494 [+0.0481, +0.0506] on the 693 relevant prompt-steps, which means the binomial model over-predicts starvation and the "zero contrast restored" accounting understates true preserved contrast by roughly 34.2 ZVF units.

7.3.2 Replication, design rules and status

Cross-base replication is where the retreat from "controller" to "audit" is earned. On a second panel of five independent seeds, the trigger fires 4.20 times per seed [3.00, 5.40] at $\tau = 0.70$, with the per-step rate falling from 0.48 to 0.28 as the panel's overall ZVF drops; this reproduces threshold-count behavior only. The N10 seed-robustness script substitutes a ZVF-derived proxy for unavailable PCD and uses a nonbinding guard, so it does not replicate the full original trigger. A separate N10 script reports zero Bayesian fires, but it reverses the earlier condition to $m < \tau$ and computes fractional pseudo-successes from aggregate step reward rather than per-prompt counts. Its high reported m values therefore cannot establish silence or scope limits for the original homogeneous-group, $m > \tau$ controller. That script also uses ZVF $< \tau$ for its triage branch, unlike the ZVF $\geq \tau$ seed-robustness analysis; these outputs must not be combined as one controller replication. And the aggregate firing rate is stable while the *location* is not: at $\tau = 0.70$ with a de-escalation threshold of 0.95, the cross-seed Jaccard overlap of the fire sets is 0.133, only 13.3% of steps see all five seeds choose the same group size, and the mean cross-seed Kendall-τ of per-step ZVF trajectories is -0.060. The firing rate is seed-stable; the firing location is not, so these traces do not support transferring a step-indexed firing schedule across seeds. The replayed unification confirms the direction: on this panel Dualformer-Auto is the only controller that saves compute (+14% [0.10, 0.18]) while `zvf-triage` spends more than baseline (-28% [-0.36, -0.20]), with disjoint CIs.

Five design rules close the P7 report, and they read as constraints discovered rather than principles asserted. Gate on PCD and alarm on ZVF: escalate only when ZVF is high *and* PCD indicates interior difficulty, because high ZVF with near-zero PCD and high reward is consistent with mastery — where $h_G(p) \approx 1 - G\varepsilon$ near the boundary and added rollouts buy order ε — while high ZVF with near-zero reward is consistent with incapacity; finite observations alone do not identify either endpoint, so the proposed choice between data intervention and resampling still needs prospective validation. Es-

calate multiplicatively in small steps, since at p = ½ each additional rollout halves the degenerate fraction; the audited 4 → 6 → 8 schedule at multipliers of 1.5 and 1.33 captured most of the achievable reduction at a total cost of +55% rollouts, whereas G = 16 costs four times the rollouts of G = 4 for a ZVF drop from 0.76 to 0.63 and no held-out gain on a near-saturated task. Consider spike-based rather than level-only triggers: the reported panel has lag-1 autocorrelation of approximately 0.94 and upward drift, which can make a level threshold fire persistently or rarely. That panel mixes measured and projected rows (§6.3.2), so this remains a design hypothesis rather than a general measured law. Never compare controllers across stacks; ship the seven manifest fields with item 5 carrying the escalation log. And treat ZVF = 0 as a purchase rather than a prize — the toy dynamic-sampling arm reached zero observed ZVF at a 45% rollout premium without exceeding the cheaper fixed recipe on held-out outcome. Neither the premium nor zero ZVF is guaranteed on other tasks.

The chapter's summary of P7 is the report's own. No result establishes prospective superiority over static G = 16, Dr. GRPO, or dynamic sampling; adaptive group size is explicitly *not* promoted to a recommended policy; and all intervention evidence is single-task, small-n, or retrospective. The report's contribution is a retrospective controller audit together with a pre-registered prospective test plan, and the bakeoff that would close the question — a matched-budget, multi-seed held-out comparison against the strong static baseline — is future work rather than a claim. In the same spirit, the report flags its own August 2026 evidence boundary: unsigned ZVF alone cannot select between retiring, distilling, retrying, resampling or warm-starting a prompt, so any operator policy remains a prospective evaluation contract rather than a demonstrated benefit.

7.4 Historical V2 Frozen-Policy Fresh-Rollout Diagnostic

Format-induced contrast is distinct from numeric contrast. A prospectively frozen diagnostic completed on 2 October 2026 found that 33 of 461 initially homogeneous eight-response groups became mixed after 24 additional responses: 7.16%, with a prompt-level Wilson 95% interval of 5.14-9.88%. Twenty of those first reward changes were parser failures whose visible final number still agreed with the gold answer. The remaining 13/461 (2.82%) were assistant-audited numeric-correctness contrasts: two wrong-to-correct recoveries and eleven correct-to-wrong changes. Thus the raw 7.16% measures variation in this diagnostic's binary reward, not a useful learning-signal rate or an accuracy gain.

The main cohort contained 512 GSM8K **train** prompts, each with 32 ordered responses from a frozen public Qwen/Qwen3-8B checkpoint in BF16 non-thinking mode. All 16,384 main responses completed. A disjoint 32-prompt smoke cohort was excluded from every main estimate. Each draw was a fresh response to the same original prompt, with a unique request seed, rather than a continuation of a previous answer. The primary endpoint was predeclared: among prompts whose first eight binary rewards all agreed, count those with both rewards in the combined 32. The strict parser used exact rational matching; parser failures received reward zero, while cap-hit outputs retained their exact-match reward and were separately flagged. Neither kind of output was removed from the primary denominator. Appendix B §B.12 gives the pinned revisions, decoder, receipt chain and audit method.

Table 7.1: Fresh reward mixedness under the frozen diagnostic contract. The all-correct numerator includes all 20 format-induced first changes; its other 11 cases are numeric failures. Intervals use prompts as the unit and a binomial working model, not a guarantee of population coverage under arbitrary dependence.

Initial eight-response group	Became mixed / eligible	Rate	Wilson 95% interval
All homogeneous (primary)	33 / 461	7.16%	5.14-9.88%
All-wrong (descriptive)	2 / 9	22.22%	6.32-54.74%
All-correct (descriptive)	31 / 452	6.86%	4.87-9.57%

The main corpus had 290/16,384 parser failures (1.77%) and 18/16,384 cap hits (0.11%), each below the predeclared 5% quality threshold. These global quality checks do not make a parser-induced reward change a numeric error. Separate assistant reviewers reviewed all 33 initial groups and first-changing responses in disjoint partitions, solving the arithmetic and applying the frozen rubric; this was model-assisted qualitative review, **not human annotation**. A coordinator separately checked both recoveries and one bread-rise wording ambiguity. That question's gold answer, 20 hours, assumes serial rises; it is ambiguous rather than definitely wrong and was already excluded from the numeric subset for a formatting failure. The two recoveries changed eight initial answers of 1152 to the supported value $6(150 + 6 \times 30 + 6 \times 12) = 2412$, and eight initial answers of 12 to the supported coin total $2 + 5 + 3.25 + 2 + 0.4 + 0.35 = 13$.

The predeclared clean-all-32 sensitivity was 12/439 (2.73%). Because eligibility requires all 32 outputs to be parseable and uncapped, it selects on post-initial outcomes and cannot replace the primary estimate. A **post-hoc exploratory** check found no later parseable, uncapped numeric change in any of the 20 parser-first groups; it leaves the frozen first-event audit unchanged and cannot predict further draws.

This parser effect is **diagnostic-contract-specific**. The repository's existing GSM8K test evaluator uses a more permissive extractor, including numeric conclusions embed-

ded in prose. These strict-parser events are therefore not evidence of reward failures in the historical evaluator or training runs. The 13 conservative numeric witnesses show that eight equal observed rewards need not imply a fixed numeric outcome on fresh draws for this checkpoint, task and decoder. They do not reconstruct a historical checkpoint, demonstrate training or controller benefit, identify a group-size optimum, or estimate held-out capability. The earlier failed V1 engineering smoke remains separate and unpooled.

7.5 C1 Results with Reference and Unit Boundaries

> **Framing (19 October 2026).** C1 is a parser/reference audit case study on a parser-zero-selected, first-64-of-87 cohort, not a recovery-rate estimate. Its reconciliation is assistant-assisted and has no independent human validation; blind human rating of at least the 11 event cases is owed by the author (AUTHOR_TODO) and has not been obtained.

Benchmark reference errors, ambiguous questions and equivalent units limit what this diagnostic can establish. Its frozen parser-defined result is **11/64 questions (17.19%; Wilson 95% interval 9.88-28.21%)**. Assistant-assisted reconciliation corroborates **three numeric recovery witnesses on the same 64-question denominator**. This 3/64 count (4.69%) describes the support found under a conservative review rule; it does not replace the frozen endpoint or estimate a population recovery rate. The other eight parser events include three convention-dependent interpretations, four materially ambiguous cases and one match to an incorrect reference answer. [S1-S4]

The study contains no training update. It does not measure useful reinforcement-learning gradients, reasoning improvement, controller superiority, held-out accuracy or general model capability. The prompts are public GSM8K training questions and are fresh only to this campaign. Historical V2 evidence remains separate and unpooled.

Table 7.2: C1 results and interpretation. The final three rows partition the eight events outside the conservative witness count. [S1-S4]

Quantity	Result	Interpretation
Eligible in the fixed screen	87 / 4,096	Eight parser-zero, valid and uncapped outputs
Selected for fresh draws	64 / 87	First 64 in frozen order

Quantity	Result	Interpretation
Frozen primary event	11 / 64	17.19%; Wilson 95% 9.88-28.21%
Conservative numeric witnesses	3 / 64	4.69%; support count, not a replacement endpoint
Convention-dependent event readings	3 cases	Retained review disagreement
Materially ambiguous events	4 cases	Requested quantity or premises unresolved
Wrong-reference event	1 case	Matching the reference reverses a correct initial answer

The three corroborated witnesses are Santana presents (C00, source rank 676), Suzanne bread (C07, rank 912), and Hank reading (C38, rank 2699). Santana's supported answer is $(4 + 7) - 3 = 8$ presents; Suzanne's is $3 \times 2 \times 52/12 = 26$ loaves; Hank's is $5(30 + 60) + 2 \times 2(30 + 60) = 810$ minutes. Each has eight reviewed, genuinely wrong initial final answers and at least one independently correct fresh final answer. [S3]

Santana also shows why final-answer correctness cannot validate reasoning. Its earliest successful fresh response, sample index 12, returns eight through an incorrect argument that no first-half birthday gifts were needed. Later successful indices 15 and 23 use the valid $11 - 3$ calculation. Hank's reference final value is supported even though its reference explanation mislabels subtotals. These distinctions remain visible in the event ledger. All sample and selected indices in this addendum are zero-based. [S3]

The checkpoint case (C35, rank 2593) gives the opposite result. Checkpoints at miles one and twenty-five enclose twenty-four miles across three gaps, so the separation is eight miles. All eight initial answers of eight are numerically correct. Four fresh outputs match the erroneous reference value six by dividing by four. The frozen analysis counts the event exactly as specified; semantic review does not call it mathematical recovery. [S3]

The citations, raft and fundraiser cases have favorable ordinary interpretations, but retain first-versus-second review disagreements. They are described individually rather than combined with the three corroborated witnesses into another adjusted recovery estimate. The remaining four cases concern aggregation of walking distance, the cake-and-ham probability event, the pet-owner denominator and Reggie's missing initial marble count. A gold match does not resolve those questions. [S3]

The original second-review categories are retained: sixteen clear wrong-reference judgments, nineteen materially ambiguous questions, two inconsistent questions, fifteen supported references and twelve references supported with conventional assumptions. Refinement separates four correct final answers with flawed reference explanations from the supported categories, leaving the following mutually exclusive view. [S2, S4]

Table 7.3: Refined labels preserve the original classifications and distinguish final-value errors from explanation defects. They are second-review judgments, not a consensus benchmark error count.

Refined second-review category	Questions
Clear wrong reference final value	16
Materially ambiguous	19
Inconsistent question	2
Correct final value with flawed reference explanation	4
Supported	12
Supported with conventional assumptions	11
Total	64

A narrower cross-review analysis corroborates fifteen wrong-final-value judgments under the stated or ordinary mathematical model. The towel case explicitly assumes equal towel weights. Separately, two discrete-count questions have inconsistent premises and erroneous reference relations, three correct-final references have corroborated text defects, and two materially ambiguous questions contain explicit reference faults. These are **22 disjoint cases with specified reference defects, not 22 wrong labels**. The four correct-final cases in the refined second review and the three corroborated correct-final defects are different sets: a notation defect newly identified for Sonia/Joss is not corroborated in both rounds. [S2, S4]

Thirteen first/second category disagreements are retained. The coin question illustrates the reason: gross deposits total 225 cents and the balance after withdrawal is 200 cents. The second review judges the recorded 200 wrong for the requested deposits, while the first retains a gross-versus-net target ambiguity. It is excluded from the narrower fifteen. Ordinary mathematical conventions are not defects merely because every physical assumption is unstated; genuinely different quantities or plausible readings are described case by case. None of these audit counts estimates whole-GSM8K error prevalence because the cohort was selected for eight parser-zero outputs and then truncated. [S2, S4]

Equivalent representations also matter. For Jackson ingredients (C36), all eight initial values 0.24 are equivalent to the reference 24 percent under the same conventional independent-selection probability interpretation; formal odds would be 6:19. The scalar parser extracted 0.24 faithfully. For Gunner plugs (C62), 200 pairs equal 400 individual plugs. Four initial responses preserve pair units, three remain unit-ambiguous and one incorrectly calls 200 the number of individual plugs. Neither case supports a claim of eight genuine mathematical errors. The frozen scalar references and rewards remain unchanged. [S5]

7.5.1 Separate Prospective Parser Validation

The undeployed parser v3 candidate was frozen at 02:43:30 UTC on 3 October 2026, before the earliest target batch at 02:59:39 UTC. The fixed target was the last 256 screening questions, eight responses each, yielding 2,048 future outputs. This was a predefined future subset of an ongoing study, not preregistration before the entire C1 campaign. Historical candidate tuning is separate. C1's primary score remains based on frozen parser v2. [S8, S9]

All 2,025 previously valid full parse objects were preserved. Four previously rejected outputs at four distinct prompts became accepted: one bold answer heading, two display-box blocks and one hash-prefixed XML answer block. Two separately blinded, output-only assistant annotations agreed on the same unambiguous scalar in all four changed cases. No changed acceptance was ambiguous or incorrectly extracted under those reviews. Nineteen outputs remained rejected. [S8, S9]

This supports only a narrow pass on the four observed extraction changes. It does not establish semantic precision for the 2,025 unchanged outputs, validate the nineteen rejects, measure task correctness, or estimate population false-positive rates. The responses are clustered within prompts. Four examples do not exhaust their wrapper classes or malformed-input behavior. The candidate remains undeployed and is not used to recompute C1 recovery. [S9]

All source labels refer to Appendix G.

Chapter 8


The E1–E14 Evaluation Campaign

Evidence tier (19 October 2026): every actor-dependent figure in this chapter is a stored-evidence result, not replayed, and an end-to-end harness score at first mention — not a capability measure. The actor's executed loss is unknown (dirty source missing; Chapter 1 terminology box), its adapter revision is withheld, and the exact 80 consumed training prompts are unknown.

This chapter reports the evaluation of a single Tinker-trained actor (stored-evidence, not replayed) against fourteen benchmark suites outside its recorded training-suite list, recorded lane by lane under sealed reservations, immutable receipts and explicit terminal states. Item-level decontamination is not established. Lanes that did not finish and lanes that could not start are reported too, because the methodological aim is to make the boundary between what was measured, what was only reported, and what can still be verified explicit. The current repository does not preserve every cited artifact, so it cannot support an unqualified claim that every figure has a surviving, hash-pinned evidence chain. Lane-by-lane detail that does not change any figure is collected in Appendix D (Figure 8.1).

Two reporting rules govern everything below, and they are worth stating before any number appears. First, original-contract results and replacement-scope results are never pooled and never averaged across suites; a replacement scope is a different suite, a different interface and often a different grader, and combining such figures would produce a number with no referent. Second, no figure in this chapter is quoted to a precision beyond what its source receipt records, and no comparison against a baseline, a sibling suite, or the untrained base model is asserted for the campaign lanes of Sections 8.2–8.6. Those lanes have no matched base-model arm. The one paired baseline comparison in this chapter is the small-scale trained-versus-base rerun of Section 8.7 (Table 8.B): 14 lanes, 5 to 151 identical items each, one vLLM engine for both arms. It finds no significant difference in any lane, and this chapter therefore claims no improvement of any kind

Lane terminal state, E1–E14 (ledger of 2026-09-19, updated with the runs of 2026-09-27)

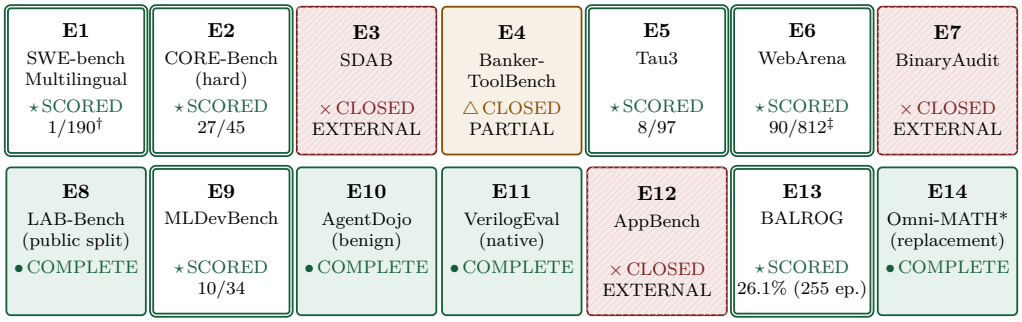

• **COMPLETE** (4) — full coverage, no open gate: E8, E10, E11; E14* terminal-complete

⋆ **SCORED** (6) — double border: replacement scope scored on 2026-09-27: E1, E2, E5, E6, E9, E13

△ **PARTIAL** (1) — closed with partial evidence: E4 (1/100 tasks)
× **BLOCKED** (3) — hatched: whole lane externally closed, external payload unavailable: E3, E7, E12 (original contracts of E8, E10, E13, E14 are also blocked; those lanes report replacement scopes)

Source: `finish/Pending_Experiments.md` terminal-state table; `E1_E14_FINAL_RESULTS_2026-09-19.md`; `finish_pending_2026-09-27/<lane>/result.json`.

† This run's 190 tasks; the earlier 110 (4 resolved) are a separate contract and are not pooled.

‡ Lower bound: 108 tasks could not be judged and count as failures.

Figure 8.1: Terminal status of all fourteen E1–E14 lanes: the 2026-09-19 ledger of record, updated with the six replacement scopes scored on 2026-09-27 (double border, ⋆). Each cell names the suite whose scope the state refers to, and status is carried by glyph, word, border style and hatching as well as colour. Cells show the replacement scope where one exists (E1 SWE-bench Multilingual, E2 CORE-Bench, E5 Tau3, E6 WebArena, E8 LAB-Bench public, E9 MLDevBench, E10 AgentDojo benign, E13 BALROG, E14 Omni-MATH) and the original contract otherwise; the original-contract suites and their results (e.g. E1 SWE-bench Pro 2/731, E2 FrontierSWE, E5 APEX-Agents, E9 MLE-bench) are shown in the campaign-design figure (Chapter 4) and are never pooled with replacement-scope numbers. *E14 closes terminal-complete: native accepted-set harness score 2271/4426 = 51.31% (canonical); all-disposition diagnostic 2271/4428 = 51.29% with the two unjudged rows counted as failures.All actor-dependent figures are stored-evidence end-to-end harness scores, not replayed and not capability measures (Chapter 8 gives failure-mode rates).

over the base model. Where a lane's record itself contains an unresolved discrepancy, the discrepancy is stated.

The consolidated ledger of record for the campaign is `outputs/E1_E14_FINAL_RESULTS_2026-09-19.md`, which supersedes the working tables of 2026-09-05 and 2026-09-12; the per-lane terminal-state ledger, `withheld historical campaign chronology`, was recovered from the original Mac checkout on 3 October 2026 with updates through 21 September, while remaining absent from the frozen repository; and selected arithmetic of the ledger was historically re-verified by deterministic code checks recorded in `outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json`, which reports eleven of eleven named checks passing with zero failures (Appendix B lists their scope; they do not cover every figure in this chapter).

Evidence availability (private recovery audit, 3 October 2026). Six original files covering all five previously missing basenames were recovered from the Mac checkout: the E10 native receipt, E8 diagnostics, training-identity verification, E14 terminal note and two distinct `Pending_Experiments.md` snapshots. All remain absent from the frozen repository, but their exact UTF-8 bytes and SHA-256 hashes are preserved in the withheld source archive described in Appendix B §B.11. A separately retained source audit records bounded read-only checks of underlying E8/E10/E14 artifacts on the Mac: 29 exact reference-path hash matches, 1,979 E8 archive/local member checks, 525 E10 archive-member checks and E14 stored-disposition inspection. Exported E8 grade records and E10 selected trace records permitted independent tally checks in the retained private evidence audit; those underlying rows are not included in this public document package; E14 exports aggregate traversal results and two exclusion records, not all underlying rows. This verifies stored evidence and arithmetic within that scope, without rerunning models or scorers, rejudging correctness, or reconstructing the dirty execution source and exact consumed training rows. A later local check found the three original training-log files and matched their identity-receipt hashes (§B.11); those files remain withheld from this package. It supersedes the earlier missing-primary disclosure for these files only; the frozen-checkout absence record remains valid. E14's recovered note contains a denominator inconsistency, and the recovered finish ledger does not substantiate the later E4 rerun; both are disclosed below.

8.1 The evaluated actor and the one-actor design

A single actor was evaluated across the whole campaign. The base model is `Qwen/Qwen3.6-35B-A3B` at revision `995ad96eacd98c81ed38be0c5b274b04031597b0`, and the trained parameter set is the LoRA adapter `campaign-adapter`

at commit withheld-adapter-revision, served in bfloat16 under the identifier campaign-actor-bf16. The public package does not contain the original execution route or operational repository access identities. It therefore cannot reproduce the original sampler execution from these materials alone; no current provider-retention or account-status claim is made here.

The one-actor design is deliberate. No lane received a separate checkpoint, per-suite prompt engineering beyond its native harness, or tuning against its own evaluation set: the recovered training-identity record lists only API-Bank-RLVR and SWE-Gym (§8.1.1), while the recovered E10 receipt explicitly reports TRAINING_INVENTORY_ABSENT and makes no held-out claim. The E10 contract's declaration of AgentDojo training is explicitly marked as not evidence of training consumption; neither record proves content-level decontamination. Differences between suites therefore reflect the interaction of one fixed policy with fourteen different interfaces, observation spaces, tool conventions and graders, and they are not evidence about what a specialised actor could achieve. The campaign also cannot support any statement about seed variance. Inference conditions were frozen per lane and recorded in that lane's own receipt (§8.1.2).

8.1.1 How the actor was trained

The adapter is attributed to a single Tinker training run (W&B run withheld-id). The recovered training_identity_verified.json records that run ID, aggregate dataset revision, start time, base Git commit and hashes of config.yaml, wandb-metadata.json and output.log. Its status is TRAINING_CONFIG_VERIFIED_NOT_CONTENT_DECONTAMINATION, and it states that the dirty source diff was not uploaded. The underlying W&B files and local run receipt have not been recovered in this package, so their bytes cannot yet be matched afresh to those recorded hashes. Appendix D separates these surviving identity fields from the still-reported configuration details in Table 8.1.

Reported training record of the E1–E14 actor. The identity-verification artifact is recovered; underlying local run files remain unavailable in this package. Current-code evidence is labelled separately.

Table 8.1: Reported training record of the E1–E14 actor, with the source-availability limitations above.

Field	Value	Evidence
Launch	`python -m platform_tinker.tinkerrl.grpo_cli --preset pavlov_portfolio`, no overrides	`wandb-metadata.json`
Base model	`Qwen/Qwen3.6-35B-A3B` at revision `995ad96e…`	`config.yaml`; run receipt
Loss	Historical account reports a group-centred policy-gradient loss, but the exact executed objective, token mask and auxiliary terms remain unverified because the dirty training source is missing. Current code has population reward scaling, an explicit response-only loss path and optional auxiliary NLL; its current behavior cannot establish the historical actor's loss.	Historical account; current `platform_tinker/tinkerrl/grpo.py` is implementation context only (Table 4.2)
Sampler refresh	Historical account reports checkpoint-only refresh: steps 1–20 from step-0 weights and steps 21–40 from step-20 weights, without importance correction. This schedule is not freshly established from the missing execution source.	Historical account; current `grpo.py` cannot prove execution

Field	Value	Evidence
Reward	`PavlovNonXLAMReward`: API-Bank rows scored by `StrictToolCallReward`, SWE-Gym rows by `PatchReward` (1.0 for an exact diff, otherwise partial credit capped at 0.99)	`platform_tinker/tinkerrl/grpo_cli.py`, `grpo.py` (current code; see Appendix D)
Training data	Suites `api_bank_rlvr_train` and `swe_gym_train` (API-Bank-RLVR at `bf67c426`…, SWE-Gym at `bb94ed9e`…); dataset revision `bd1f0db6`…; training pool of 512 rows	Recovered training-identity record binds the suite IDs and aggregate revision; run receipt, `config.yaml` and E11 decontamination receipt are the reported sources for remaining fields
Declared evaluation suites	14 primary evaluation suites (the original E1–E14 contracts, including `verilog_eval`); `heldout_suite_ids` empty; `evaluate_heldout` false	run receipt
Group size, batch, steps	G = 4; 2 prompts per step; 40 steps; 80 prompt draws and 320 completions in total	`config.yaml`; run receipt
Optimiser	lr 1×10^{-5}; Adam β_1 0.9, β_2 0.95, ε 10^{-8}	`config.yaml`
LoRA	rank 32, alpha 32, all linear layers	`config.yaml`; adapter config
Decoding during training	prompt 1,536 and response 384 tokens; temperature 0.7, top-p 0.95; seed 809	`config.yaml`

Field	Value	Evidence
Reward trace	mean 0.025 over the first 5 steps and 0.2425 over the last 10; reward zero on 22 of 40 steps; loss zero on 35 of 40 steps	run receipt; `output.log`
Training time	started 2026-08-09; runtime 1,934 s	historical training metadata; underlying files remain unavailable
Checkpoints	Scientific schedule reported at step 0, step 20, step 40 and final; the final adapter follows step 40 without an additional optimizer step	Historical scientific training record; execution-specific repository paths omitted
Execution provenance	Exact private execution identities and access paths are withheld; the public package cannot replay the original execution route	Public-source limitation, Appendix I

Four items remain unavailable or were never created — the exact training code, which 80 training prompts were drawn, the Tinker sampler weights, and any held-out training-time evaluation — and the run departs from the planned Pavlov protocol; both are recorded in Appendix D so that no reader fills them in.

What this means for the chapter is direct. The actor received 40 steps of sparse-reward, critic-free policy-gradient training, with zero loss on 35 of them. The fourteen suite results are properties of this checkpoint, not evidence about what GRPO-style training contributes. The campaign is reported as an exercise in evaluation governance. The only trained-versus-base evidence is the small-sample paired comparison of Table 8.B.

8.1.2 Serving conditions per lane

The E4 zero (§8.5) prompted identification of a serving bridge that sent no stop sequences. The defect can cause failed agent trajectories, but its contribution to the full 100-trial zero is not identified by the available comparison. The same bridge, `zvf-program/flagship/modal_tinker_openai_bridge.py`, served several other lanes, so Table 8.2 records for every lane how the actor was served and whether that defect

could apply. Its `/v1/responses` route hard-codes `stop=None` and thinking on. Its `/v1/chat/completions` route sends stop sequences only if the client supplies them, and the agent clients used here (opencode, mini-swe-agent and the APEX client) do not. The deployed bridge version (sha256 `f59c08b9…`) matches neither committed version of the file.

Serving conditions of the original campaign runs, by lane.

Table 8.2: Serving conditions of the original campaign runs, by lane.

Lane	Serving path	Stop sequences	Template / thinking	Max tokens	Temp.	Parse failure / truncation	Could the stop defect apply?
E1 SWE-bench Pro	Mixed: 476 Tinker sampler, 255 Modal vLLM (merged PEFT)	none; relies on EOS	chat template, thinking off	8,192	0.2	14 generation failures, 4 artefacts lost; 40/476 Tinker and 22/255 vLLM responses at the cap; 593 of 713 submitted patches fail `git apply` as corrupt patches (hunk-header line counts), so tests ran on the unpatched base	Not through the bridge. The Tinker path also sent no stops, but no response contains role-token lines and cap rates match across backends
E2 FrontierSWE	bridge (Harbor/opencode)	not recorded; client sets none	not recorded	not recorded	not recorded	not recorded	Yes
E3 SDAB	no model output	—	—	—	—	—	n/a
E4 Banker-ToolBench	bridge (opencode); base rerun via `/v1/responses`	none	template default (thinking on)	not recorded	bridge default 0.2	pass3 archive missing	Yes; defect documented, aggregate causal effect unmeasured
E5 APEX-Agents	bridge (actor and judge)	not recorded	not recorded	not recorded	not recorded	3 unscored failures, 1 interrupted	Yes
E6 WebArena	no model output	—	—	—	—	—	n/a
E7 BinaryAudit	bridge (mini-swe-agent)	not recorded	not recorded	16,384 (output limit)	not recorded	attempt ended on an HTTP 402 bridge-budget error	Yes, but the attempt ended on a budget error

Lane	Serving path	Stop sequences	Template / thinking	Max tokens	Temp.	Parse failure / truncation	Could the stop defect apply?
E8 LAB-Bench	Modal vLLM, merged BF16	none; vLLM EOS	thinking off	1,024	0	1,259/1,967 unparsed (64.0%); 1,086/1,967 length-truncated (55.2%)	No
E9 MLE-bench	streaming arm via bridge `/chat/completions`; merged arm via vLLM	none in either arm	thinking off	4,096	0.2	not recorded	Yes for the streaming arm (single-turn); no for the merged arm
E10 AgentDojo	Modal vLLM, merged BF16	none; vLLM EOS	thinking on	4,096	0	1 length finish in 418 recorded response bodies (407 main run, 11 continuation)	No
E11 VerilogEval	Tinker sampler, called directly	none	template default (thinking on)	1,024	0.2	150/312 extraction failures (48.1%); the 1,024-token cap with thinking on is a plausible contributor; finish reasons not recorded (mean response ≈ 1,002 of 1,024 tokens)	Not through the bridge; unknown, because per-item outputs are not kept locally
E12 AppBench	no model output	—	—	—	—	—	n/a
E13 BALROG	Modal vLLM, merged BF16	none; vLLM EOS	thinking on	8,192	1.0	73 length finishes against 189 stop finishes in 262 recorded responses	No
E14 Omni-MATH	Modal vLLM, merged BF16	none; vLLM EOS	thinking off	2,048	0	2,982/4,428 responses at the 2,048-token cap (67.3%), 34.5% correct against 85.9% uncapped; 2 unjudged	No

Sources: per-lane receipts under `outputs/modal_e1_e14/2026-08-16/`, `outputs`

/public_portfolio_2026-09-05/, outputs/e2_frontier_swe/, outputs/e5_apex_agents/, outputs/e7_binaryaudit/, outputs/e9_mle_bench/, and outputs/PES_Phase2_Review_2026-09-12/finish/e13_control/; bridge bindings in outputs/modal_e1_e14/2026-08-16/non_e11_readiness/.

The recovered E8 diagnostic now supports its aggregate failure counts, and the recovered E10 receipt supports its declared inference limits. Other entries still depend on unrecovered raw responses or finish-era sources, so recovery of these two receipts does not verify every serving and failure count in the table. Two consequences follow. First, the lanes served through the bridge (E2, E4, E5, E7 and the E9 streaming arm) may be exposed to the E4 mechanism, but exposure does not demonstrate that it caused their failures or quantify its contribution to E4. Second, the reported format and length failures mean that E8, E11 and E14 headline figures are end-to-end harness scores; §8.2 distinguishes their sensitivity figures and missing evidence. E11 has substantial extraction failures under a tight generation cap, E14 has a large capped/uncapped accuracy difference, and E1 has widespread patch-application failures. These are end-to-end protocol outcomes; the evidence does not isolate the causal contribution of budget in E11 or E14 (§8.2, §8.3). A note on the scope of the stop-sequence mechanism is in Appendix D.

8.2 Suites with strictly complete scopes

The historical ledger and its check log report three strictly complete scopes: E8, E10 and E11. E8 and E10 are replacement scopes. E11 is an original-contract full-suite result that also meets the strict-completeness check, because the suite evaluated is VerilogEval itself; the ledger lists it both among its replacement scopes and among its original-contract results, but it is one run and one result. A fourth, E14, is recorded terminal-complete under its native protocol in the recovered terminal note, subject to its denominator inconsistency and the raw-output limits below. The six replacement scopes completed on 27 September postdate that check and are reported separately in §8.4 (Figures 8.2 and 8.3).

E8 — LAB-Bench, public split. The recovered `outputs/public_portfolio_2026-09-05/labbench_final_diagnostics.json` records all 1,967 expected items evaluated across eight categories, with 450 correct and 1,517 incorrect responses. Those counts give an end-to-end harness score of 450/1967 = 0.2288 (Wilson 95% CI [0.211, 0.248], unit = question, n = 1,967; stored-evidence, not replayed), with 1,259 of 1,967 responses unparsed and 1,086 length-truncated. It records the 1,259 unparsed responses (`native_answer_parse_none`) and 1,086 length-truncated finishes. The supplemen-

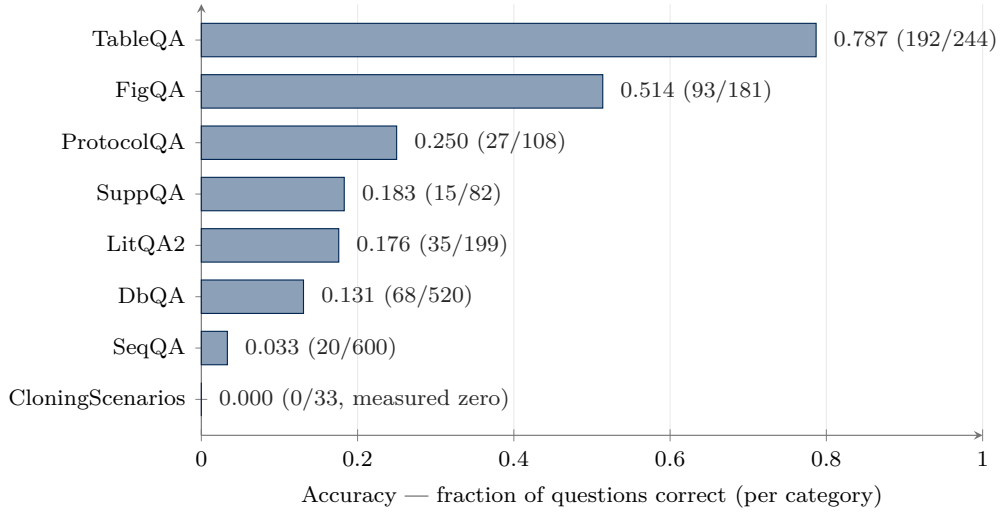


Figure 8.2: LAB-Bench public split, per-category accuracy, all 1,967 questions graded across eight categories. Each bar is correct/total for one category (labels give the counts). Accuracy is strongly category-dependent. No pooled bar is drawn here; the chapter separately reports the item-weighted 450/1967 benchmark fraction. CloningScenarios is a historically reported zero (0/33). The original diagnostic file was recovered and byte-verified on 3 October (Appendix B); its aggregate counts agree with these bars. These are end-to-end harness scores (stored-evidence, not replayed): 1,259 of 1,967 responses were unparsed and 1,086 length-truncated.

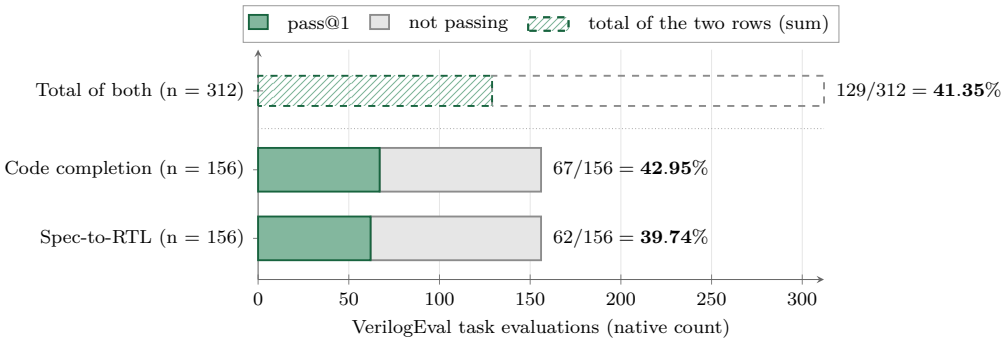


Figure 8.3: VerilogEval decomposition: two native framings of 156 tasks, 67/156 code-completion and 62/156 spec-to-RTL, summing to 129/312 = 41.35% pass@1. The dashed top bar is the sum of the two rows, not a third measurement. Graded by the suite's native harness (receipt `e11_full_receipt.json`); the 129/311 = 41.48% value that excludes `Prob099_m2014_q6c` is a non-canonical sensitivity only. This is an end-to-end harness score (stored-evidence, not replayed): 150 of its 183 failures are extraction failures under a 1,024-token thinking-on cap.

tary validation found the native receipt at its recorded hash and checked 1,979 archive members against both declared and local hashes. Its 1,967 unique exported grade records independently corroborate the correct/incorrect totals, category counts and 1,086 length finishes. The 1,259 parse-none count remains a field of the byte-preserved diagnostic: the exported grade records contain no parsed-answer field for a separate recount. The reported score is an end-to-end harness score with substantial formatting and length limitations. The conditional descriptive sensitivity remains 450/708 = 0.636 (Wilson 95% CI [0.600, 0.670]), not the headline or a direct measure of domain knowledge; its response-level classification has not been independently regraded. Per-category figures and evidence limits are in Appendix D.

E10 — AgentDojo, benign utility scope. The recovered `outputs/public_portfolio_2026-09-05/agentdojo_native_receipt.json` records status `COMPLETE_NATIVE_BENIGN_UTILITY`, 97 completed episodes, 88 utility passes, AgentDojo v1.2.2 and decontamination status `TRAINING_INVENTORY_ABSENT`. Its benign-utility harness score is 88/97 = 0.9072 (Wilson 95% CI [0.833, 0.950], unit = episode, n = 97; stored-evidence, not replayed; benign utility only, no adversarial-robustness or held-out claim). The receipt binds the benchmark version but contains no upstream commit field; the previously attributed commit `089ed468cf3ed0322acc66b0211f26d9d90dbf60` is therefore not verified by this receipt. Its scope is native default benign utility only: `security_evaluation` and `heldout_claim` are false, while `attack` and `defense` are null. Completion and utility are distinct: 97 completed episodes do not mean 97 correct episodes. The supplementary validation checks 525 archived member pins and maps all 97 selected episodes to unique exact-hash traces (94 original and 3 explicit continuation), whose stored utility fields independently tally to 88 passes and zero handled errors. It excludes extra historical partial traces from that mapping. This is stored-trace corroboration, not a rerun of AgentDojo or an independent judgement of task correctness. The earlier 94-episode attempt and reported collector repair retain their separate missing-source limitations in Appendix D.

E11 — VerilogEval, two native framings. All 312 pinned prompt instances were evaluated under the upstream NVlabs/verilog-eval harness, but they represent 156 underlying designs, each appearing in code-completion (`code-complete-iccad2023`) and specification-to-RTL framing. The descriptive end-to-end harness score (stored-evidence, not replayed; 150 of its 183 failures are extraction failures, below) remains 129 passes of 312 = 0.4135, decomposed into 67/156 = 0.4295 for code-completion and 62/156 = 0.3974 for specification-to-RTL. Because paired framings share a design, a Wilson interval treating all 312 outcomes as independent is inappropriate. Resampling the 156 design pairs together gives a 95% percentile cluster-bootstrap interval of [0.343, 0.487] (200,000 replicates, seed 20261002). This describes design-composition uncer-

tainty under an exchangeable-design assumption for this checkpoint and these fixed sampled generations; it is not training-seed, decoding-seed or protocol uncertainty. The observed full pinned-benchmark fraction itself remains descriptive. The surviving receipt records 150 extraction failures included in the denominator, so 129/312 is an end-to-end harness score: 150 of its 183 failures are extraction failures. A generation-budget mechanism is plausible but not identified (corrected; see Table E.1). The run used a 1,024-token cap with the chat template's default thinking mode on, and the receipt's 312,622 response tokens give a mean of about 1,002 per sample. That mean shows near-cap lengths; without per-response text or finish reasons it cannot establish how many outputs reached the cap or where their reasoning blocks ended. On the 50 items of the 26 September small-scale rerun (§8.7), the receipt's verdicts give 23/50, while the same trained adapter with thinking off and a 4,096-token cap scores 33/50 with no extraction failures (11 items pass only in the second run and 1 only in the first; exact McNemar $p \approx 0.006$). That comparison also changes engine and temperature (managed sampler at 0.2 against vLLM at 0) and covers 50 of 312 prompts, so it shows an improvement under the combined protocol changes, not an isolated budget effect or a corrected score. The extractor also accepted a module found inside an unterminated reasoning block, and per-sample response text was not kept, so some of the 162 extracted candidates, and possibly some passes, may be drafts from the reasoning rather than final answers. The parseable-only descriptive sensitivity is 129/162 = 0.796, hard to interpret for that reason; no interval is given because the receipt's aggregate extraction count does not provide the per-design extraction indicators needed for a clustered conditional interval. One prompt, `verilog_eval/spec-to-rtl/Prob099_m2014_q6c`, fails against its own test bench under both simulators; excluding it yields 129/311 = 0.4148, but no immutable justification for the exclusion was captured, so the raw 129/312 is canonical and 129/311 is a noncanonical sensitivity only. Pair counts, the bootstrap method, harness revisions, verdict rule and amendment are in Appendix D.

E14 — Omni-MATH replacement scope, receipt-recorded terminal-complete. The surviving ledger and historical arithmetic check record 4,426 accepted rows of 4,428 and official accuracy 0.5131043831902395, consistent with 2,271/4,426 — an end-to-end harness score under a 2,048-token cap that 2,982 of 4,428 responses reached (stored-evidence, not replayed). Retaining 2,271 passes but counting both unjudged rows as failures gives 2,271/4,428 = 51.29 per cent (Wilson 95% CI [0.498, 0.528]), 0.02 percentage points below the judged-row rate. The recovered `outputs/PES_Phase2_Review_2026-09-12/finish/e14_terminal_note_2026-09-19.json` records truncated judge outputs before an Equivalence Judgement section, two recorded skip reasons, no re-judge and terminal completion at 4,428 dispositions. **Erratum (E14 denominator, restated 19 October 2026):** the note nevertheless labels `2271/4428` as

`0.5131043831902395`, a denominator inconsistency: that decimal equals 2,271/4,426, not 2,271/4,428 (2,271/4,428 = 51.29%). The native accepted-set denominator, canonical in this thesis, is 4,426; the all-disposition diagnostic denominator is 4,428. The original note is preserved unchanged; only its reading is corrected, and this thesis retains both clearly labelled arithmetic conventions (see Table E.1 and Appendix E §E.4). The supplementary Mac-side traversal found the stored disposition, judged-row and new-judge-response files with 4,428 valid JSON rows apiece. It reports 4,426 accepted dispositions, 2,271 correct and two skipped, and exports both exclusion records with missing Equivalence Judgement headings. It also records the native score's explicit 4,426 denominator and the separate all-disposition diagnostic. The full E14 rows are not exported here, so the cloud check verifies the exported arithmetic and exclusions rather than independently recounting all 4,428 rows or rejudging any mathematics. The 2,048-token actor cap is an important protocol limitation, with a strong observational association between cap hits and errors (corrected reading; see Table E.1). Recounting the stored dispositions, the 2,982 responses that hit the cap are correct in 1,029 cases (34.5%), against 1,242 of the 1,446 uncapped responses (85.9%). The split is confounded by difficulty, since harder problems both run longer and fail more, so it does not identify what a larger budget would score; neither the 51.31% accepted-set score nor the 51.29% all-disposition diagnostic should be read as the actor's Omni-MATH capability independent of its generation budget.

8.3 Original-contract results

Seven lanes have an original-contract figure, reported separately from any replacement scope with its coverage caveats; two are full-suite results. Lane detail is in Appendix D.

- **E1 — SWE-bench Pro.** 2 of 731 tasks resolved, an end-to-end harness pass@1 of 2/731 = 0.00274 (stored-evidence, not replayed; 593 of the 713 submitted patches were corrupt for `git apply`, below), or 0.274 per cent (Wilson 95% CI [0.08%, 0.99%], unit = task), over the complete 731-row test split of `ScaleAI/SWE-bench_Pro`. The fourteen generation failures and four lost artifacts stay in the denominator. The 713 "native evaluations" are not 713 tests of a candidate fix (corrected reading; see Table E.1). Parsed with `git apply`, 593 of the 713 submitted patches are rejected as corrupt, because their `@@` hunk headers state line counts that do not match the hunk bodies; the official entry script runs a plain `git apply` and then the tests, so for those 593 the tests ran against the unpatched repository. With `git apply --recount`, 711 of 713 parse. Both resolved instances are among the 120 patches that parse. The 2/731 is therefore

an end-to-end issue-resolution score with a major patch-format limitation. It does not isolate semantic problem-solving ability, and the stored run does not establish whether the rejected patches would solve their issues after header repair.

- **E2 — FrontierSWE.** 1 of 17 tasks evaluated, replay-normalised score 0.8628; partial, because revision-bound authorisation for the remaining sixteen was never obtained.
- **E4 — BankerToolBench.** 1 of 100 tasks evaluated, recovery metric 0.3115 — a verifier recovery metric on a single task, not the simple fraction 37/128 and not a suite score; the pass3/pass16 archive is missing.
- **E5 — APEX-Agents.** 7 of 480 tasks natively scored. The prefix mean of 0.050505 treats unscored attempts as zero and is not a native 480-task score; the seven scored tasks average 0.079365.
- **E7 — BinaryAudit.** One of 46 attempts recorded, verifier reward 0.0 after an agent error, no grade.
- **E9 — MLE-bench.** 40 of 75 competitions carry native grades, a coverage of 53.33 per cent, and the suite score is null; a separate merged-vLLM arm holds one valid grade (H&M, 0.02132) and is not combined.
- **E11 — VerilogEval** is reported in §8.2; it is the second original-contract full-suite result, alongside E1, and not an additional one.

No lane here has a matched base-model run, so none licenses a claim that the actor outperforms its untrained counterpart, a predecessor model, or a published number.

8.4 Replacement-scope lanes completed on 27 September 2026

At the 19 September ledger of record, six replacement scopes were started but incomplete: E1 (SWE-bench Multilingual, 35 of 300 graded), E2 (CORE-Bench, 45 capsule setups, no grades), E5 (Tau3, 20 of 97 cleaned) and E13 (BALROG, 13 of 255 episodes) were launch-pending, and E6 (WebArena, 0 of 812) and E9 (MLDevBench, 0 of 34) were `PENDING_QUOTA` because required execution capacity was unavailable. All six were run to completion on 27 September (Figure 8.4).

The later launch used a lead-issued protocol override rather than independent approval. That governance limitation matters: the candidate was both the experiment lead and the author of the override. The public derivative omits operational authorization records and account limits; the scientific departures from the native protocols remain explicit in Table 8.D.

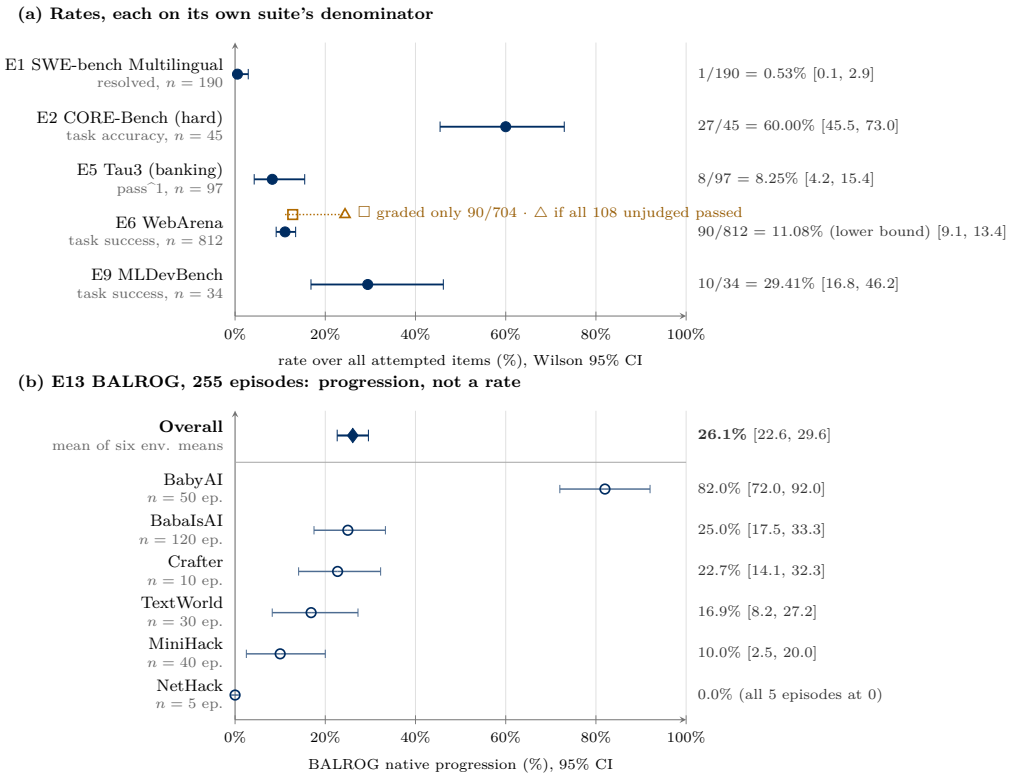


Figure 8.4: The six replacement-scope results scored on 2026-09-27, each with its 95% confidence interval. (a) Rates over all attempted items, with errors, timeouts and ungraded items counted as failures (Wilson intervals). For E6 WebArena the filled point is the lower bound 90/812; the square is the rate over the 704 judged tasks and the triangle the value if all 108 unjudged tasks had passed. (b) E13 BALROG reports native progression, not a success rate: per-environment means with percentile-bootstrap intervals (B = 10,000), and the BALROG overall score, the unweighted mean of the six environment means, with its normal-approximation interval. Each row is a different suite with its own metric and denominator, so no cross-lane average is drawn, and none of these values is pooled with an original-contract figure. Source: `outputs/finish_pending_2026-09-27/<lane>/result.json`.

Table 8.C. Replacement-scope results, 27 September 2026. One run per item, native grader. Errors, timeouts and ungraded items count as failures in the denominator. Graded counts items with a native verdict. Intervals are Wilson 95% for rates; E13's uses BALROG's standard error, and its score is the mean of six per-environment means.

Lane	Benchmark (scope)	Attempted	Graded	Metric	Result	95% CI
E1	SWE-bench Multilingual (190-task completion wave; §D.6)	190	57	resolved rate	1/190 = 0.005	[0.001, 0.029]
E2	CORE-Bench hard (all 45 capsules)	45	45	task accuracy	27/45 = 0.600	[0.455, 0.730]
E5	Tau3 banking (all 97 tasks)	97	72	pass^1	8/97 = 0.082	[0.042, 0.154]
E6	WebArena (all 812 tasks)	812	704	success rate, lower bound	90/812 = 0.111	[0.091, 0.134]
E9	ML-Dev-Bench (all 34 tasks)	34	34	success rate	10/34 = 0.294	[0.168, 0.462]
E13	BALROG (all 255 episodes, 6 environments)	255	255	progression	26.1%	[22.6, 29.6]

Sources: `outputs/finish_pending_2026-09-27/<lane>/result.json` for each lane.

Table 8.D. Deviations from the fail-closed protocol, 27 September 2026. Condensed from the `deviations` field of each lane's result file; the full text is in that file.

Lane	Deviation from reference protocol/scaffold	Recorded in
E1	Actor at 32,768-token context (65,536 on 12 Sept), per-task `max_tokens` cap; source-context collector re-implemented; thin runner `run_remaining.py` bypassing paperwork gates, native eval in Modal sandboxes; batches r06/r07 harvested from orphaned sandboxes (exec stdout/returncode lost); two driver relaunches reusing, never resampling, completed generations; context-overflow short-circuit	`E1/result.json`
E2	Per-task GCP VMs instead of native Azure shapes; thin `bash/query_image/finish` loop instead of the CORE-Agent scaffold (native 8,100 s budget, 150-turn cap, 26k-token window); `query_image` answered by the same actor; infrastructure aborts rerun from scratch, none because of score	`E2/result.json`
E5	Thin runner `code/run_tau3.sh` replaces the fail-closed `e5_successor27` controller; dedicated 65k-context actor copy; OpenAI roles through a spend-capped relay	`E5/result.json`

Lane	Deviation from reference protocol/scaffold	Recorded in
E6	GCP VM instead of the AWS AMI; thin runner `code/e6_driver.py` mirroring native `run.py`; `max_tokens` 384, few-shot system turns mapped to user/assistant; retired native judge swapped to `openai/gpt-4.1`, which was unavailable (108 tasks ungraded, counted as failures); 1,500 s per-task timeout; last 103 shopping-admin tasks sharded over three containers of the official image	`E6/result.json`
E9	GCP instead of AWS; backported one-line OpenHands context-window fix; loopback relay forcing non-thinking and restoring dropped tool-call text; `max_input_tokens` 28,000; one run per task	`E9/result.json`
E13	Non-thinking template (original run had thinking on); NetHack capped at 2,000 steps (never bound); macOS arm64 instead of the Linux x86 image, dynamics not bit-verified; killed or hung episodes rerun from scratch with new seeds	`E13/result.json`

Sources: `outputs/finish_pending_2026-09-27/<lane>/result.json`, field `deviations`.

The six figures are on six different benchmarks with six different metrics, and they are not averaged, pooled with the same lane's original-contract result, or compared with a base model. Five lanes (E2, E5, E6, E9, E13) now have a native score over their full replacement scope. E6's is a lower bound: 108 tasks needing an LLM judge could not be graded, and the true figure lies between 0.111 and 0.244. E1 has two separately reported scores, 1/190 and 4/110 (the earlier waves, served at a different context), that together cover all 300 tasks but are not combined. E5's pass^1 over the 72 tasks without an infrastructure error, 8/72 = 0.111, is a sensitivity figure only, and E13's 26.1 per cent is not compared with the 26-episode small-scale E13 rows of Tables 8.A and 8.B. Per-lane narratives are in Appendix D.

8.5 The E4 rerun as a diagnostic

A fresh full BankerToolBench rerun was reported to have run the base model with a zero-initialised LoRA snapshot through the Modal bridge `/v1/responses` path after the lane closed `CLOSED_PARTIAL` on 19 September. The surviving `outputs/e1_e14_small_scale_2026-09-26/E4/result.json` (`prior_base_run`) repeats 100 trials, one error and a mean reward of 0.0. The recovered terminal ledger, `withheld`

historical campaign chronology, includes updates through 21 September and explicitly says the rerun was NOT launched at that snapshot. It therefore cannot support the later completed-run account. The raw job receipt, outputs/e4_banker_toolbench/official_repo_ff6db552/jobs/btb-banking-tasks-tinker-bridge/result.json, remains unrecovered in this package. The 100-trial result is supported here by the surviving prior_base_run secondary record; the earlier detailed claims of 2–14 agent steps, no deliverables and at least 27 role-token-degenerate trajectories are not freshly verified. The surviving bridge finding documents a route that passes no stop sequences and can run past end-of-turn tokens into invented turns. Under a corrected shim, the same base model scored 0.4087 on task btb-19b3361c in the six-task small-scale rerun (§8.7). That contrast demonstrates a plausible failure mechanism, but it compares one successful corrected task with 100 bridge trials while changing tasks, serving path and caps. It does not identify how much of the aggregate zero the bridge caused or exclude model limitations. The 0.0 is retained as a confounded diagnostic, not a controlled model-capability estimate. It is not set against the original single-task outcome, and no valid full-suite BankerToolBench capability estimate exists for this actor family. The fuller reported audit and evidence limitations are in Appendix D (Figure 8.5).

8.6 Externally blocked lanes and terminal states

Seven original benchmark contracts remain outside the completed evaluation scope: SDAB, BinaryAudit, LifeSciBench, AgentHarm, AppBench, OpenReward and FrontierMath. Their required benchmark payload or hosted evaluation scope is not available in this public package. Six are recorded as externally closed; OpenReward proceeds only through the separate BALROG replacement scope. These statuses are scope limits and not graded model failures. Private access correspondence, operational requests and account state are omitted. The following small-scale reruns keep original and substitute benchmarks separate (Figure 8.6).

8.7 Small-scale reruns of all fourteen lanes

This section adds a separate, smaller set of runs, made on 26 September 2026, to give every one of the fourteen lanes a measured number under one fixed protocol, including the lanes that never produced a score. None of these figures is pooled with, averaged against, or substituted for a result reported earlier in this chapter.

The protocol fixes one actor family, a fixed item-selection seed (20260926), temperature 0 and a non-thinking chat template, and scores each lane with its native grader where


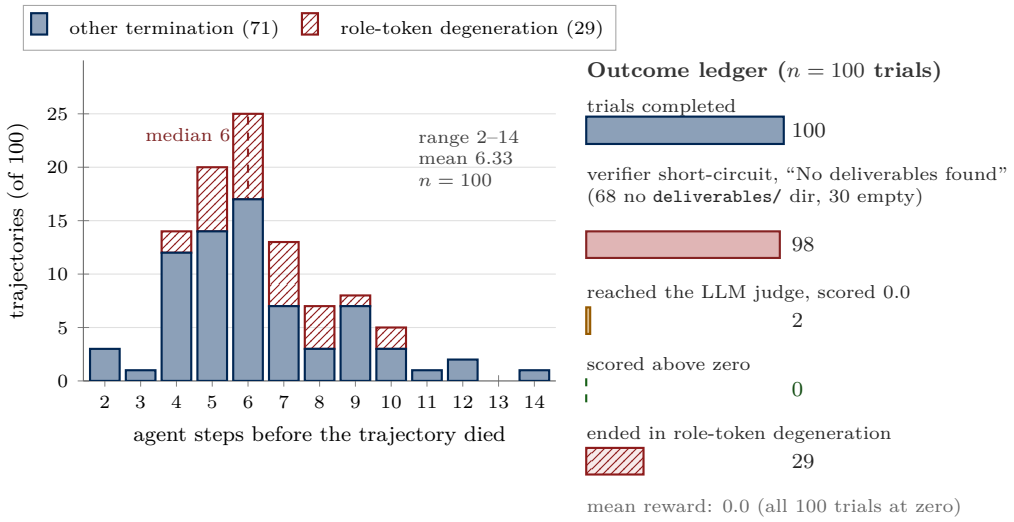


Figure 8.5: The E4 rerun diagnostic. Across 100 trials agents terminate at a median of roughly six steps without producing deliverables, and more than a quarter end in role-token degeneration, consistent with generation running past the end-of-turn token because the serving bridge passed no stop sequences. The causal share of the zero reward is unidentified: the corrected-path check changes task, path and caps together. Left: per-trajectory step counts (`final_metrics.total_steps`), stacked by whether the final agent message carries at least two concatenated role tokens (29/100; the ledger records "27+"). Right: where the verifier chain stopped (`verifier/test-stdout.txt`, `reward.json`), all bars on one scale. The earlier graphic dates the base-model rerun to 2026-09-21, but the recovered ledger still says not launched at its September 21 snapshot; the exact later run date is not verified here. Reported trial-directory root: `outputs/e4_banker_toolbench/`. These raw trial artefacts are absent from the reviewed checkout; the graphic preserves the historical summary rather than a fresh receipt-level verification.

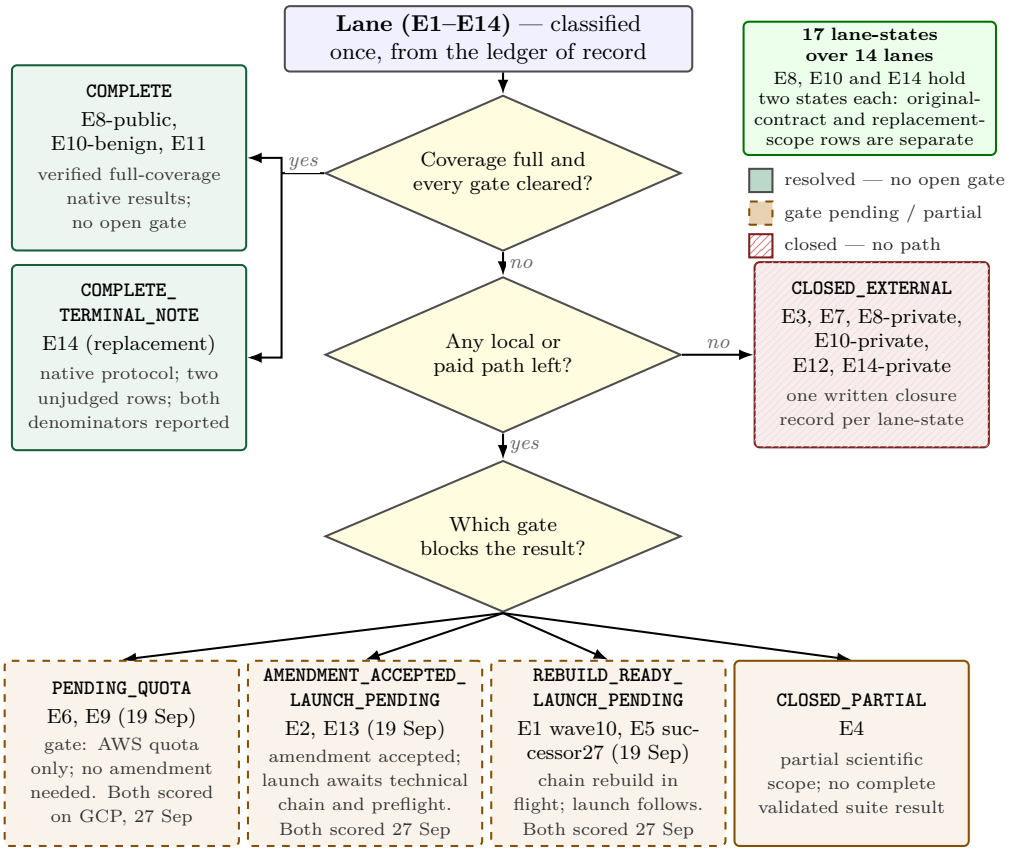

Source: `finish/Pending_Experiments.md`, "Terminal-state vocabulary", 19 Sep 2026 — the seven states shown are that table's full documented vocabulary, with the lane assignments of that date. The six lanes in the three pending leaves were all run and scored on 27 Sep 2026 under the lead's receipt (Chapter 8); the vocabulary itself is unchanged.

Figure 8.6: Terminal-state taxonomy used to close every lane. Each state has a defined meaning and a named reopen condition where one exists. The seven states are the ledger's full vocabulary; 17 lane-states cover 14 lanes because E8, E10 and E14 carry separate original and replacement rows. States classify lanes, not results: an unrecognised state is recorded as blocked rather than absorbed into a percentage, and original-contract and replacement-scope numbers are never pooled. The completion gate's `PARTIAL_EXACT`/`PARTIAL_RECOVERY` labels are a separate evidence-class vocabulary (Chapter 5). Lane assignments are those of 2026-09-19; the six lanes in the three pending leaves were all run and scored on 2026-09-27 (Chapter 8).

one could be run. Lanes whose original benchmark is externally blocked were run on a public substitute, and each substitute's gap from the original suite is recorded in its lane file. Items that errored or timed out are counted as failures in the denominator.

Two arms were run. The first is the base model, `Qwen/Qwen3.6-35B-A3B` with no adapter, sampled on Tinker (Table 8.A). The second is a paired comparison of the trained actor against the same base model, both served by one vLLM configuration on Modal, on identical items (Table 8.B). The pairing exists because the adapter's effect on individual token probabilities was measured to be about the same size as the numerical difference between the two serving engines on the same base weights, so a trained-on-vLLM against base-on-Tinker comparison would confound the adapter with the engine, and none is made.

Table 8.A. Base model on Tinker, small-scale subsets.

Lane	Benchmark run	Scope	Metric	Result	95% CI
E1	SWE-bench Pro public test split	original-public-subset	resolved rate	0/10 = 0.000	[0.00, 0.28]
E2	EffiBench	substitute	pass@1	23/30 = 0.767	[0.59, 0.88]
E3	Terminal-Bench v2.0	substitute	task success rate	4/8 = 0.500	[0.22, 0.78]
E4	BankerToolBench (official Harbor tasks)	original-public-subset	mean verifier reward	0.068 (n = 6; one nonzero task, 0.409)	— (insufficient support)
E5	tau2-bench	substitute	pass^1	3/10 = 0.300	[0.11, 0.60]
E6	MiniWoB++	substitute	episode success rate	15/36 = 0.417	[0.27, 0.58]
E7	BinaryAudit upstream cbd86c7	original-public-subset	task success rate	0/6 = 0.000	[0.00, 0.39]
E8	LAB-Bench public MCQ	substitute	accuracy	26/80 = 0.325	[0.23, 0.43]
E9	MLE-bench lite/low-complexity split	original-public-subset	any-medal rate	1/5 = 0.200	[0.04, 0.62]
E10	AgentHarm test_public	original-public-subset	harmful refusal rate	20/30 = 0.667	[0.49, 0.81]
E11	VerilogEval	original-public-subset	pass@1	35/50 = 0.700	[0.56, 0.81]
E12	AppBench public tasks	original-public-subset	rubric-item pass rate	122/151 = 0.808	— (six application clusters)
E13	BALROG	substitute	mean progression (%)	23.1%	—
E14	Omni-MATH test	substitute	accuracy	38/100 = 0.380	[0.29, 0.48]

Table 8.B. Trained actor versus base model on the same vLLM engine, identical items.

Lane	Items	Trained	Base	Trained − base	Test
E1	10	0.000	0.000	0.000	McNemar p = 1 (b/c 0/0)
E2	30	0.700	0.800	-0.100	McNemar p = 0.25 (b/c 0/3)
E3	8	0.625	0.375	0.250	McNemar p = 0.5 (b/c 2/0)
E4	6	0.066	0.093	-0.027	one nonzero pair (−0.160); no interval
E5	10	0.500	0.200	0.300	McNemar p = 0.38 (b/c 4/1)
E6	36	0.444	0.472	-0.028	McNemar p = 1 (b/c 1/2)
E7	6	0.167	0.000	0.167	McNemar p = 1 (b/c 1/0)
E8	80	0.312	0.312	0.000	McNemar p = 1 (b/c 6/6)
E9	5	0.000	0.000	0.000	McNemar p = 1 (b/c 0/0)
E9 (above median)	5	0.000	0.200	-0.200	McNemar p = 1 (b/c 0/1)
E10 (refusal rate)	30 harmful, 30 benign	0.700	0.667	0.033	McNemar p = 1 (b/c 3/2)
E10 (harm score)	30 harmful, 30 benign	0.247	0.236	0.011	95% CI [-0.053, 0.078]
E10 (benign score)	30 harmful, 30 benign	0.780	0.794	-0.015	95% CI [-0.050, 0.012]
E11	50	0.660	0.660	0.000	McNemar p = 1 (b/c 2/2)
E12	151	0.748	0.781	-0.033	McNemar p = 0.3 (b/c 5/10); app-level sign-flip p = 0.25 (n = 6)
E13	26	25.51	23.63	1.875	95% CI [-2.73, 7.09]
E14	100	0.430	0.440	-0.010	McNemar p = 1 (b/c 5/6)

These are small samples. Most lanes score between five and eighty items, so a single item moves a lane's rate by several percentage points and the confidence intervals are wide. In Table 8.B, b and c count items solved only by the trained actor and only by the base model respectively, and the CI is a paired bootstrap interval on the difference. Four lane-specific caveats matter. For E12 the 151 rubric items come from only six generated applications, so its item-level McNemar p-value treats clustered observations as independent; the corresponding item-level Wilson interval is also omitted from Table 8.A; the exact sign-flip test over the six per-app differences gives p = 0.25, and the grader is an LLM judge that is the base model itself, so the E12 rates are judge-dependent. For E4, only `btb-19b3361c` scores above zero in either arm (trained 0.397, base 0.557; 0.409 in Table 8.A), so the table omits an interval: an empirical bootstrap is computable

but has little support for inference beyond these six tasks. For E13, the 1.875 difference is the mean of per-environment differences computed from unrounded per-item values (recomputed 1.8752); the source rounds the two arm means to two decimals, so subtracting 25.51 − 23.63 loses precision. For E9, the one competition that earned a medal in the Tinker run (nomad2018) has a 46.8k-token prompt that exceeds the 32,768-token vLLM limit and fails identically in both vLLM arms, so the vLLM medal rates are not comparable with Table 8.A. The paired differences are not combined across lanes, and none of the seventeen paired tests excludes zero. At these sizes that is an inconclusive result, not evidence of no effect: with 5 to 10 items, an exact McNemar test needs at least six discordant items, all in one direction, to reach $p < 0.05$. No equivalence test was run. Fuller E12 detail and the principal per-lane caveats from each result file are in Appendix D.

8.8 Summary of the campaign at the point of writing

By the 19 September ledger the campaign had established two full-suite *harness scores* and one complete replacement scope with a harness score (all stored-evidence, not replayed): E1 at 2/731 = 0.274 per cent on SWE-bench Pro (593/713 patches corrupt for `git apply`; tests ran on the unpatched base), E11 at 129/312 = 41.35 per cent pass@1 (design-cluster bootstrap 95% interval [34.3, 48.7], n = 156 designs; 150/183 failures are extraction failures under a 1,024-token thinking-on cap) across its two framings, and E8 at 450/1967 = 0.2288 ([0.211, 0.248]) on the LAB-Bench public split (1,259/1,967 unparsed, 1,086 truncated), alongside a complete benign-utility harness evaluation of E10 at 88 of 97 episodes (0.907, [0.833, 0.950]), a terminal-complete E14 replacement scope with native accepted-set harness accuracy 2,271/4,426 = 51.31 per cent and separate all-disposition diagnostic 2,271/4,428 = 51.29 per cent (capped responses 34.5% correct vs 85.9% uncapped, confounded by difficulty), and five original-contract partials (E2, E4, E5, E7, E9), none of which is a suite score. Three scores have substantial protocol limitations: 593 of E1's 713 submitted patches were corrupt for `git apply`; E11 has 150 extraction failures under a 1,024-token cap with thinking on; and E14's capped responses are correct at 34.5% against 85.9% uncapped. The latter split is confounded by problem difficulty, and the E11 comparison changes several conditions together, so their causal budget effects remain unidentified (§8.2, §8.3). On 27 September six further replacement scopes were completed under a self-issued override whose deviations are recorded per lane (Tables 8.C and 8.D). Seven original contracts remain externally blocked, and no lane now waits on a launch or a cloud quota. The campaign did not establish a multi-seed estimate, a held-out security result, a BankerToolBench suite score, a graded result for the 108 WebArena tasks that need an LLM judge, or a

baseline comparison for the campaign lanes themselves; the only trained-versus-base comparison, Table 8.B, is inconclusive in every lane. The E8 diagnostic, E10 native receipt, training-identity verification, E14 terminal note and both pending-state snapshots are recovered in the private package while remaining absent from the frozen repository. Their receipt contents are now inspectable, and bounded stored-payload checks corroborate E8/E10 counts and the E14 denominator distinction; training-source, E4 raw-evidence and semantic-reproduction limits remain as in §8.2 and Appendix D. The available evidence chains, reproduction paths and gaps are given in Appendix B; the next chapter draws the cross-study synthesis and conclusions.

Part IV

Synthesis

Chapter 9

Cross-Study Synthesis, Threats to Validity, Conclusions and Future Work

9.1 Cross-Study Synthesis

This report has presented two bodies of work built with different instruments. The first is the P1–P8 corpus, which probes GRPO-style post-training across libraries, model scales, group sizes and datasets and ends in a reporting standard, a machine-readable registry and a controller audit. The second is the E1–E14 campaign, a governance-bound evaluation of one Tinker-trained actor against fourteen agentic and reasoning suites outside its recorded training-suite list; the recovered identity record does not establish content-level decontamination. They are the same methodological commitment applied twice — once to *what does GRPO do*, once to *what does a GRPO-trained actor score*. That commitment is attribution: each comparison identifies its intended contrast and the conditions actually controlled; coupled changes and unverified historical settings are reported alongside the number.

The corpus's own synthesis, recorded at the close of Phase 1, is that on this compute scale the *measurement* layer is useful while most *algorithmic* levers are noise-limited. **Scope limit (19 October 2026): that sentence is a claim about these tested stacks, budgets (30–50 steps), saturated or single-configuration tasks and seed counts only; repeated nulls at ceiling or underpowered designs do not support a general claim that algorithmic levers are noise-limited elsewhere.** The dominant measured phenomenon is advantage-signal starvation, with the Zero-Variance Fraction at approximately 0.72–0.77 on the Phase-1 main configuration, and it is easy-driven: the collapsed groups are mostly prompts the model has already solved. Within-group recentering alone cannot restore reward contrast when the observed rewards are identical. This does not rule out other estimators or interventions. The tested curriculum, which rejects equal-reward

groups from accepted updates while still paying for rejected sampling, returned no reliable held-out advantage. The narrow systems observation survived better than any algorithmic one: per-step telemetry separated the available method traces more cleanly than reward-only features, though the classifier's integrity generalisation was never tested.

The Semester 4 internal reports sharpen those threads rather than reversing them. P2's diagnostics are recomputable from stored raw tensors rather than read back from logged summaries: three stored GSM8K group tensors reproduce ZVF at 0.130, 0.190 and 0.155, pooling to 0.1583, while the historical outcome correlation, ρ = 0.27 (95% CI [−0.37, 0.88], source-labelled n = 23), mixes synthetic and measured rows and inconsistent outcome definitions. The executable lineage audit finds seventeen finite cells, nine synthetic. ZVF remains a recomputable diagnostic, but this pooled table does not test measured held-out prediction. The historical reward-adjusted result, r = +0.21 (95% CI [−0.31, +0.62], n = 17), uses the same mixed cohort and mixed source outcomes including late training reward. It is not independent measured-only evidence (Chapter 6 §6.3.4). P4's matched comparison of GRPO against Dr. GRPO finds the two held-out gains indistinguishable, with pooled mean completion length drifting from 194.4 to 183.5 tokens under a 200-token cap that bounds what the comparison can say. P4's companion error-bar audit grades the single P4-facing headline as DECISIVE: audit H7, the iter-136 arithmetic late-training-efficiency contrast, paired n = 5 seeds, d_z = +2.68. Re-examined, it is *suggestive* only (Chapter 6 §6.5.4). Its "one-sided parametric p = 0.031" is the floor of an exact one-sided Wilcoxon test at n = 5. The two-sided exact sign-flip p is 0.0625, even though all five pairs point the same way. The direction was one of eight hypotheses in its family, and Holm correction across those eight raises the family's p to 0.25. The audit's other three DECISIVE grades do not survive either. Two (H1, H2) rest on an interval that excludes its own point estimate and on four reconstructed budgets (§6.4.2; Table E.1), and one (H6) is an AUROC computed on a synthetic and imputed panel (§6.3.4). Of the seven audited headlines, then, none is decisive, one is suggestive and the rest are null or hypothesis-generating. What survives is a consistent-direction late-training efficiency contrast on a training metric, not a capability claim.

P3 and P7 both treat group size as a lever and are best read as a pair, because they disagree in emphasis. P3 finds that under saturation the retention ratio between G = 2 and G = 16 is approximately 1.00. That ratio is of last-10 training reward, and a seed-level TOST (n = 3, margin ±0.02) does not establish G = 16 as equivalent to G = 2 (p = 0.056; Chapter 6 §6.4.1). P3 also finds that the effective signal-to-noise ratio reaches only about 52% of the $\sqrt{G}$ ideal, and that a 505-task conditional utility audit selects G = 4 over G = 5 by 0.00177 with a 95% bootstrap interval of [0.00082, 0.00270] — positive, small, and explicitly cohort- and objective-conditional. P7 models usable signal per prompt as $S = p(1-p)(1-h_G(p))$ with $h_G(p) = p^G + (1-p)^G$, derives three falsifiable

consequences, and checks them: a 368-run Weights & Biases audit across six model labels (Appendix A, row P7-C1) reproduces the predicted U-shape in accuracy, with ZVF 0.95–0.97 at the low-reward extreme and 0.87–0.96 at the high-reward extreme and 0.25–0.29 at mid-range rewards of 0.35–0.50; a model × G grid confirms the monotone effect at interior accuracy, Qwen3-32B moving 0.33 → 0.18 → 0.08 across G = 4/8/16; and a toy-scale open-backward-pass experiment finds corr($\|\nabla\|$, p(1−p)) = +0.71 on a 0.5B model, which the P7 report labels directional only. Where P3's sweep could not find an optimum, P7 supplies a mechanism under which a shallow one should exist. That is a reconciliation, not a resolution: the mechanism is checked in telemetry, and its causal link to the gradient remains toy-scale.

The same report is clear about the control it does not have. A micro-jitter test collapses the exact-tie fraction from 0.158 to 0.000 while barely changing PCD, but the declared variance-threshold ZVF remains 0.158 (§6.3.1). It therefore does not establish superiority of PCD over tolerance-based ZVF. In a four-arm open-trainer audit, adaptive group size matches the best fixed-recipe held-out gain, +0.575, at 186 rollouts, while DAPO-style dynamic sampling drives ZVF to 0.00 at +45% rollout cost — an accuracy-versus-compute trade, not a controller win. In the larger 2,560-observation controller trace, 1,723 of 1,867 escalation events, 92.3%, occur on all-correct groups and only 144 on all-wrong, so a symmetric ZVF trigger spends most of its budget on observed all-correct groups. Eight successes do not prove latent p = 1, and the plug-in simulation's zero rescue is imposed by its estimator. Deleting those fires remains counterfactual because performance preservation was not measured. Adaptive group size is therefore not promoted to a recommended policy.

A separate frozen-checkpoint diagnostic now observes fresh responses directly (§7.4; Appendix B §B.12): 33/461 initially homogeneous groups became reward-mixed, 7.16% [5.14%, 9.88%]. Twenty first changes are strict-parser format failures with the same visible gold number; only 13/461 (2.82%) are assistant-audited numeric contrasts, comprising two recoveries and eleven new failures. The format effect belongs to this diagnostic contract, not the repository's more permissive historical evaluator. The numeric witnesses reject certainty from eight equal observations on this new checkpoint/task/decoder, but supply no historical-checkpoint reproduction, training or controller benefit, group-size optimum, or held-out capability estimate from the GSM8K train split.

P5 and P6 supply the corpus's methodological claim, and they contain its sharpest internal tension. P5's headline exhibits are a nominally matched-configuration backend audit whose final training rewards span 5.0% to 85.6% — a 17× same-label swing the P5 report declines to assign to the backend, because the managed stack also silently pinned a different base checkpoint (Qwen3-8B-Base on Tinker against the instruction-tuned

Qwen3-8B on TRL), and that undisclosed bundling is itself part of the exhibit — and a pair of runs carrying the same "DAPO" label in which an open trainer with true dynamic sampling produced mean ZVF 0.00 while a closed stack running an asymmetric-clip surrogate produced mean ZVF 0.58. Alongside them sits a third exhibit: a 12-cell head-to-head of four labelled algorithms on one fixed stack, landing within a 0.034 band with mean last-10 reward 0.710–0.744, a spread the P5 report calls comparable to seed-level variation. P5's framing is that a label-only comparison can hide stack-level variation, and that the converse also holds: in that particular fixed-stack panel, the four labels' mean training rewards fall within a narrow band; this does not establish equivalence or a universal absence of algorithm effects. P6 reads the same exhibit in the reverse direction, using it to motivate a schema while explicitly declining to re-claim it as novel empirical science; on the twenty seed entries the MIN-REPORT auditor badge spans 43–96, and *stackdiff* assigns the open-versus-closed "DAPO" pair the heuristic ordinal code R5 from declared manifest differences, without estimating a calibrated label-flip probability.

Two gaps should be named. The first is that P7's controller audit and P5's stack-attribution programme have not been joined: the controller is evaluated on open trainers where the update rule is auditable, while the standard is motivated by a closed-stack divergence that cannot be audited. The second is P8, the credit-card fraud side-probe, absorbed here as a measurement-discipline case study and nothing more. Its two AUCs are not a like-for-like ranking: XGBoost's 0.7955 and the Qwen3.5-4B SFT arm's 0.48268 on a positive-enriched 500-row held-out evaluation sit on different held-out splits by construction.

The E1–E14 campaign is a different instrument and should be read as one. Its figures have unequal source accessibility. The six original files covering five missing basenames listed in Appendix B §B.11 are now preserved in a withheld source archive, while remaining absent from the frozen checkout. Supplementary read-only payload checks corroborate stored E8/E10 counts and E14 disposition/denominator reporting; they do not rerun a model or scorer, independently judge correctness, establish global content decontamination or recover the dirty execution source and exact consumed training rows. Three original training-log files have separately been located locally and hash-matched to the identity receipt; their availability does not close those execution-provenance gaps (§B.11). A single Tinker-trained actor — base `Qwen/Qwen3.6-35B-A3B` at commit `995ad96e`…, with adapter `campaign-adapter` at commit `withheld-adapter-revision`…, in bfloat16 — was used in the E1–E14 evaluation campaign, whose completed, partial and blocked original/replacement scopes remain distinct. Evaluated scopes use the per-lane native contracts specified in Chapter 8. The recovered AgentDojo receipt binds version v1.2.2 but no upstream commit; the

broader revision claims retain their source-specific limits (§8.2). Three scopes closed strictly complete: two replacement scopes, LAB-Bench public at 1,967/1,967 across eight categories and AgentDojo benign utility with 97/97 episodes completed and utility 88/97 = 0.907 (Wilson 95% CI [0.833, 0.950]), and one original-contract suite, VerilogEval, at 312/312 with 129/312 = 41.35% pass@1 canonical (design-cluster bootstrap 95% CI [34.3%, 48.7%], resampling 156 paired designs (§8.2)). Omni-MATH closed terminal-complete under its native protocol, with all 4,428 dispositions recorded, 4,426 accepted, and native accepted-set accuracy of 2,271/4,426 = 51.31%. The separate all-disposition diagnostic is 2,271/4,428 = 51.29%, counting the two unjudged rows as failures. The recovered terminal note incorrectly associates that decimal with denominator 4,428; the thesis retains the corrected arithmetic and preserves the source unchanged (Table E.1; sources: recovered E14 terminal note and `stored-payload source audit`, Appendix B §B.11). Two suites carry full-coverage scores under their original contracts: SWE-bench Pro at 2/731 = 0.274% pass@1 (Wilson 95% CI [0.08%, 0.99%]) and VerilogEval, the same E11 result counted once. All three have substantial harness limitations: 593 of 713 SWE-bench Pro patches were corrupt for `git apply`, VerilogEval has many extraction failures, and Omni-MATH errors are associated with cap hits. Their causal budget effects are not isolated (§8.2, §8.3). Six further replacement scopes were run in full on 27 September 2026 (Table 8.C): CORE-Bench hard at 27/45 = 0.600, Tau3 at 8/97 = 0.082, WebArena at 90/812 = 0.111 (a lower bound, with 108 judge-dependent tasks ungraded), ML-Dev-Bench at 10/34 = 0.294, BALROG at 26.1% progression over 255 episodes, and SWE-bench Multilingual at 1/190 on the tasks not attempted before, kept separate from the earlier 4/110. Lane scope and status are tabulated once, in Table C.3. The rest are partial or externally blocked, each with a terminal state and a named gate.

What the campaign establishes is descriptive, and its scope matters. For *this* actor, at *this* revision, under *each suite's own* evaluator and denominator, these are the scores. It is not a post-training delta: no per-suite base-model comparator appears in the campaign ledger at the campaign's own scopes, so no campaign number, high or low, is evidence about what the GRPO step contributed. The one paired comparison of trained actor and base model is the 26 September small-scale rerun (Table 8.B): 14 lanes, 5 to 151 identical items each, one serving engine. It finds no significant difference in any lane, which at those sizes is inconclusive rather than evidence of no effect. The surviving E4 `prior_base_run` secondary record reports a BankerToolBench base-model rerun with mean reward 0.0 across 100 trials. The recovered finish ledger explicitly says the rerun was not yet launched at its 21 September snapshot, so it is not evidence for the later completion. The bridge finding documents omitted stop sequences and reports invented turns; the detailed historical claims of termination after 2–14 steps without `deliverables/`

output remain unverified against the still-unrecovered raw job receipt and trajectories. One corrected-path task achieved positive reward, supporting a concrete harness defect, but task, serving path and caps changed together; the fraction of the 100-trial zero attributable to that defect is unidentified. The result describes that model-plus-harness configuration (Section 8.5; sources: `outputs/e1_e14_small_scale_2026-09-26/E4/result.json`, `prior_base_run`; `outputs/e1_e14_small_scale_2026-09-26/E4/BRIDGE_STOP_TOKEN_FINDING.md`).

What governance bought is visible in the ledger itself: eleven of eleven named deterministic checks passing on 2026-09-19 (scope in Appendix B), and the recovered finish ledger preserving a historical snapshot recording E7 as "1/28 errored" visibly beside the superseding table's "1/46 attempted", without inventing a reconciliation.

9.2 Rigour and Threats to Validity

Public-checkout completeness (19 October 2026). The fresh public-checkout number audit is INCOMPLETE: 970 registered occurrences, 828 PASS, 22 CONTEXT (context-only, not independently checked), 120 ARTIFACT_MISSING; 33 of the 828 are arithmetic from printed counts and 501 are token-presence checks against the project's own source files, not raw recomputation, and `--check` exits 1 as intended (`reports/public_revision_2026-10-11/PUBLIC_CHECKOUT_NUMBER_AUDIT.json`). One in eight registered numbers cannot be traced from the public package, so affected claims are *reported, not publicly verifiable* (Table 1.1, §1.8). Recomputation from stored tensors and the design-cluster bootstrap are independent checks; registry-on-own-entries, same-step null correlations ($r = 0.92$ against a null derived from the same step's mean reward) and token checks against the project's own printed sources are closed-system consistency, not correctness. All actor-dependent campaign results are stored-evidence, not replayed: the dirty training source, exact consumed rows and sampler weights are unrecoverable in this package and are stated here once, prominently, rather than repaired by assertion.

What rigour was exercised. Diagnostics are recomputable from stored raw tensors, and headline structural claims were re-verified by eleven named deterministic code checks on 2026-09-19, all passing, covering exact divisions, receipt presence, sealed-artifact hash equality and lost-source absence probes. Held-out n is reported alongside every gain, and failed runs are counted rather than hidden: failed attempts remain part of the stated limitations.

Table 9.1 lists the threats discussed below, grouped as internal, construct and external, with the mitigation applied to each. Most mitigations narrow what is claimed rather than repair the evidence.

Threats to validity and the mitigation applied to each.

Table 9.1: Threats to validity and the mitigation applied to each. † marks figures drawn from Tinker data only; replicating them requires Tinker API access (`LIMITATIONS_AND_IMPACT.md` §6.3).

Type	Threat	Mitigation
Internal	T1. Most Tinker configurations ran once, so those runs carry no variance estimate or significance test; the relevant families have one to eight seeds, limiting precision; no universal seed count guarantees adequate power	Quantitative conclusions rest on multi-seed runs (three to eight seeds, listed below); single-seed Tinker figures are descriptive and marked †
Internal	T2. Horizons of 30–50 steps are early-training snapshots	Every claim is scoped to the observed horizon; no asymptotic or "converges to" claim is made
Internal	T3. The E4 pass3/pass16 per-task archive is lost; only `TINKER_BRIDGE.json` survives	0.3115 is reported as a receipt-only verifier recovery metric on 1 of 100 tasks (`CLOSED_PARTIAL`), not as a suite score and not as the 37 of 128 verifier criteria met
Construct	T4. Each lane uses its own native denominator (2/731, 90/812, 4,428 …)	No pooling within or across lanes; no comparison or ranking across denominators
Construct	T5. No cross-suite aggregate exists	Deliberate: an aggregate over native denominators has no referent

Type	Threat	Mitigation
Construct	T6. E10's completed scope measures benign utility only	The benign scope is named at every reference; no adversarial-robustness claim
Construct	T7. The retained E11 result used an original managed sampler route that is not reproducible from this public package	The lane is receipt-bound to its sampler path; no backend-parity claim
External	T8. Tinker's server-side loss, normalisation, batching and hardware are closed, and the SDK version moved (0.16.1 to 0.30.0)	The stack and SDK version are reported with each result; no numerical-parity claim
External	T9. Six original contracts lack third-party access (E3, E7, E8, E10, E12, E14)	Each lane has a terminal close-out record with a reopen condition; replacement scopes are reported under their own names

Statistical power: single-seed Tinker experiments. Most Tinker configurations ran once, because cost precluded repetition, and those single-seed runs carry no variance estimates or significance tests. The exceptions are stated where they occur. They are the three-seed-per-arm managed head-to-head (Chapter 7 §7.1), the five-seed Qwen3-8B held-out control ($p = 0.26$, Chapter 6 §6.5.4) and the Qwen3-8B scale extension. Henderson et al. (2018) motivate reporting variability across random seeds; no universal seed-count threshold guarantees power. A follow-up needs a prespecified effect size and power rationale. The seed counts are: one seed for most Tinker runs and all P1 anchors; three for the P3 sweep, the P4 GSM8K-CoT and scale-extension arms and the managed head-to-head; five for the same-stack PPO/GRPO contrast, the P4 arithmetic arms and the Qwen3-8B pre/post control; and eight for the variant audit (P11). The limitations document says the ten-seed bar was met for the TRL baseline and the GSM8K evaluation and then that the evaluation was cut to five seeds; the run records in Appendix A show five seeds for both the TRL Modal campaign (Table A.3) and the GSM8K pre/post evaluation. The 30B MoE scaling analysis uses three seeds; the bootstrap confidence intervals

assume independent observations, so any positive correlation from shared initialisation or data ordering would make the reported intervals too narrow, and the true intervals wider; and secondary analyses carry uncorrected p-values. Interpretation therefore depends on each result's seed count, design and available provenance. Open code improves inspectability but does not establish that every historical setting was recorded; managed multi-seed results retain their own stated uncertainty and source limits.

Horizons of 30–50 steps. The Tinker runs are early-training snapshots; long-horizon effects such as reward hacking, catastrophic forgetting and late-stage policy collapse are unlikely to manifest, and the source conclusion is direct: "Asymptotic claims are unsupported". This bounds results rather than vitiating them: P1's failure to recover a scaling law across roughly 2.4 orders of magnitude is a bounded negative, and P4's drift from 194.4 to 183.5 mean completion tokens is bounded by the 200-token cap.

Closed Tinker internals. The Tinker SDK exposes a custom loss path, a limited optimiser surface and standard LoRA hyperparameters, but not the exact server-side GRPO loss formulation, the reward normalisation or baseline-subtraction scheme, minibatch or gradient-accumulation strategy, hardware configuration, or system-level telemetry. This applies unevenly: the inspected custom-loss Tinker reference loops define their loss in client code (REINFORCE with a group-mean baseline, Table 4.2), while the actor's missing original execution source limits verification of its historical loss path (Appendix D), whereas the runners that use Tinker's built-in `importance_sampling` loss leave its server-side details unrecorded. The consequence is best quoted: Tinker results measure "the **platform's** implementation of GRPO, not an abstract algorithmic specification". The illustrative case in the limitations document compares a pooled last-10 training reward of 99.9% for Tinker GRPO with 73.4% for TRL GRPO on GSM8K. Those figures are training rewards, not held-out accuracy, and they pool Tinker runs on 4B–235B models against TRL on Qwen2.5-0.5B, so model size and implementation are confounded; the source itself attributes part of the gap to the model difference. The only same-model pair, Qwen3-8B, used the Base checkpoint on Tinker and the Instruct checkpoint on TRL (Table A.2), so it does not remove the confound either. The threat propagates into the campaign, whose actor was trained on Tinker. The SDK is also a moving target: Phase 1 pinned `tinker==0.16.1`, while the September 2026 bridge required `tinker==0.30.0` after the older SDK produced a no-longer-supported error.

Per-suite native denominators are not comparable. Every E1–E14 result is expressed on its own suite's denominator, and those denominators differ in size, in what they count and in what they exclude. SWE-bench Pro is 2/731, whose denominator retains 14 generation failures and 4 artifact losses alongside 713 native evaluations, 593 of which ran on the unpatched base because the submitted patch was corrupt for `git apply` (§8.3); APEX-Agents is 7/480; E9 MLE-bench is 40/75 competitions natively graded, stated as

53.33% coverage with a null suite score, because coverage and score are different quantities; E1's replacement SWE-bench Multilingual is 1/190 on one contract and 4/110 on another, never summed to a 300-task figure; E6 WebArena is 90/812 with 108 tasks ungraded, so its denominator counts items that were never graded; E13 BALROG is a mean of six per-environment means rather than a rate over episodes; and E14's Omni-MATH records 4,428 dispositions of which 4,426 were accepted, with native accuracy 51.31% over the 4,426 accepted judged rows and a separate all-disposition diagnostic of 51.29% (the recovered terminal note's contrary denominator label is corrected in Table E.1). A 41.35% on one denominator and a 0.274% on another do not license a comparison, an average or a ranking, and none is offered; the rule holds within lanes too, and the ledger states it flatly: "N/A means unverified; no pooled results".

No cross-suite aggregate. No mean, median or composite index over suites appears anywhere in this report or in the campaign materials it draws on: an aggregate over native denominators would be a number with no referent, mixing suites that measure different capabilities at different difficulties under different scoring rules. The cost is that the campaign has no single headline; the three strictly complete scopes, the terminal-complete Omni-MATH scope, the six replacement scopes completed on 27 September and the two original-contract scores are the most the record supports.

The E10 benign-utility scope says nothing about adversarial robustness. The E10 lane's completed evidence is a benign-utility evaluation of 97/97 completed tasks with utility 88/97 = 0.907 under AgentDojo's benign scope; its original contract, private AgentHarm tasks, is externally blocked and carries a closure record with a named reopen condition. The completeness result therefore carries no adversarial-robustness measurement, and this report makes no such claim for the trained actor. The lane has a dual-use dimension, though the limitations analysis finds the marginal uplift of the released artefacts small, because the base model's capability is overwhelmingly pre-existing: the pre-RL Qwen3-8B-Instruct checkpoint already scores 82.0% on held-out GSM8K, and full GRPO adds only +1.3 points to 83.3%, not significant at $p = 0.26$. The 82.0% is the same Instruct checkpoint before RL, not a separate base model.

The retained E11 result came through the original sampler. The 129/312 full-run receipt attributes its samples to the managed Tinker sampler rather than a locally served copy. Private execution and repository access identities are omitted, so this public package cannot replay the original route. A different serving stack would be a protocol change with unmeasured same-weights, different-sampler divergence. The separate four-task step-40 pilot has different source and decontamination limitations and is not substituted for the full run.

Known evidence loss in the finish-era recovery source. The record is explicit: the historical source-loss incident recorded in `withheld historical source-loss`

`chronology` removed the execution sources of the finish-era recovery and build code — the E1 wave-10 controller, the E9 restored dependencies and the E6 validator — while sealed requests, validation receipts and test logs survive with matching hashes, and the replacement lanes' native runners survive under `zvf-program/flagship/`. The lost-source policy was applied rather than waived: a faithful re-implementation was written into a tracked path under `zvf-program/e1_wave10/`, where it verifies 10/10 targeted regressions offline (`test_process_group.py` 4/4, `test_cleanup_regressions.py` 6/6). Two consequences follow: a sealed request without its execution source is not a re-run, so the E9 MLDevBench runtime recipe was never reconstructed (the 27 September run built a fresh environment on Google Cloud instead); and the policy response — execution sources henceforth live under tracked paths — cannot restore what was already lost. A related item: the Jev (TypeSafe) judgment harness lost reliability from roughly 13:10Z on 2026-09-19, both blocker-classification batteries returning degenerate distributions and a controlled yes-probe falling from about 1.0 to 0.3; the receipts are retained as incident evidence and the batteries must be re-run once the health check passes, so the ledger's first-uncleared-blocker column stands on document evidence rather than judgment output.

Scope and confound inventory. Several Phase-1 threats remain live. Many early runs logged train-set rewards only, so time-series comparisons spanning old and new runs must account for the instrumentation change. Initial phases used LoRA at ranks 8–64 exclusively; historical baseline comparisons use default hyperparameters from the Tinker cookbook and the TRL documentation; and no full learning-rate $\times$ rank $\times$ batch $\times$ group-size grid was swept. Tinker, Modal, Colab and the PES A100 node use different accelerators, memory hierarchies and training stacks, so observed differences in reward dynamics are not purely algorithmic, and the work was not pre-registered. The model-scale range is 0.6B–1T, with the anchors above 235B single-seed and descriptive (Chapter 6 §6.1); the limitations record's "reliable" range of 0.6B–235B is the multi-run part of that roster, so dense-70B and trillion-parameter MoE extrapolations are unreliable; benchmark coverage is narrow and biased toward verifiable rewards such as exact match, unit tests and schema validity, with no human preference data, so findings should not be extended to reward-model-based RLHF; and the work was carried out at one institution in Bengaluru, so benchmark choices and evaluation design reflect that context.

The resource accounting is itself a threat. The report estimates roughly 60 A100 GPU-hours of in-kind PES University compute and projects environmental use of about 776 kWh and about 296 kg CO_2-eq; the dominant uncertainty is the Tinker GPU-hour count, inferred because the platform exposes no hardware telemetry, giving a pessimistic Tinker contribution of about 540 kg against an optimistic one of about 130 kg. The mitigation offered is reproducibility by artefact.

9.3 Conclusions

This report set out to build a multi-framework training harness for GRPO-style post-training of large language models and to study that post-training under a single methodological rule: hold the stack fixed, change one factor, report what happens. The harness dispatches one configuration to several back-ends, but only Tinker and TRL produced completed runs, on different base checkpoints, so it is not a completed multi-framework benchmark. The four research questions of §1.4 have the following answers.

- **RQ1 (ZVF).** Yes, it is recomputable: the three stored Qwen3-8B tensors reproduce 0.130, 0.190 and 0.155 exactly. Its predictive validity remains unestablished: the historical outcome and collapse correlations mix synthetic and measured records, and the outcome is not a common held-out measure (§6.3; Table 1.1). Its magnitude is regime-dependent, from 0.16 to 0.84 across selected measured cohort means.
- **RQ2 (algorithm labels on a fixed stack).** Unanswered at this budget. PPO versus GRPO, GRPO versus Dr. GRPO and $G \in \{2, 4, 8, 16\}$ all sit at evaluation accuracy 0.98–0.99 on 0.5B two-digit arithmetic, and nulls at ceiling are not evidence of equivalence: they cannot separate no effect from no headroom. The unsaturated GRPO/Dr. GRPO comparisons (Qwen2.5-1.5B GSM8K-CoT; the eight-seed variant audit of §1.2) are inconclusive and establish no equivalence either (§6.2.3, §6.4, §6.5; Table 1.1). The saturated contrasts are pilot/feasibility evidence only. The same-stack rerun on the unsaturated Qwen2.5-1.5B GSM8K-CoT configuration bounds it further: the minimal untuned-critic PPO arm (8× the distinct-prompt exposure of GRPO G = 8, completions near the 200-token cap) shows no detectable gain while the GRPO arms gained; the post-training gap is +0.050 [+0.015, +0.085] (five paired seeds; exact sign-flip p = 0.0625, the n = 5 floor, first; paired-t p = 0.016 second), which is not evidence about PPO versus GRPO as algorithms, and G = 8 minus G = 2 is −0.005 [−0.038, +0.028], neither different nor equivalent at a ±0.02 margin (§6.5.5).
- **RQ3 (manifest comparison).** The tested open-versus-closed "DAPO" pair receives the heuristic code R5 from declared differences (§7.2). This demonstrates the comparison rule, not calibrated prediction of an outcome change.
- **RQ4 (governance-first evaluation).** It yields receipt-bound per-suite scores and an explicit terminal state for every lane (Table C.3). It does not yield a post-training delta: the actor had 40 training steps, and the paired Table 8.B comparison is inconclusive in every lane.

On the analytical side the contribution is a measurement layer and a set of bounded negatives. The Zero-Variance Fraction is a reproducible diagnostic of advantage-signal

starvation, recomputable from stored tensors, regime-dependent in magnitude (0.72–0.77 on the Phase-1 main configuration, 0.16 to 0.84 across selected measured cohort means; Table 1.1), with predictive validity unestablished. The historical pooled association (ρ = 0.27, 95% CI [−0.37, 0.88], reported n = 23) includes simulation and inconsistent outcome definitions, and actually uses seventeen finite cells. It cannot establish a measured held-out relationship. Its theory has been made falsifiable, and two of its three consequences reproduced: the U-shape in accuracy across reward levels and the monotone group-size effect; the gradient link remains toy-scale and directional. Group size therefore has a candidate mechanism, but the measured three-seed sweep found its arms statistically indistinguishable and establishes no optimum (Chapter 6 §6.4). Length bias is not established: the roster-level flag that marks four of eleven GRPO runs — peak before 65% of training, terminal reward below 90% of peak — has post hoc thresholds, is not specific to length, and fires on most runs in the wider trace pool, so it is not evidence of length bias; in the controlled comparison the same rule fires on both GRPO and Dr. GRPO (five of six GSM8K-CoT runs) while no run shows length growing, completion length drifts shorter, and the two are indistinguishable on held-out gain (Chapter 6 §6.5). No claim is made that Dr. GRPO is uniquely free of the pattern. The levers we could test — a naive curriculum, a matched-token-budget intervention, an integer group-size sweep — did not produce reliable held-out gains. The earlier same-stack de-confounds (PPO versus GRPO, GRPO versus Dr. GRPO, and group size) were all measured on a saturated 0.5B arithmetic task with evaluation accuracy near 0.99, so their nulls say that no difference was detectable there, not that the methods are equivalent; the 2 October unsaturated Qwen2.5-1.5B GSM8K-CoT rerun now supplies PPO/GRPO and G = 2 versus G = 8 contrasts (§6.5.5). Its +0.050 GRPO G8-minus-PPO estimate is baseline-specific: the minimal untuned-critic PPO arm shows no detectable gain while the GRPO arms gained (exact sign-flip p = 0.0625, the n = 5 floor; paired-t p = 0.016), while the group-size contrast remains inconclusive. PPO was minimal and untuned, prompt exposure differed, and the 200-token cap remained potentially binding. The strongest original contribution remains P5, the reporting standard, whose status the record states precisely: a targeted search of the GRPO, model-reporting and provenance literature through July 2026 did not identify an equivalent GRPO-specific machine-readable run datasheet with rollout provenance, and this is "an evidence-bounded novelty claim, not proof of non-existence". The earlier second bet — predictive layer freezing from step-1 behaviour — is weakened rather than withdrawn: it held at 1.5B and fell below the 0.25 independent-uniform top-nine-of-36 overlap reference at 3B across four seeds, with mean overlap 0.083 ± 0.048 (mean ± SD).

The E1–E14 campaign is an evaluation-governance contribution, not evidence about GRPO: the actor received 40 steps of critic-free policy-gradient training (§8.1.1), so its

scores describe a checkpoint rather than a training method. It delivered receipt-bound results on three strictly complete scopes (two replacements and one original contract), with Omni-MATH terminal-complete; full-coverage original-contract scores on two (E1 and E11); and explicit lane states and remaining gates (Table C.3). Original-contract and replacement-scope numbers are never pooled, no cross-suite aggregate is computed, and no improvement over the base model is claimed for this campaign: the paired Table 8.B comparison is inconclusive in every lane. The controlled Chapter 6 gains are separate, stack-specific findings. VerilogEval's 129/312 = 41.35% pass@1 at full coverage is an end-to-end harness score. Of its 183 failures, 150 are extraction failures, plausibly related to the 1,024-token cap with thinking enabled; missing per-sample finish reasons prevent a definitive causal attribution. On a 50-item subset the same adapter scores 33/50 with thinking off at 4,096 tokens against 23/50 in this run, but engine and temperature also changed. That comparison does not isolate the cap's effect or replace the full-run score. Operational source bindings remain outside this public derivative.

The report's overall conclusion is about method rather than algorithms. On this compute scale, and with these instruments, the measurements are informative while the algorithmic levers tested were not separable at these short horizons, saturated or single-configuration tasks and seed counts (a scoped finding, not a general claim that algorithmic levers are noise-limited); the stack is a material part of the result, so a label without its stack is not a reproducible experimental specification; and the most durable artefacts produced here are the ones that make other people's results checkable — the ZVF/PCD diagnostic layer, the eight-item minimum reportable stack (seven manifest fields and one evaluation item), the registry and its CLI, and a campaign ledger with named receipts and gates, with recovered primary receipts preserved separately from the frozen checkout and remaining raw-evidence and provenance limits stated explicitly (Appendix B §B.11).

9.3.1 C1 adds numerical witnesses and exposes reference limits (parser/reference audit case study, not a recovery-rate estimate)

Human-validity gap (19 October 2026). C1 reconciliation is assistant-assisted and provides no independent human validation; blind human rating of at least the 11 event cases is AUTHOR_TODO and has not been obtained in this copy. C1 is therefore reported strictly as an audit case study on a parser-zero-selected, first-64-of-87 cohort.

The C1 extension makes the evidence boundary more precise. Its frozen score is 11/64 on a deterministic first-64 subset, with a question-level Wilson 95% working-model interval of 9.88-28.21%. Assistant-assisted reconciliation corroborates three numer-

ical recovery witnesses on that unchanged denominator. Three further events retain convention-dependent interpretations, four are materially ambiguous and one matches an incorrect checkpoint reference after eight correct initial answers. The frozen score is preserved, not retrospectively repaired. Selection on parser zeros can enrich the reference faults and representation mismatches that prevent a direct mathematical-recovery interpretation (Appendix G, sources S1-S5).

These three witnesses show that eight observed wrong numerical answers do not force future numerical answers to remain wrong for this frozen checkpoint, task and decoder. They do not validate the reasoning in a successful response: Santana's earliest successful number was reached by an incorrect argument. They do not measure a gradient, training update, held-out capability or controller benefit. Reference auditing and unit-aware evaluation therefore belong in the measurement design before a future intervention is interpreted. The full 64-case audit retains thirteen category disagreements and provides no whole-benchmark error-prevalence estimate. Historical V2 remains separate and unpooled.

The separately frozen parser-v3 candidate passes only its narrow four-change extraction check in 2,048 prospectively selected future outputs. Preservation of 2,025 old-valid objects and agreement on four new scalar extractions do not establish task correctness or broad parser precision. The candidate remains undeployed; the C1 endpoint stays on parser v2 (Appendix G, sources S8-S9).

9.4 Future Work

The work leaves three kinds of open question: evaluation lanes whose measurement is incomplete, analytical claims that the present evidence could not settle, and methodological tools that have been built but not yet tested at scale.

Closing the remaining evaluation gaps. The six replacement lanes that were launch-pending or quota-blocked on 21 September were run to completion on 27 September 2026 with the reported lane outcomes (Chapter 8 §8.4). Two measurement gaps remain in them. The 108 WebArena tasks that need an LLM judge are ungraded because the judge was unavailable, and the native judge model has since been retired, so a re-grade would record a judge substitution. SWE-bench Multilingual has been attempted on all 300 tasks, but under two serving contracts, so a single 300-task figure would need the first 110 tasks rerun under the 27 September contract (32,768-token context and the re-implemented source collector). Six original-contract scopes are recorded `CLOSED_EXTERNAL` with written closure records: E3 (SDAB private bundle), E7 (BinaryAudit private payload), E8-original (LifeSciBench package), E10-original (Agen-

tHarm private tasks), E12 (AppBench deployment) and E14-original (FrontierMath hosted evaluation). A seventh original contract, E13's OpenReward held-out games, is also blocked on external access but has no closure record, because the lane continues through its BALROG replacement scope (Table C.3). A new evaluation would require the unavailable benchmark scope. A full BankerToolBench score for E4 would be a new-runtime experiment; the recovered pending-state ledger recorded a grader-only cost estimate before launch, withheld from this public derivative. The later 100-trial zero-mean rerun is reported separately by `outputs/e1_e14_small_scale_2026-09-26/E4/result.json` (`prior_base_run`) and remains a confounded diagnostic with its raw job receipt unrecovered, not a suite capability estimate or a result substantiated by that pending-state ledger (§8.5).

Turning the campaign into a post-training measurement. The campaign reports scores for one actor, not the contribution of the training step. The paired same-engine comparison of §8.7 (Table 8.B) is the first base-model arm; scaling it from 5–151 items per lane to the full native scopes, with more than one training seed and a longer training run than the actor's 40 steps, would turn each lane from a descriptive score into a post-training delta. The original execution route is not reproducible from this public package. A future controlled rerun on an explicitly documented serving stack would measure the currently unmeasured sampler divergence.

Settling the analytical questions. Five Phase-1 directions remain open, each answering a threat identified above:

- adequately powered evaluation, moving from the Phase-1 probes' held-out n of 8–20 (the multi-seed controlled comparisons already use 200–500 items, Chapter 1 §1.5) to the full GSM8K test split or a large stratified subset at five or more seeds;
- a token-budget-optimal curriculum with staleness bounds, tested multi-seed;
- testing whether the mid-to-late band in the per-layer gradient profile supports a FLOP-saving freeze schedule, even though step-1 predictability did not survive scaling;
- hardening the Phase-1 method-trace classifier on grouped run-level and temporal splits rather than row-wise cross-validation;
- consolidating the diagnostic findings and the reporting standard for publication.

Three more follow from the Chapter 6 results. The first is a length-confounded regime, with the completion cap lifted and longer horizons, in which a Dr. GRPO length advantage would be expected to appear if it exists. The second is the head-to-head protocol between ZVF and the pairwise-contrast density, to test whether PCD meets its target association. The third extends the unsaturated same-stack rerun of §6.5.5: a PPO arm with

a warmed-up, tuned critic and generalised advantage estimation, so that the GRPO–PPO gap can be separated from critic quality, and enough seeds or evaluation items to resolve the G = 2 versus G = 8 contrast at a ±0.02 margin.

Testing the methodological tools. Three extensions come from the Semester-4 work:

- a pre-registered controller bakeoff against static G = 16 and naive boundary heuristics, the test P7 declines to claim in advance of;
- a cross-framework divergence study that runs an identical task, reward, decoding and seed configuration across TRL, veRL, OpenRLHF and Tinker, turning P5's attribution argument from an audit of existing runs into a designed experiment;
- dogfooding the registry schema on the campaign's own runs, so that every future benchmark result ships with a verifiable provenance record.

Two commitments carry forward, because the threats above are structural rather than incidental. The first is the never-pool rule: original-contract and replacement-scope numbers stay separate, and per-suite native denominators are never averaged. The second is that failures are reported with their mechanism, as the E11 sampler path, the E4 zero, the lost execution sources and the seed-count discrepancy are here.

References

[1] J. Schulman, P. Moritz, S. Levine, M. I. Jordan, and P. Abbeel, "High-dimensional continuous control using generalized advantage estimation," in *International Conference on Learning Representations (ICLR)*, 2016, arXiv:1506.02438.

[2] Madhu Kumara L, Sandhya Jeyaraj, Mohammad Rafi, Arumugam Chetty K, Arvind C R, and Dhruva N Murthy, "Literature survey — RL for LLMs: A systematic GRPO scaling study," PES University, Bengaluru, M.Tech Semester-3 Capstone Literature Survey (Group 6), 2026.

[3] P. F. Christiano, J. Leike, T. B. Brown, M. Martic, S. Legg, and D. Amodei, "Deep reinforcement learning from human preferences," in *Advances in Neural Information Processing Systems*, vol. 30, 2017, arXiv:1706.03741.

[4] N. Stiennon, L. Ouyang, J. Wu, D. Ziegler, R. Lowe, C. Voss, A. Radford, D. Amodei, and P. F. Christiano, "Learning to summarize with human feedback," in *Advances in Neural Information Processing Systems*, vol. 33, 2020, pp. 3008–3021.

[5] L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray *et al.*, "Training language models to follow instructions with human feedback," in *Advances in Neural Information Processing Systems*, vol. 35, 2022, arXiv:2203.02155.

[6] D. M. Ziegler, N. Stiennon, J. Wu, T. B. Brown, A. Radford, D. Amodei, P. Christiano, and G. Irving, "Fine-tuning language models from human preferences," 2019. [Online]. Available: https://arxiv.org/abs/1909.08593

[7] N. Jaques, S. Gu, D. Bahdanau, J. M. Hernández-Lobato, R. E. Turner, and D. Eck, "Sequence tutor: Conservative fine-tuning of sequence generation models with KL-control," in *Proceedings of the 34th International Conference on Machine Learning (ICML)*, 2017, arXiv:1611.02796.

[8] N. Jaques, A. Ghandeharioun, J. H. Shen, C. Ferguson, À. Lapedriza, N. Jones,

S. Gu, and R. Picard, "Way off-policy batch deep reinforcement learning of implicit human preferences in dialog," arXiv preprint arXiv:1907.00456, 2019.

[9] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, "Proximal policy optimization algorithms," arXiv preprint arXiv:1707.06347, 2017.

[10] R. Zheng, S. Dou, S. Gao, Y. Hua, W. Shen, B. Wang, Y. Liu, S. Jin, Q. Liu, Y. Zhou *et al.*, "Secrets of RLHF in large language models part i: PPO," arXiv preprint arXiv:2307.04964, 2023.

[11] Z. Shao, P. Wang, Q. Zhu, R. Xu, J. Song, X. Bi, H. Zhang, M. Zhang, Y. K. Li, Y. Wu, and D. Guo, "DeepSeekMath: Pushing the limits of mathematical reasoning in open language models," arXiv preprint arXiv:2402.03300, 2024.

[12] A. Ahmadian, C. Cremer, M. Gallé, M. Fadaee, J. Kreutzer, O. Pietquin, A. Üstün, and S. Hooker, "Back to basics: Revisiting REINFORCE-style optimization for learning from human feedback in LLMs," in *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2024, pp. 12 248–12 267, arXiv:2402.14740.

[13] D. Guo, D. Yang, H. Zhang, J. Song, P. Wang, Q. Zhu, R. Xu, R. Zhang, S. Ma, X. Bi *et al.*, "DeepSeek-R1 incentivizes reasoning in LLMs through reinforcement learning," *Nature*, vol. 645, no. 8081, pp. 633–638, 2025, preprint: DeepSeek-AI, "DeepSeek-R1: Incentivizing Reasoning Capability in LLMs via Reinforcement Learning", arXiv:2501.12948.

[14] R. Rafailov, A. Sharma, E. Mitchell, S. Ermon, C. D. Manning, and C. Finn, "Direct preference optimization: Your language model is secretly a reward model," in *Advances in Neural Information Processing Systems*, vol. 36, 2023, arXiv:2305.18290.

[15] M. G. Azar, M. Rowland, B. Piot, D. Guo, D. Calandriello, M. Valko, and R. Munos, "A general theoretical paradigm to understand learning from human preferences," arXiv preprint arXiv:2310.12036, 2023.

[16] K. Ethayarajh, W. Xu, N. Muennighoff, D. Jurafsky, and D. Kiela, "KTO: Model alignment as prospect theoretic optimization," arXiv preprint arXiv:2402.01306, 2024.

[17] J. Hong, N. Lee, and J. Thorne, "ORPO: Monolithic preference optimization without reference model," arXiv preprint arXiv:2403.07691, 2024.

[18] Y. Meng, M. Xia, and D. Chen, "SimPO: Simple preference optimization with a reference-free reward," arXiv preprint arXiv:2405.14734, 2024.

[19] Y. Zhao, R. Joshi, T. Liu, M. Khalman, M. Saleh, and P. J. Liu, "SLiC-HF: Sequence likelihood calibration with human feedback," arXiv preprint arXiv:2305.10425, 2023.

[20] Y. Wu, L. Ma, L. Ding, M. Li, X. Wang, K. Chen, Z. Su, Z. Zhang, C. Huang, Y. Zhang *et al.*, "It takes two: Your GRPO is secretly DPO," arXiv preprint arXiv:2510.00977, 2025.

[21] Z. Liu, C. Chen, W. Li, P. Qi, T. Pang, C. Du, W. S. Lee, and M. Lin, "Understanding R1-Zero-like training: A critical perspective," in *Conference on Language Modeling (COLM)*, 2025, arXiv:2503.20783.

[22] Q. Yu, Z. Zhang, R. Zhu, Y. Yuan, X. Zuo, Y. Yue, W. Dai, T. Fan, G. Liu, L. Liu *et al.*, "DAPO: An open-source LLM reinforcement learning system at scale," *arXiv preprint*, 2025, arXiv:2503.14476.

[23] C. Zheng, S. Liu, M. Li, X.-H. Chen, B. Yu, C. Gao, K. Dang, Y. Liu, R. Men, A. Yang *et al.*, "Group sequence policy optimization," arXiv preprint arXiv:2507.18071, 2025.

[24] Y. Yue, Y. Yuan, Q. Yu, X. Zuo, R. Zhu, W. Xu, J. Chen, C. Wang, T. Fan, Z. Du *et al.*, "VAPO: Efficient and reliable reinforcement learning for advanced reasoning tasks," arXiv preprint arXiv:2504.05118, 2025.

[25] H. Zheng, Y. Zhou, B. R. Bartoldson, B. Kailkhura, F. Lai, J. Zhao, and B. Chen, "Act only when it pays: Efficient reinforcement learning for LLM reasoning via selective rollouts," arXiv preprint arXiv:2506.02177, 2025.

[26] Z. Lin, M. Lin, Y. Xie, and R. Ji, "CPPO: Accelerating the training of group relative policy optimization-based reasoning models," arXiv preprint arXiv:2503.22342, 2025.

[27] G. Nan, S. Chen, J. Huang, M. Lu, D. Wang, C. Xie, W. Xiong, X. Zeng, Q. Zhou, Y. Li *et al.*, "NGRPO: Negative-enhanced group relative policy optimization," arXiv preprint arXiv:2509.18851, 2025.

[28] X. Zhang, S. Wu, Y. Zhu, H. Tan, S. Yu, Z. He, and J. Jia, "Scaf-GRPO: Scaffolded group relative policy optimization for enhancing LLM reasoning," in *International Conference on Learning Representations (ICLR)*, 2026, arXiv:2510.19807.

[29] Y. Ichihara, Y. Jinnai, T. Morimura, M. Sakamoto, R. Mitsuhashi, and E. Uchibe, "MO-GRPO: Mitigating reward hacking of group relative policy optimization on multi-objective problems," arXiv preprint arXiv:2509.22047, 2025.

[30] K. Yang, Z. Chen, Y. Wang, Z. Li, N. Cheng, S. Wang, and J. Xiao, "SSPO: Subsentence-level policy optimization," arXiv preprint arXiv:2511.04256, 2025.

[31] T.-L. V. Le, M. Jeon, K. Vu, V. Lai, and E. Yang, "No prompt left behind: Exploiting zero-variance prompts in LLM reinforcement learning via entropy-guided advantage shaping," in *International Conference on Learning Representations (ICLR)*, 2026, arXiv:2509.21880.

[32] Z. Zhang, Z. Han, C. Mavromatis, Q. Zhu, Y. Zhang, S. Guan, D. Wang, X. Zhou, S. Wang, S. Adeshina *et al.*, "Train less, learn more: Adaptive efficient rollout optimization for group-based reinforcement learning," arXiv preprint arXiv:2602.14338, 2026.

[33] K. Zhang, Y. Hong, J. Bao, H. Jiang, Y. Song, D. Hong, and H. Xiong, "GVPO: Group variance policy optimization for large language model post-training," in *Advances in Neural Information Processing Systems*, 2025, arXiv:2504.19599.

[34] Y. Wang, J. Zhao, C. Zhao, S. Guan, G. Penn, and S. Liu, "λ-GRPO: Unifying the GRPO frameworks with learnable token preferences," arXiv preprint arXiv:2510.06870, 2025.

[35] Y. Kim, "MC-GRPO: Median-centered group relative policy optimization for small-rollout reinforcement learning," arXiv preprint arXiv:2601.22582, 2026.

[36] Y. Guo, W. Deng, Z. Cheng, and X. Tang, "G^2RPO-A: Guided group relative policy optimization with adaptive guidance," arXiv preprint arXiv:2508.13023, 2025.

[37] F. Zhang, X. Ma, Z. Dong, X. Leng, J. Zhao, X. Sun, Y. Yang, and G. Jiang, "Revisiting reinforcement learning with verifiable rewards from a contrastive perspective," arXiv preprint arXiv:2605.12969, 2026.

[38] I. Mahrooghi, A. Lotfi, and E. Abbe, "Goldilocks RL: Tuning task difficulty to escape sparse rewards for reasoning," arXiv preprint arXiv:2602.14868, 2026.

[39] X. He, Q. Sun, A. Cheng, X. Li, X. Ji, H. Lu, R. Huang, and Q. Hu, "Advantage collapse in group relative policy optimization: Diagnosis and mitigation," in *Proceedings of the 43rd International Conference on Machine Learning (ICML)*, 2026, arXiv:2605.21125.

[40] N. Lambert, J. Morrison, V. Pyatkin, S. Huang, H. Ivison, F. Brahman, L. J. V. Miranda *et al.*, "Tulu 3: Pushing frontiers in open language model post-training," *arXiv preprint*, 2024, arXiv:2411.15124.

[41] J. Hu, X. Wu, W. Shen, J. K. Liu, Z. Zhu, W. Wang, S. Jiang, H. Wang, H. Chen, B. Chen *et al.*, "OpenRLHF: An easy-to-use, scalable and high-performance RLHF framework," arXiv preprint arXiv:2405.11143, 2024.

[42] G. Sheng, C. Zhang, Z. Ye, X. Wu, W. Zhang, R. Zhang, Y. Peng, H. Lin, and C. Wu, "HybridFlow: A flexible and efficient RLHF framework," arXiv preprint arXiv:2409.19256, 2024.

[43] Z. Yao, R. Y. Aminabadi, O. Ruwase, S. Rajbhandari, X. Wu, A. A. Awan, J. Rasley, M. Zhang, C. Li, C. Holmes *et al.*, "DeepSpeed-Chat: Easy, fast and affordable RLHF training of ChatGPT-like models at all scales," arXiv preprint arXiv:2308.01320, 2023.

[44] W. Kwon, Z. Li, S. Zhuang, Y. Sheng, L. Zheng, C. H. Yu, J. E. Gonzalez, H. Zhang, and I. Stoica, "Efficient memory management for large language model serving with PagedAttention," in *Proceedings of the 29th Symposium on Operating Systems Principles (SOSP)*, 2023, arXiv:2309.06180.

[45] L. Zheng, L. Yin, Z. Xie, C. Sun, J. Huang, C. H. Yu, S. Cao, C. Kozyrakis, I. Stoica, J. E. Gonzalez *et al.*, "SGLang: Efficient execution of structured language model programs," arXiv preprint arXiv:2312.07104, 2023.

[46] T. Dao, D. Y. Fu, S. Ermon, A. Rudra, and C. Ré, "FlashAttention: Fast and memory-efficient exact attention with IO-Awareness," arXiv preprint arXiv:2205.14135, 2022.

[47] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "LoRA: Low-rank adaptation of large language models," in *International Conference on Learning Representations (ICLR)*, 2022, arXiv:2106.09685 (2021).

[48] K. Cobbe, V. Kosaraju, M. Bavarian, M. Chen, H. Jun, L. Kaiser, M. Plappert, J. Tworek, J. Hilton, R. Nakano *et al.*, "Training verifiers to solve math word problems," arXiv preprint arXiv:2110.14168, 2021.

[49] J. Vendrow, E. Vendrow, S. Beery, and A. Madry, "Do large language model benchmarks test reliability?" arXiv preprint arXiv:2502.03461, 2025.

[50] D. Hendrycks, C. Burns, S. Kadavath, A. Arora, S. Basart, E. Tang, D. Song, and J. Steinhardt, "Measuring mathematical problem solving with the MATH dataset," in *Advances in Neural Information Processing Systems (Datasets and Benchmarks Track)*, 2021, arXiv:2103.03874.

[51] H. Lightman, V. Kosaraju, Y. Burda, H. Edwards, B. Baker, T. Lee, J. Leike, J. Schulman, I. Sutskever, and K. Cobbe, "Let's verify step by step," in *International Conference on Learning Representations (ICLR)*, 2024, arXiv:2305.20050 (2023).

[52] M. Mitchell, S. Wu, A. Zaldivar, P. Barnes, L. Vasserman, B. Hutchinson, E. Spitzer, I. D. Raji, and T. Gebru, "Model cards for model reporting," in *Proceedings of the Conference on Fairness, Accountability, and Transparency (FAT*)*, 2019, pp. 220–229.

[53] T. Gebru, J. Morgenstern, B. Vecchione, J. W. Vaughan, H. Wallach, H. Daumé III, and K. Crawford, "Datasheets for datasets," *Communications of the ACM*, vol. 64, no. 12, pp. 86–92, 2021.

[54] E. M. Bender and B. Friedman, "Data statements for natural language processing: Toward mitigating system bias and enabling better science," *Transactions of the Association for Computational Linguistics (TACL)*, vol. 6, pp. 587–604, 2018.

[55] M. Pushkarna, A. Zaldivar, and O. Kjartansson, "Data cards: Purposeful and transparent dataset documentation for responsible ai," in *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency (FAccT '22)*, 2022, pp. 1776–1826.

[56] P. Henderson, R. Islam, P. Bachman, J. Pineau, D. Precup, and D. Meger, "Deep reinforcement learning that matters," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 32, no. 1, 2018.

[57] C. Colas, O. Sigaud, and P.-Y. Oudeyer, "A hitchhiker's guide to statistical comparisons of reinforcement learning algorithms," *arXiv preprint*, 2019, arXiv:1904.06979.

[58] R. Agarwal, M. Schwarzer, P. S. Castro, A. C. Courville, and M. Bellemare, "Deep reinforcement learning at the edge of the statistical precipice," in *Advances in Neural Information Processing Systems*, vol. 34, 2021, pp. 29 304–29 320, arXiv:2108.13264; supplementary materials at https://agarwl.github.io/rliable/.

[59] S. M. Jordan, A. White, B. Castro da Silva, M. White, and P. S. Thomas, "Position: Benchmarking is limited in reinforcement learning research," in *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024, arXiv:2406.16241.

[60] J. Dodge, S. Gururangan, D. Card, R. Schwartz, and N. A. Smith, "Show your work: Improved reporting of experimental results," in *Proceedings of the 2019*

Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), 2019, pp. 2185–2194.

[61] J. Pineau, P. Vincent-Lamarre, K. Sinha, V. Larivière, A. Beygelzimer, F. d'Alché Buc, E. Fox, and H. Larochelle, "Improving reproducibility in machine learning research: A report from the NeurIPS 2019 reproducibility program," *Journal of Machine Learning Research*, vol. 22, no. 164, pp. 1–20, 2021. [Online]. Available: https://jmlr.org/papers/v22/20-303.html

[62] E. Miller, "Adding error bars to evals: A statistical approach to language model evaluations," arXiv preprint arXiv:2411.00640, 2024.

[63] S. Biderman, H. Schoelkopf, L. Sutawika, L. Gao, J. Tow, B. Abbasi, A. F. Aji, P. S. Ammanamanchi, S. Black, J. Clive *et al.*, "Lessons from the trenches on reproducible evaluation of language models," arXiv preprint arXiv:2405.14782, 2024.

[64] A. Hochlehnert, H. Bhatnagar, V. Udandarao, S. Albanie, A. Prabhu, and M. Bethge, "A sober look at progress in language model reasoning: Pitfalls and paths to reproducibility," in *Conference on Language Modeling (COLM)*, 2025, arXiv:2504.07086.

[65] P. Liang, R. Bommasani, T. Lee, D. Tsipras, D. Soylu, M. Yasunaga, Y. Zhang, D. Narayanan, Y. Wu, A. Kumar *et al.*, "Holistic evaluation of language models," *Transactions on Machine Learning Research*, 2023, arXiv:2211.09110.

[66] J. Kaplan, S. McCandlish, T. Henighan, T. B. Brown, B. Chess, R. Child, S. Gray, A. Radford, J. Wu, and D. Amodei, "Scaling laws for neural language models," arXiv preprint arXiv:2001.08361, 2020.

[67] J. Hoffmann, S. Borgeaud, A. Mensch, E. Buchatskaya, T. Cai, E. Rutherford, D. de Las Casas, L. A. Hendricks, J. Welbl, A. Clark *et al.*, "Training compute-optimal large language models," arXiv preprint arXiv:2203.15556, 2022.

[68] J. Hilton, J. Tang, and J. Schulman, "Scaling laws for single-agent reinforcement learning," *arXiv preprint*, 2023, arXiv:2301.13442.

[69] L. Gao, J. Schulman, and J. Hilton, "Scaling laws for reward model overoptimization," in *Proceedings of the 40th International Conference on Machine Learning (ICML)*, ser. Proceedings of Machine Learning Research, vol. 202, 2023, pp. 10 835–10 866, arXiv:2210.10760 (2022).

[70] R. Rafailov, Y. Chittepu, R. Park, H. Sikchi, J. Hejna, B. Knox, C. Finn, and S. Niekum, "Scaling laws for reward model overoptimization in direct alignment algorithms," in *Advances in Neural Information Processing Systems*, vol. 37, 2024, arXiv:2406.02900.

[71] D. Nimmaturi, V. Bhargava, R. Ghosh, J. George, and D. Dutta, "Predictive scaling laws for efficient GRPO training of large reasoning models," *arXiv preprint*, 2025, arXiv:2507.18014; identifies three consistent training phases: slow start, rapid improvement, plateau.

[72] Z. Tan, H. Geng, X. Yu, M. Zhang, G. Wan, Y. Zhou, Q. He, X. Xue, H. Zhou, Y. Fan, Z. Li, Z. Zhang, G. Zhang, C. Zhang, Z. Yin, P. Torr, and L. Bai, "Scaling behaviors of LLM reinforcement learning post-training: An empirical study in mathematical reasoning," *arXiv preprint arXiv:2509.25300*, 2025.

[73] C. Snell, J. Lee, K. Xu, and A. Kumar, "Scaling LLM test-time compute optimally can be more effective than scaling model parameters," arXiv preprint arXiv:2408.03314, 2024.

[74] T. Dettmers, A. Pagnoni, A. Holtzman, and L. Zettlemoyer, "QLoRA: Efficient finetuning of quantized LLMs," in *Advances in Neural Information Processing Systems*, vol. 36, 2023, arXiv:2305.14314.

[75] S. Mukherjee, L. Yuan, D. Hakkani-Tur, and H. Peng, "Reinforcement learning finetunes small subnetworks in large language models," in *Advances in Neural Information Processing Systems*, vol. 38, 2025, arXiv:2505.11711.

[76] P. Wang, L. Li, Z. Shao, R. X. Xu, D. Dai, Y. Li, D. Chen, Y. Wu, and Z. Sui, "Math-shepherd: Verify and reinforce LLMs step-by-step without human annotations," arXiv preprint arXiv:2312.08935, 2023.

[77] M. Song, Z. Su, X. Qu, J. Zhou, and Y. Cheng, "PRMBench: A fine-grained and challenging benchmark for process-level reward models," arXiv preprint arXiv:2501.03124, 2025.

[78] L. Luo, Y. Liu, R. Liu, S. Phatale, M. Guo, H. Lara, Y. Li, L. Shu, Y. Zhu, L. Meng *et al.*, "Improve mathematical reasoning in language models by automated process supervision," arXiv preprint arXiv:2406.06592, 2024.

[79] S. Xia, X. Li, Y. Liu, T. Wu, and P. Liu, "Evaluating mathematical reasoning beyond accuracy," arXiv preprint arXiv:2404.05692, 2024.

[80] L. Yuan, W. Li, H. Chen, G. Cui, N. Ding, K. Zhang, B. Zhou, Z. Liu, and H. Peng, "Free process rewards without process labels," arXiv preprint arXiv:2412.01981, 2024.

[81] T. Zeng, S. Zhang, S. Wu, C. Classen, D. Chae, E. Ewer, M. Lee, H. Kim, W. Kang, J. Kunde *et al.*, "VersaPRM: Multi-domain process reward model via synthetic reasoning data," arXiv preprint arXiv:2502.06737, 2025.

[82] S. Yao, D. Yu, J. Zhao, I. Shafran, T. L. Griffiths, Y. Cao, and K. Narasimhan, "Tree of thoughts: Deliberate problem solving with large language models," in *Advances in Neural Information Processing Systems*, 2023, arXiv:2305.10601.

[83] X. Wang, J. Wei, D. Schuurmans, Q. Le, E. Chi, S. Narang, A. Chowdhery, and D. Zhou, "Self-consistency improves chain of thought reasoning in language models," in *International Conference on Learning Representations (ICLR)*, 2023, arXiv:2203.11171.

[84] J. Zhang and C. Zuo, "GRPO-LEAD: A difficulty-aware reinforcement learning approach for concise mathematical reasoning in language models," arXiv preprint arXiv:2504.09696, 2025.

[85] P. Aggarwal and S. Welleck, "L1: Controlling how long a reasoning model thinks with reinforcement learning," in *Conference on Language Modeling (COLM)*, 2025, arXiv:2503.04697.

[86] X. Li, H. Zou, and P. Liu, "LIMR: Less is more for RL scaling," arXiv preprint arXiv:2502.11886, 2025.

[87] B. Jin, H. Zeng, Z. Yue, J. Yoon, S. Arik, D. Wang, H. Zamani, and J. Han, "Search-R1: Training LLMs to reason and leverage search engines with reinforcement learning," arXiv preprint arXiv:2503.09516, 2025.

[88] Y. Zuo, K. Zhang, L. Sheng, S. Qu, G. Cui, X. Zhu, H. Li, Y. Zhang, X. Long, E. Hua *et al.*, "TTRL: Test-time reinforcement learning," arXiv preprint arXiv:2504.16084, 2025.

Part V

Appendices

Appendix A

Historical Run Registry and Coverage Reconciliation

This appendix records the historical run inventories used by the report and the later reconciliation of those inventories. It is not an exhaustive current account history. Provider logging identities, independent scientific executions, checkpoint revisions, and claim-to-run links are different units and must not be added as though they were interchangeable. Run identifier, library and platform, base model, algorithm, group size, dataset, seed, steps, and terminal status are retained where a primary source records them; unknown fields remain unknown. A claim without supporting primary evidence must be qualified or withdrawn rather than inferred from an inventory count.

Historical inventories differ in scope and counting units. Provider-ledger entries, opening-study records, claim links and independent scientific trials are not interchangeable. This public derivative omits all account-wide totals, project breakdowns and exact provider identities. Only scientific study configurations, denominators, outcomes and limitations are retained; it makes no complete-coverage claim.

A.1 Historical boundary and source scope

The Semester-3 boundary is the public tag `capstone-final-2026-04-25`, commit `21a99ef7` dated 23 April 2026. Attribution of inherited and individual work rests on commit history, not provider-account ownership or activity counts. The study tables below retain scientific configurations, seeds, steps, outcomes and evidence tiers. Operational identifiers are withheld; locally named scientific study units remain for interpretation.

Historical source scope in the public derivative.

Table A.1: Historical source scope; no account-level project census is included.

Source category	Public interpretation
Historical provider-ledger snapshots	Source-accounting records, not independent experiment counts; account breakdowns are omitted
Scientific study records	Reported configurations, seeds, steps, outcomes and limitations appear in the following study tables

A.2 Semester-3 shared benchmark runs

The Semester-3 contribution was the multi-framework benchmark infrastructure: a common harness, a fixed evaluation configuration, and integrations for several independent RL post-training libraries. These runs are the shared baseline measurements, and they are the ones for which the registry is *most* complete, because each was produced under a declared configuration.

Cross-framework comparison at the fixed benchmark configuration. Configuration for all four rows: model `Qwen/Qwen3-8B` (Tinker row uses `Qwen/Qwen3-8B-Base`), algorithm GRPO, group size G = 8, learning rate 1e-5, dataset GSM8K[:500], 30 steps, seed 42. Metric is `last10_avg`, the mean of the final ten reported training rewards. Source: `platform_hybrid/experiments/results/framework_comparison.json`, generated by `aggregate_framework_comparison.py`.

Table A.2: Semester-3 cross-framework shared benchmark runs.

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`campaign_v2_w1_qwen3-8b-base`	Tinker	Qwen/ Qwen3-8B-Base	GRPO	8	gsm8k-500	42	30	last10 = 0.85625 — **real run**
`modal_trl_trl_qwen3_8b`	TRL on Modal H100	Qwen/ Qwen3-8B	GRPO	8	gsm8k-500	42	30	last10 = 0.05, 735.7 s — **real run**
`verl-dryrun`	verl	Qwen/ Qwen3-8B	GRPO	8	gsm8k-500	42	30	last10 = 0.5528 — **seeded dryrun, not a training run**

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`openrlhf-dryrun`	OpenRLHF	Qwen/ Qwen3-8B	GRPO	8	gsm8k-500	42	30	last10 = 0.4785 — **seeded dryrun, not a training run**

The two `dryrun` rows are a documented threat to validity, not a result: the generator falls back to a deterministic seeded trace from `verl.VERLTrainer` / `OpenRLHFTrainer` when the framework is absent from the sandbox, and the JSON carries the note "Seeded deterministic fallback … (verl not installed in sandbox)". Any comparison reading them as measurements of verl or OpenRLHF is invalid. The Tinker row also initialises from the *base* checkpoint while the open-framework rows use the instruction-tuned one, so even the two real rows are not a clean framework contrast.

Modal multi-framework campaign, 4 frameworks × 5 seeds = 20 runs. Source: `modal_results_all.json` (repository root). Seeds are 42, 123, 456, 789, 1024, one run per seed, dataset arithmetic/math. Only the five TRL rows record a model (`Qwen/Qwen2.5-0.5B`), a step count (125 training steps) and a GPU (NVIDIA L4). The fifteen PPO rows record final accuracy, wall time and a learning curve indexed by environment steps (to about 100,000), but no model, optimizer-step count or GPU; those fields are shown as "not recorded". Group size is not recorded in the artefact and is therefore shown as "—".

Table A.3: Semester-3 Modal campaign runs.

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`trl_grpo_math`	TRL / Modal L4	Qwen/ Qwen2.5-0.5B	GRPO	—	math	42, 123, 456, 789, 1024	125	final acc 0.735 / 0.810 / 0.620 / 0.740 / 0.765; 136.4–183.7 s
`sb3_ppo_math`	Stable-Baselines3 / Modal	not recorded	PPO	—	math	42, 123, 456, 789, 1024	~100k env. steps	final acc 0.003 / 0.014 / 0.011 / 0.012 / 0.010; `steps_to_95` null for all five

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
cleanrl_ppo_math	CleanRL / Modal	not recorded	PPO	—	math	42, 123, 456, 789, 1024	~100k env. steps	final acc 0.010 / 0.008 / 0.014 / 0.009 / 0.004; 25.4–32.4 s
tianshou_ppo_math	Tianshou / Modal	not recorded	PPO	—	math	42, 123, 456, 789, 1024	~100k env. steps	final acc 0.011 / 0.002 / 0.005 / 0.002 / 0.009; 1.67–3.30 s

Group-size sweep, shared-harness runs. Source: platform_hybrid/experiments/results/groupsize_zvf_sweep.tsv (per-run data in groupsize_zvf_sweep.json). Model Qwen/Qwen2.5-0.5B on a synthetic arithmetic-correctness task, 3 seeds per group size (42, 123, 456; 12 runs), 40 steps, 16 prompts per step, one NVIDIA A10 on Modal, with held-out accuracy on 200 fresh problems per run. An earlier version of this table labelled these runs Qwen3-8B / Tinker / GSM8K. The raw per-run records contradict that label, and the held-out figures below match the raw records exactly. Held-out accuracy is the mean ± SE over seeds; mean ZVF is the mean zero-variance fraction.

Table A.4: Semester-3 group-size sweep runs.

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
groupsize_g2	Modal A10 (shared harness)	Qwen/ Qwen2.5-0.5B	GRPO	2	arithmetic, 200 held-out	3 seeds	40	held-out acc 0.9817 ± 0.0044; mean ZVF 0.8380
groupsize_g4	Modal A10 (shared harness)	Qwen/ Qwen2.5-0.5B	GRPO	4	arithmetic, 200 held-out	3 seeds	40	held-out acc 0.9883 ± 0.0017; mean ZVF 0.7635
groupsize_g8	Modal A10 (shared harness)	Qwen/ Qwen2.5-0.5B	GRPO	8	arithmetic, 200 held-out	3 seeds	40	held-out acc 0.9900 ± 0.0029; mean ZVF 0.6906
groupsize_g16	Modal A10 (shared harness)	Qwen/ Qwen2.5-0.5B	GRPO	16	arithmetic, 200 held-out	3 seeds	40	held-out acc 0.9783 ± 0.0060; mean ZVF 0.6312

Additional exploratory records are retained in the historical source corpus. Incomplete

configuration fields prevent treating all inventory entries as comparable scientific trials. This public derivative omits account-level breakdowns.

A.3 Semester-4 P1–P8 study runs

The P1–P8 series is the individual Semester-4 contribution, and its runs are indexed by *claim* rather than by project. The audit ledger at `platform_hybrid/experiments/results/claim_to_run/` maps each published claim to its supporting run identifiers, provider references retained in the non-public source records, whether the model named in the paper matches the model actually trained, the seed and step counts, the held-out metric, and an evidence tier. The retained claim map has eighteen scientific claim rows. Private link and provider-inventory counts are omitted; the table retains the scientific evidence tiers and study outcomes.

P1–P8 claim-to-run ledger. Tier vocabulary: A = ≥5 seeds and ≥100 steps; B = 3–4 seeds and 50–99 steps; C = completed/descriptive; R = deterministic resource or schema claim; X = unlinked, contradicted, or provenance-conflicted. These are project-defined descriptive tiers, not a validated universal quality scale; crossing a seed or step threshold does not by itself establish valid inference.

Table A.5: Semester-4 P1-P8 study runs: each claim mapped to its linked runs, stack, model and algorithm.

Claim	Linked runs (representative)	Stack	Model	Algo	G	Dataset	Seeds / steps	Outcome	Tier
P1-C1	20 — [operational identifier withheld]	Tinker (managed) + W&B	5 GSM8K anchors: Qwen3.5-4B, Qwen3-8B, Llama-3.1-8B-Instruct, Nemotron-120B, DeepSeek-V3.1	—	—	GSM8K	1 per anchor (seed 42) / 20–30	No held-out metric on the exact-linked runs; the claim rests on training-reward traces	C
P1-C2	1 — [operational identifier withheld] (HF-arbitrated)	Tinker (managed) + HF adapter	`nvidia/NVIDIA-Nemotron-3-Super-120B-A12B-BF16` (MoE, A12B active)	—	—	`frontier_gsm8k`	1 (seed 42) / 20	Peak 0.875, last-10 0.1625, zero-reward step fraction 0.55 (11/20); no held-out metric	C

Claim	Linked runs (representative)	Stack	Model	Algo	G	Dataset	Seeds / steps	Outcome	Tier
P2-C1	80 local rows pooled to 23 cells	Local analysis pool (no W&B)	Heterogeneous; Qwen3-8B at G = 8 among the listed rows	—	—	GSM8K	up to 3 per source row / 30–600	Historical source: Spearman 0.56, point-biserial 0.62 (n = 23); actually 17 finite, 9 synthetic; measured interpretation withdrawn	C
P2-C2	80 (as P2-C1)	as P2-C1	as P2-C1	—	—	GSM8K	as P2-C1	Spearman ρ = 0.27, bootstrap 95% CI [−0.37, 0.88] (historical n = 23; actually 17 finite, 9 synthetic; mixed outcome)	C
P3-C1	12 — [operational identifier withheld]	W&B-managed open trainer; no Tinker identity	Qwen/ Qwen3.5-4B	—	2, 4, 8, 16	— (saturated arithmetic regime; dataset not recorded)	3 per G (seeds 0, 1, 2) / 8	Mean held-out Δ: G=2 +0.0000, G=4 +0.0000, G=8 −0.0625, G=16 +0.0000; evaluation size not logged	C
P3-C2	5 — [operational identifier withheld]	W&B, sampling only	— (G = 32 cells)	—	32	—	5 cells / 0 optimizer steps	No matched G = 4/G = 32 training replication; the comparison cannot be executed	X
P4-C1	6 — `local:drgrpo_gsm8k_cot:grpo:seed42`	Local	Qwen/ Qwen2.5-1.5B-Instruct as mapped (abstract says Qwen3-8B) — conflict	GRPO / Dr.GRPO	—	GSM8K CoT	3 per arm (42, 123, 456) / 30	GRPO 0.2017→0.2633 (Δ +0.0617); Dr.GRPO 0.2050→0.2550 (Δ +0.0500); n = 200/seed	X
P5-C1	2 — [operational identifier withheld], [identifier withheld]	Tinker-managed versus TRL backend	Qwen/ Qwen3-8B-Base versus Qwen/ Qwen3-8B — confounded	GRPO / TRL-GRPO	8	GSM8K	1 per backend (seed 42) / 30	Final/last-10 training reward 0.050→0.856; no held-out metric	X
P5-C2	2 — [identifier withheld], [identifier withheld]	Open trainer versus managed stack	Qwen2.5-0.5B-Instruct versus Qwen3.5-4B (declared non-consistent exhibit)	DAPO label versus asymmetric-clip surrogate	—	—	2 open versus 3 managed / not logged (open), 15 (managed)	Mean ZVF 0.00 versus 0.58; no comparable held-out metric	C
P5-C3	1 — [identifier withheld]	Managed summary	Qwen/ Qwen3.5-4B	Four algorithm labels	—	—	3 per arm (42, 123, 456) / 15	Last-10 reward band 0.710–0.744 (width 0.034); no held-out metric	C

Claim	Linked runs (representative)	Stack	Model	Algo	G	Dataset	Seeds / steps	Outcome	Tier
P6-C1	48 registry entries	Registry (schema validation)	N/A	N/A	N/A	N/A	N/A	44/48 entries pass schema validation in the later claim-to-run snapshot (`claim_to_run_table.tsv`, which adds amendment entries); the 31/31 of §7.2 is the 31 records shipped with P6	R
P6-C2 (source-identity audit)	Private source reconciliation omitted	Cross-source metadata	N/A	N/A	N/A	N/A	Not a training or evaluation study	Unresolved attribution limits retained; no public inventory claim	R
P7-C1	368 — [operational identifier withheld]	W&B only (0 exact Tinker IDs)	Qwen3-4B-Instruct-2507 (113), Llama-3.2-3B (112), Llama-3.2-1B (107), 3 further models (36)	—	4, 8, 16 (also 6)	— (prompt and tokenizer families `llama3`, `qwen3_instruct` recorded, not datasets)	10 logged labels (0–9) / 2–12	ZVF U-shape reproduced; no held-out metric in the W&B summaries	C
P7-C2	1 — [identifier withheld]	W&B (Colab)	Qwen/ Qwen2.5-0.5B-Instruct	—	—	—	3 (0, 1, 2) in one aggregate / 30	Gradient magnitude versus $p(1-p)$: Pearson r = +0.71	C
P7-C3	1 — [identifier withheld]	W&B (Colab)	Qwen/ Qwen2.5-0.5B-Instruct	Adaptive-G versus fixed recipes	—	—	1 per arm / not logged	Adaptive-G held-out Δ +0.575; mean ZVF 0.23; 186 rollouts	C
P8-C1	1 — `local:qp8_fraud:xgboost:seed42`	Local (XGBoost)	Gradient-boosted trees (200 estimators, depth 6)	—	N/A	Synthetic card-fraud: 50,000 rows; 10,000-row held-out split	random_state 42 / 200 estimators	AUC 0.7955 on the 10,000-row held-out split	C
P8-C2	1 — [operational identifier withheld]	Tinker (managed SFT)	Qwen/ Qwen3.5-4B	SFT row serialisation (no KL, no reference policy)	N/A	Row-to-text serialisations; 500-row positive-enriched held-out subset	1 (seed 0) / 63 mini-batches	AUC 0.482675, accuracy 0.792 (n = 500) — near chance	C
P8-C3	0 — UNLINKED	—	Proposed sensor / scribe / triage architecture	—	—	—	0 / 0	No execution; operational benefit over XGBoost alone not measured	X

Three facts here are load-bearing. First, **no empirical headline row in the P1–P8 ledger reaches Tier A or B** under the statistical-rigor thresholds; the rectified P1–P8 tally is C = 12, R = 2, X = 4. P11 adds an eight-seed matched block but does not meet the stated Tier A step threshold, as clarified below. Second, the four Tier X rows are X for specific, checkable reasons: **P3-C2** rests on G = 32 *sampling* cells with zero optimizer steps, so no matched G = 4/G = 32 training replication exists; **P4-C1**'s abstract names Qwen3-8B while every mapped run is `Qwen/Qwen2.5-1.5B-Instruct`; **P5-C1** compares `Qwen/Qwen3-8B-Base` against `Qwen/Qwen3-8B`, so the base checkpoint changes together with the backend and the pair must not be cited as a backend-only causal effect; and **P8-C3** is a proposed architecture with no execution, hence zero linked runs. Third, some cross-provider model-identity conflicts remain unresolved. Their private identity reconciliation is outside this public package; the affected scientific model-attribution claims remain contested.

Two column caveats travel with the table. The dataset cell for P7-C1 is — because the ledger's only dataset-adjacent field for those 368 runs is a prompt/tokenizer family (`llama3`, `qwen3_instruct`, `gpt_oss_low_reasoning`, `nemotron3_disable_thinking`), not a dataset name. And the P3 sweep here is **not** the Semester-3 sweep of Table A.4: it is a different project (`study logging group`), a different model (Qwen3.5-4B), and it reports deltas of 0.0000 rather than held-out accuracies near 0.99. The two share a group-size grid and nothing else. Chapters 4 and 6 cite the Table A.4 sweep (Qwen2.5-0.5B) whenever they give the 0.838 → 0.631 ZVF decline or the 0.98–0.99 held-out figures. They do not cite P3-C1.

The extension ledger added in August 2026 carries five rows besides P11: P10-C1 is Tier R (an algebraic identity, not an empirical result), P10-C2 and P12-C2 are Tier X (placeholder figures and unlinked prospective claims, zero runs), and P12-C1 is Tier R as a lemma and Tier X as an empirical headline.

P11 is an eight-seed, matched-stack block of 40 arm–seed units at `local:zvf-program/audit/results/full/{grpo,dapo,gspo,drgrpo,aero}-seed-{11,23,37,53,71,89,107,131}.json`, five arms × eight seeds on one stack (Qwen3-8B, GSM8K, 30 steps, Colab A100, held-out n = 500). Its headline contrast, DAPO versus GRPO, is $\Delta = +0.001$, percentile-bootstrap CI [−0.0045, +0.00675] (paired-t 95% CI [−0.0063, +0.0083], n = 8 seeds; the bootstrap undercovers at this n), $\mathrm{MDE}_{80} = 0.01012$, all raw $p > 0.21$, with Benjamini–Hochberg rejecting nothing. The mechanism is visible in the diagnostic: DAPO's mean ZVF is 0.000 against GRPO's 0.693, bought with 3.61× the rollouts (1,734 versus 480) and 1.44× the wall clock. This eight-paired-seed contrast finds no detectable held-out difference at the stated budget; it does not establish universal equality. Every retained P11 final manifest specifies `max_steps=30`; the 40 units are 30-step runs. Accordingly this block does **not** satisfy the stated Tier A requirement of at

least 100 steps per run and remains Tier C under the vocabulary above. Pooling steps across arms or seeds does not satisfy that per-run requirement. This corrects the evidence tier, not the recorded rewards, seed counts, interval, or null result.

A.3.1 Opening and null-result runs

Chapter 6 reports four null families — a mixed-variance curriculum, a matched token budget, hard-prompt filtering, and step-1 layer selection (§6.4.3) — and each rests on source-specific scientific result records rather than an account-wide inventory. The rows are counted from the per-run `name` (or mode) fields of each artefact's JSON — `results.json` for the curriculum, token-budget, hard-prompt and loss-formulation blocks, `result.json` and its siblings for P1 — not from an inventory API, which is why this cohort is reported as its own total. Three neighbouring blocks add nothing to it: the P3 group-size artefacts are already indexed — `groupsize_zvf/results.json` reproduces the per-group deltas of Table A.5's P3-C1 row exactly, and the second sweep file is discussed below — and the P2, P7 and P8 "openings" (`p2_openings/collapse_baseline_analysis.json`, `p7_controller/sim.json`, `p8_openings/*.json`) are zero-compute re-analyses that launch no runs.

Semester-4 opening and null-result runs (46 runs). Model is `Qwen/Qwen3.5-4B` and dataset GSM8K unless a row says otherwise. All rows are Tinker-managed except the P1 layer-freeze block, which ran on Colab for per-layer gradient access. "Curriculum" means training only on non-collapsed (mixed-variance) groups. Group sizes marked *default* are the launch defaults of the scripts in `platform_hybrid/experiments/openings/`; only the campaign artefact records a group size per run. Δ is the change in held-out accuracy.

Table A.6: Semester-4 opening and null-result runs: the curriculum, token-budget, hard-prompt, loss-formulation and layer-freeze blocks.

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`campaign/baseline-G4-s0…s5`	Tinker → W&B `study logging group` (`campaign`)	Qwen/ Qwen3.5-4B	GRPO	4	GSM8K	0–5	8	6 runs; mean Δ +0.0111 (0.0000–0.0333)
`campaign/curriculum-G4-s0…s5`	Tinker → W&B `study logging group` (`campaign`)	Qwen/ Qwen3.5-4B	GRPO + curriculum filter	4	GSM8K	0–5	8	6 runs; mean Δ +0.0167 (-0.0667 to +0.0667); oversample 3.3–7.2×; zero-loss fraction 0.0

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`campaign/baseline-G2-s0`	Tinker → W&B `study logging` group (`campaign`)	Qwen/ Qwen3.5-4B	GRPO	2	GSM8K	0	8	1 run; Δ 0.0000; zero-loss fraction 0.7
`campaign/baseline-G8-s0`	Tinker → W&B `study logging` group (`campaign`)	Qwen/ Qwen3.5-4B	GRPO	8	GSM8K	0	8	1 run; Δ −0.1333
`campaign/baseline-G16-s0`	Tinker → W&B `study logging` group (`campaign`)	Qwen/ Qwen3.5-4B	GRPO	16	GSM8K	0	8	1 run; Δ +0.0333
`curriculum_opening/baseline`	Tinker → W&B `study logging` group (ungrouped)	Qwen/ Qwen3.5-4B	GRPO	4 *default*	GSM8K	0	8	1 run; Δ +0.0500; held-out 20; zero-loss fraction 0.50
`curriculum_opening/curriculum`	Tinker → W&B `study logging` group (ungrouped)	Qwen/ Qwen3.5-4B	GRPO + curriculum filter	4 *default*	GSM8K	0	8	1 run; Δ +0.0500; held-out 20; oversample 4.81×; zero-loss fraction 0.00; superseded, see below
`token_budget/baseline-b30000-s0…s2`	Tinker → W&B `study logging` group (`token-budget`)	Qwen/ Qwen3.5-4B	GRPO	4 *default*	GSM8K	0–2	30k-token budget	3 runs; mean Δ +0.0278; no groups skipped
`token_budget/curriculum-b30000-s0…s2`	Tinker → W&B `study logging` group (`token-budget`)	Qwen/ Qwen3.5-4B	GRPO + curriculum filter	4 *default*	GSM8K	0–2	30k-token budget	3 runs; mean Δ +0.0278; 11–20 groups skipped per seed
`hard_curriculum/baseline-hard-s0…s2`	Tinker → W&B `study logging` group (`hard-curriculum`)	Qwen/ Qwen3.5-4B	GRPO	6 *default*	GSM8K hard-learnable pool (40 of 300 probed)	0–2	10	3 runs; mean Δ +0.0278; zero-loss fraction 0.1–0.2
`hard_curriculum/curriculum-hard-s0…s2`	Tinker → W&B `study logging` group (`hard-curriculum`)	Qwen/ Qwen3.5-4B	GRPO + curriculum filter	6 *default*	GSM8K hard-learnable pool (40 of 300 probed)	0–2	10	3 runs; mean Δ 0.0000; zero-loss fraction 0.0
`p4_surprise/{sum,mean,surprise}-s0…s1`	Tinker → W&B `study logging` group (`p4-surprise`)	Qwen/ Qwen3.5-4B	GRPO, loss variant	4 *default*	GSM8K	0–1	8	6 runs; mean Δ +0.1250 (sum) / 0.0000 (mean) / +0.0417 (surprise)
`p1_layerfreeze/result.json`	Colab L4	Qwen/Qwen2.5-1.5B-Instruct	— (gradient probe, no optimizer steps)	—	—	—	5	1 run; step-1 predicts final top-layer set at overlap 1.0; top-25% concentration 0.476

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
`p1_layerfreeze/scaled_4seed_result.json`	Colab L4	Qwen/Qwen2.5-3B-Instruct	GRPO	4	GSM8K (24 problems)	0–3	10	4 runs; overlap 0.0833 ± 0.0481 — below the 0.25 uniform top-nine-of-36 reference; concentration 0.3908
`p1_layerfreeze/freeze_flop_result.json`	Colab L4	Qwen/Qwen2.5-1.5B-Instruct	GRPO (step-1-frozen arm)	—	—	0–1	—	4 runs, full and frozen arms; frozen arm gains 0.0000 against 0.0625 at 60.7% of the parameter count
`p1_layerfreeze/emergence_result.json`	Colab L4	Qwen/Qwen2.5-1.5B-Instruct	GRPO (step-1 layer selection)	—	—	0–1	—	2 runs; mean step-1 overlap 0.643

Three provenance notes belong with this table, because two of its blocks carry superseded siblings and one carries a refuted claim. First, `campaign/FINDINGS.md` describes a nine-run, three-seed version of the campaign on a twelve-prompt held-out set with arm means of +0.028 and −0.028; `campaign/results.json` holds fifteen runs over six seeds on a thirty-prompt held-out set (0.8667 = 26/30), and the table follows the per-run file. The FINDINGS warning that `zero_loss_frac` was invalid (an empty-metrics-dict bug, "since fixed") belongs to the nine-run batch, not to that file. Second, the P1 layer-freeze block has the same shape: the two-seed 3B pass (overlap 0.1111 ± 0.0000) is superseded by the four-seed pass (0.0833 ± 0.0481), and both are below the 0.25 expected overlap fraction for independent uniform nine-of-36 sets. This is a descriptive reference, not a significance test. The toy-scale overlap of 1.0 must not be read as a transferable layer-selection signal. Third, the two single-seed training blocks flagged SUSPECT by independent verification (kimi, 2026-07-06) are superseded by the multi-seed blocks above: the curriculum opening's +0.05 (campaign curriculum and baseline arms separate by 0.006 over six seeds, at 3.3–7.2× oversample cost), and a single-seed G = 4 gain of +0.125 in `p3_groupsize/sweep_results.json` — the campaign's G4 seed-0 baseline gains 0.0000, not 0.125, and that sweep file retains only two of its twelve entries, so the W&B group is its record.

A.3.2 Same-stack rerun on the unsaturated configuration

The rerun of §6.5.5 was executed on Modal on 2 October 2026 by `platform_hybrid/experiments/modal/modal_samestack_gsm8k_cot.py`: 15 runs, one A10G each, about 14 minutes of training per run. Per-run results, including per-item pre- and post-training correctness and step logs, are in `platform_hybrid/experiments/results/`

samestack_gsm8k_cot_full.json; adapters are reported on a retained Modal result volume under the study adapter directory; current adapter-byte availability is not verified here. No W&B run was logged.

Table A.7: Same-stack rerun on the unsaturated configuration (§6.5.5).

Run identifier	Stack / platform	Model	Algo	G	Dataset	Seed	Steps	Outcome / status
samestack_gsm8k/grpo_g8_s{42,123,456,789,1024}	Modal A10G, local trainer	Qwen/ Qwen2.5-1.5B-Instruct	GRPO	8	GSM8K (test 200)	5 seeds	30	post 0.230–0.255, mean 0.245
samestack_gsm8k/grpo_g2_s{…}	Modal A10G, local trainer	Qwen/ Qwen2.5-1.5B-Instruct	GRPO	2	GSM8K (test 200)	5 seeds	30	post 0.230–0.280, mean 0.250
samestack_gsm8k/ppo_s{…}	Modal A10G, local trainer	Qwen/ Qwen2.5-1.5B-Instruct	PPO, value head	—	GSM8K (test 200)	5 seeds	30	post 0.160–0.215, mean 0.195

A.4 E1–E14 evaluation campaign lanes

The fourteen evaluation lanes are not training runs; they are evaluations of a single frozen actor, and they carry the registry's strictest receipt discipline. The actor is base Qwen/Qwen3.6-35B-A3B (commit 995ad96e…) with adapter campaign-adapter (commit withheld-adapter-revision…), bfloat16, trained on Tinker, run seed 809 taken from the adapter name. The reported actor configuration is 40 steps at G = 4 and learning rate 1×10^{-5}. Current source supplies a critic-free group-relative custom loss, but the historical executed loss, masking and KL path are not established without the missing dirty source binding. The historical configuration is attributed to the local W&B run directory for run [identifier withheld] and the run receipt withheld actor-training receipt (Chapter 8 §8.1.1). Those are properties of the single actor rather than of any lane, and every lane carries the same run seed (809), so algorithm, group size, seed and step columns are omitted from Table A.8. Terminal states are from the ledger of record, withheld historical campaign chronology; all scores are from outputs/E1_E14_FINAL_RESULTS_2026-09-19.md, except the six rows marked "finish 2026-09-27", which are from outputs/finish_pending_2026-09-27/<lane>/result.json.

E1–E14 campaign lanes.

Table A.8: E1-E14 evaluation campaign lanes with their run identifiers, stacks and platforms, models, suites and outcomes. Outcomes are stored-evidence end-to-end harness scores, not replayed; their source artefacts are among those missing from the public checkout, so they are reported, not publicly verifiable from this package (§1.8).

Lane / run identifier	Stack / platform	Model / actor	Dataset / suite	Outcome / terminal state
E1 SWE-bench Pro	native harness, Tinker actor	Qwen3.6-35B-A3B + adapter	SWE-bench Pro	2/731 = 0.274% pass@1 (97.54% coverage, 713/731 native evals); originals retained
E1 replacement (finish 2026-09-27)	native swebench 5.0.2, Modal sandboxes	as above	SWE-bench Multilingual	1/190 resolved (57 graded); earlier waves 4/110 kept separate — `COMPLETE`
E2 FrontierSWE	native harness	as above	FrontierSWE	1/17 tasks; replay normalized 0.8628
E2 replacement (finish 2026-09-27)	native grader, GCP VM per capsule	as above	CORE-Bench hard	27/45 = 0.600 task accuracy — `COMPLETE`
E3 SDAB	—	as above	SDAB (private bundle)	no local or paid path — `CLOSED_EXTERNAL`
E4 BankerToolBench	Tinker→Modal bridge	as above	BankerToolBench	1/100 tasks, recovery 0.3115 — `CLOSED_PARTIAL`
E4 base-model rerun	Modal `/v1/responses`	base model, zero-init LoRA (0 training steps)	BankerToolBench	100/100 trials, mean reward 0.0; bridge stop-sequence defect is a plausible mechanism, with unresolved causal contribution (§8.5)
E5 APEX-Agents	native harness	as above	APEX-Agents	7/480 native-scored; prefix mean 0.050505
E5 replacement (finish 2026-09-27)	native tau2, Modal 65k actor	as above	Tau3 banking_knowledge	8/97 = 0.082 pass^1 (25 infra errors counted as failures) — `COMPLETE`
E6 WebArena (finish 2026-09-27)	native evaluator, GCP VM	as above	WebArena	90/812 = 0.111, lower bound; 108 ungraded (judge unavailable) — `COMPLETE`
E7 BinaryAudit	native harness	as above	BinaryAudit (private payload)	1/46 attempted, verifier reward 0.0, no grade — `CLOSED_EXTERNAL`
E8 LAB-Bench (public)	native harness	as above	LAB-Bench public, 8 categories	**1967/1967 COMPLETE**
E8 LifeSciBench (original)	—	as above	LifeSciBench private	`CLOSED_EXTERNAL`
E9 MLE-bench	Modal streaming arm	as above	MLE-bench	40/75 natively graded (53.33%); suite score null
E9 replacement (finish 2026-09-27)	OpenHands CodeActAgent, GCP VM	as above	ML-Dev-Bench	10/34 = 0.294 task success — `COMPLETE`
E10 AgentDojo (benign)	native harness	as above	AgentDojo benign utility	97/97 tasks completed, utility 88/97 = 0.907 — `COMPLETE`
E10 AgentHarm (original)	—	as above	AgentHarm private	`CLOSED_EXTERNAL`

Lane / run identifier	Stack / platform	Model / actor	Dataset / suite	Outcome / terminal state
E11 VerilogEval	native harness	as above	VerilogEval (both framings)	**312/312 evaluated; 129/312 pass@1 (41.35%)**; 67/156 completion + 62/156 spec-to-RTL
E12 AppBench	—	as above	AppBench deployment	`CLOSED_EXTERNAL`
E13 BALROG (finish 2026-09-27)	native BALROG evaluator, local	as above	BALROG	255/255 episodes; 26.1% progression — `COMPLETE`
E13 OpenReward (original)	—	as above	OpenReward held-out games	externally blocked, no closure record
E14 Omni-MATH	native scorer	as above	Omni-MATH	4426/4428 accepted (99.95%); native accepted-set accuracy 2271/4426 = 51.31%; all-disposition diagnostic 2271/4428 = 51.29% — `COMPLETE_TERMINAL_NOTE`
E14 FrontierMath (original)	—	as above	FrontierMath hosted	`CLOSED_EXTERNAL`

Two source documents disagree on two lanes, and both observations are retained rather than resolved into one, because the disagreement is itself evidence: the historical snapshot records E7 as "1/28 errored, no grade" against the terminal-state table's "1/46 attempted" — both real observations at different points in the lane's life. Likewise E11's canonical figure is 129/312 = 41.35%; a 129/311 sensitivity figure survives in non-canonical receipts and is not used as the headline.

A.5 Completeness limitations

The historical registry is an index of its retained snapshot and is incomplete as a scientific dataset. Many records lack model, dataset, algorithm, group size, steps or a usable outcome. Missing fields remain unknown; names and provider state are not used to infer them. The public version does not include the account-wide field-coverage table or private per-identity export.

Scientific metadata limitations.

Table A.9: Metadata limitations in the historical retained registry; private account-level field counts are omitted.

Required scientific field	Interpretation of missing data
Model and dataset	Do not infer identity from a display name or tokenizer family
Algorithm and group size	An unrecorded configuration remains unknown
Training steps	Provider state does not establish completed optimization
Outcome	A logged record without a metric is not a scored scientific result

Four further limits apply.

1. **Aggregate presentation.** The following historical subtotal contains 105 registry entries, including grouped runs, synthetic traces and evaluation-lane rows; it is not a count of independent training experiments: the 4 cross-framework runs of Table A.2, the 20 Modal campaign runs of A.3, the 12 sweep runs (in 4 rows) of A.4, the 46 opening runs (in 16 rows) of A.6, and the 23 E-lane rows of A.8 — plus the 18 claim rows of Table A.5, which index claims rather than runs. Other historical inventory entries are not published in this derivative.

2. **Non-runs inside the count.** Three entries are not training results: `verl-dryrun` and `openrlhf-dryrun` are seeded deterministic fallbacks, and the E4 base-model rerun performs zero training steps; to these add §A.3.1's P1 gradient probe, which takes no optimizer steps at all. They are counted in the registry's historical bookkeeping. The dry runs are not measurements; the E4 evaluation and gradient probe are observations with their own stated limits, not model-training runs.

3. **Identity conflicts.** Historical source-identity disagreements remain a limitation; private provider reconciliation and its counts are withheld.

4. **Snapshot scope.** Historical source inventories differ in scope. They are neither current live accounts nor counts of independent experiments, and this public package does not provide a complete inventory replay.

None of this changes a reported result, because every result in Chapters 6–8 is bound to named artefacts rather than to the registry as a whole. It does bound what the registry can be used for: it records reported source and identity links, exposes gaps in them, and

locates claims in an explicitly tiered subset with the P1–P8 empirical rows at Tier C or X and P11 at Tier C under the stated per-run step threshold. The four Tier X P1–P8 rows must not be cited as supporting evidence.

The run totals that appear in different chapters count different corpora. Table A.10 lists the scientific study corpora retained publicly.

Scientific study corpora. Each total is a different corpus, not a different count of the same one.

Table A.10: Run totals quoted in this report and the corpus each one counts.

Corpus	Count	What it is	Used in
P1 cross-scale roster	70+	Runs across seven RL libraries and five model families; 12 of them are the fitted anchors	Chapter 6 §6.2
P8 run manifest	75	The run manifest of `paper_P8_workshop.tex` (44 cells, 0.5B to ~1T total parameters)	Chapter 4 §4.1
P5 ZVF audit	368	The Stratum-B audit of `p5_stack.tex`, W&B project `zvf-audit` (350 runs with logged final metrics)	Chapter 7 §7.1
Mega-campaign cells	98	Sampling-only cells of `mega_20260704`	Chapter 7 §7.1
E1–E14 actor training	1	The 40-step `pavlov_portfolio` run of August 2026, after the ledger cut-off	Chapter 8 §8.1.1
Unsaturated same-stack rerun	15	Three arms × five seeds on Modal, 2 October 2026 (§A.3.2)	Chapter 6 §6.5.5

Appendix B

Reproducibility and Provenance

B.1 What this appendix establishes

This appendix records three things that should not be confused with one another. The first is what the source repository prescribes for a rerun: a declared container and dependency set, a headline training command, and acceptance tolerances. These historical research-environment declarations are distinct from the small offline ESA companion tested during submission preparation. These instructions do not guarantee that this public document package contains every dependency, checkpoint or source payload. The second is what the repository verifies about itself without re-running any model: an audit suite driven by a single entry point, and a deterministic ledger check that recomputes the reported arithmetic directly from surviving evidence files. The third is provenance: which parts of this work were produced by the Semester 3 group, which by the individual contribution reported here, and what was lost along the way.

B.2 The declared historical research runtime

The container definition is `Dockerfile`, built from `nvidia/cuda:12.4.1-cudnn-devel-ubuntu22.04`. It installs Python 3.12 through the deadsnakes archive rather than the distribution default, with the in-file comment that Python 3.12 "matches the frozen runtime validated 106/106". It sets `PYTHONHASHSEED=42` and a fixed `LANG`/`LC_ALL` of `C.UTF-8`; stamps the build commit into an OCI `org.opencontainers.image.revision` label and a `.build_info` file; fixes `SEED=42`, `WANDB_MODE=offline`, `HF_HUB_DISABLE_TELEMETRY=1` and `OMP_NUM_THREADS=8`; self-checks by importing the core stack at build time; and runs under `tini`.

The historical dependency declaration is `requirements.txt`, which mixes exact pins,

bounded ranges and framework-client dependencies rather than fully locking every transitive package. It is headed as "pinned to the frozen E1 runtime lock … validated 106/106 on this stack". Its exact pins include `torch==2.7.1`, `numpy==2.2.6`, `transformers==5.5.4`, `trl==1.2.0`, `datasets==4.8.4`, `accelerate==1.13.0`, `peft==0.19.1`, `huggingface-hub==1.11.0` and `wandb==0.21.0`, with bounded ranges for scipy, safetensors, tokenizers, rliable, math-verify, latex2sympy2-extended and pytest, alongside the framework clients `tinker`, `tinker-cookbook` and `atroposlib`.

The 106/106 figure is the recorded outcome of the frozen-runtime validation, which `execution-notes.md` states as passing the complete pinned pilot/preregistration suite on Python 3.12.13 with the pinned versions listed above, and the focused amendment, protocol, launcher and verifier suite passing 55/55. The same record binds five artefacts by SHA-256 — protocol document, screening manifest, launch manifest, launch fingerprint and source binding — and states that a mismatch in package, Python, A100, FLOP, token or gradient conditions fails closed rather than proceeding.

B.3 The reviewer's entry point

For this ESA derivative, begin with the outer package's `START_HERE.md` and verify its file manifest using `python3 verify_package.py`. The isolated CPU companion and its environment-specific commands are under `implementation/`; it was prepared from the inspected `643f8f0` baseline plus the two documented companion fixes. Its 159 tests and recorded-artifact demo do not retrain a model or reproduce the campaign. The separate source-only Colab check establishes compatibility in its recorded environment, not identical dependency pins. The thesis's historical repository instructions below describe the inspected baseline, not a claim that all later GitHub revisions behave identically.

`REPRODUCE.md` is the historical repository's reviewer-facing document. Its fastest path is the structural smoke test at `platform_modal/scripts/smoke_test.sh`, which runs in about two minutes without a Tinker key and about eight when a live key is supplied so that the wire protocol is exercised; the keyless path needs no GPU and no account, and is offline only once the GSM8K dataset is cached, because one step loads it.

The headline result is GRPO on Qwen3-8B over GSM8K for 30 steps at LoRA rank 32, group size 8 and seed 42, recorded as a peak per-step training accuracy (the binary reward) of 62.5 % with a last-10 average of 34.4 %; these summarise the training curve of the seed-42 run, not a held-out evaluation, and Table 1.1 lists them beside the other Qwen3-8B GSM8K figures they are sometimes confused with. Reviewer-side reruns are accepted within ±5 percentage points on the last-10 figure and ±10 points on peak,

justified in the same document by the residual non-determinism discussed in §B.10. Per-seed reference values and W&B run identifiers are tabulated for seeds 42, 123, 456 and 789, with seed 1024 marked as a reviewer-only rerun; the canonical multi-seed set is `{42, 123, 456, 789, 1024, 2048, 4096, 8192, 16384, 32768}`. The group-size ablation is expected to reproduce a peak of 50.0 % at G=2, 75.0 % at G=4, 100 % at G=8 and 71.9 % at G=16, with last-10 values of 37.5 %, 52.1 %, 84.4 % and 38.0 %. In the inspected `643f8f0` baseline, five-seed aggregation runs through `utils/stats.py`, which accepts `--bootstrap-samples` (default 10,000) and prints the mean, standard error and a percentile-bootstrap 95% interval; its `--format` and `--rliable` flags are accepted but not yet acted on, and it reads a `results/<experiment>/seed_<N>/*.jsonl` layout that the trainer does not write, so a reviewer must write one metrics file per seed first, as `REPRODUCE.md` §3.4 states. `utils/verify_results.py` checks a rerun against `platform_hybrid/paper/expected_results.json` at those tolerances. It parses the per-seed `avg_last10` / `peak_reward` block that `grpo_cli` actually prints, and it exits non-zero when a value is outside tolerance or missing, when no result file matches an expected experiment, or (exit 2) when the expectations file or results directory is missing. Before the 3 October fix it parsed a line format the trainer never prints and exited 0 when nothing matched, so a failed rerun would have been reported as a pass; `tests/test_verify_results.py` now covers both formats and the failure cases. One limitation remains: every seed is checked against the single seed-42 headline (0.344 / 0.625), so a seed whose recorded values differ by more than the tolerance, such as seed 456 with a 100% peak, is reported as outside tolerance.

The cost is stated plainly: about five GPU-hours on a single A100-80GB for the headline run, against roughly 446 GPU-hours for a full paper reproduction. Dataset provenance is tabulated with pinned revisions — GSM8K at `740312a` with 7,473 training and 1,319 test rows, plus MATH-500, HumanEval, ArenaHard Auto, NoRobots and OpenThoughts3 each at a named snapshot — with exact shas in `ARTIFACT.md` §3.4.

B.4 Where the documentation has drifted from the code

Four discrepancies existed between the repository's prose and its live tree; `REPRODUCE.md` was corrected on 3 October 2026 and `ARTIFACT.md` was not. The training driver has moved to `platform_tinker/grpo_gsm8k_base.py`. `REPRODUCE.md` now invokes it at that path, while `ARTIFACT.md` still invokes `grpo_gsm8k_base.py` at the repository root; the flags are unchanged, because the CLI in `platform_tinker/tinkerrl/grpo_cli.py` carries a compatibility entry point, `legacy_main`, that translates the documented flag spellings onto the current ones. The same correction pointed `REPRODUCE.md`'s Modal, figure and Atropos commands at their live paths (p

latform_modal/scripts/modal_run_experiments.py, platform_modal/scripts/make_paper_figures.py, platform_tinker/atropos), removed an Atropos --seed flag the launcher does not accept, replaced the expected-output blocks with the format the trainer prints, and added a verify step to the quick start. Every documented command file now exists and the Python entry points answer --help; the Atropos scripts need tenacity, latex2sympy2_extended and atroposlib, which requirements.txt installs in the Docker image but the local development environment lacks. The analysis scripts platform_modal/scripts/p5p8/p5_headline_cis_full.py and platform_modal/scripts/length_bias_iter24.py previously resolved their repository root and results directory incorrectly and created directories on import; both now resolve paths from the repository root, and their regenerated outputs are the source of the corrected §6.5.3 and §7.1 values. ARTIFACT.md names the smoke test at scripts/smoke_test.sh rather than at platform_modal/scripts/smoke_test.sh, though REPRODUCE.md gives the correct path. The pins quoted in prose are stale: REPRODUCE.md §9 states that requirements.txt pins transformers>=4.56.2,<4.60.0 and a datasets<3.2 bound, whereas the live file pins transformers==5.5.4 and datasets==4.8.4, and ARTIFACT.md §3.3 quotes a third, older set; similarly, ARTIFACT.md describes the environment as Python 3.10 from the Ubuntu 22.04 archive, whereas the Dockerfile installs Python 3.12 via deadsnakes and the frozen-runtime record validates on Python 3.12.13. The ARTIFACT.md items are explained by that document's frozen status — it records a Semester 3 artefact at commit 9019b5c946f17ffe4761b5f4eac13b86d1e51cc0, dated 19 April 2026 — but REPRODUCE.md §9 is live guidance, not a frozen record, and carries the same defect.

B.5 The audit apparatus

The integrity suite is driven by a single entry point, platform_local/run_all_audits.py, which imports a shared result interface from utils/audit_utils.py and registers its audits as a tuple of name-and-function pairs. As it stands in this tree, that tuple contains **nine** audits: claim_issues, sync_issues, anon_issues, strength_issues, package_issues, workflow_issues, export_guard_issues, caveat_issues and scientific_issues. Each is implemented by a corresponding platform_local/ module carrying a __main__ block, so each can also run on its own; tests/test_audit_runner.py asserts that the registered modules and the platform_local/*_audit.py files are the same set.

Some repository documents give different counts, and the difference is historical. At the blind-review sweep the suite was thirteen audits, registered as a list of script filenames at the repository root and executed as subprocesses; the committed log of that run records

METRIC audits_total=13 with ten passing and three failing, and the same sweep states that all seventeen *_audit.py scripts then at the root were executed, with the suite covering thirteen of them. The registry now holds nine audits, all passing: a pruning commit removed obsolete audits, and a later restructuring replaced the subprocess runner with the in-process interface, so the seventeen-script description has narrowed by the same route. No script now prints a metric line directly; the line is constructed in one place, AuditResult.metric_line() in utils/audit_utils.py, and emitted by the nine audit modules plus the runner. A repository-wide scan finds several dozen files matching *_audit.py, but that population is not a suite: it includes unrelated analyses, test modules and a third-party file in the virtual environment.

The output contract is uniform. AuditResult.metric_line() emits METRIC <name>=<issue_count>, so every audit reports one machine-readable line whose right-hand side is the number of issues it found, and an audit passes exactly when that count is zero. render_suite prints each audit's metric line and issue codes, then three suite-level lines — METRIC suite_issues, METRIC audits_total and METRIC audits_passing — before either listing the failing audits by name or stating that all audits are passing. The entry point exits 0 when the suite passes and 1 otherwise, which makes it usable as a gate; the packaging step runs the suite before exporting and refuses to package if it fails. The runner's own test asserts this rendering against a synthetic two-audit suite, checking for METRIC audits_total=2 and METRIC suite_issues=1.

B.6 The deterministic ledger check

Where the suite above audits the submission package's internal consistency, a second instrument audits the campaign's reported figures. outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json, under schema ledger-code-check-v1, records eleven checks of which eleven passed and none failed. They cover E1, E8 coverage, E9, E11 and E14 counts and hashes and the lost-source probes; they do not cover the E10 score, E8 accuracy, the E2, E4, E5 and E7 lanes or anything recorded after 19 September, and the E14 check confirmed the official scorer's 4,426-row denominator rather than the 4,428-row denominator this report uses. The saved check report records arithmetic, coverage-summary, hash and path-presence checks. The strength of each depends on the input inspected; a summary-level check must not be described as an independent audit of every underlying record.

Table B.1: The deterministic ledger check by class, listing each specific check and what it establishes.

Class of check	Specific checks	What it proves
Exact divisions	E1 `2/731`; E11 `129/312`; E11 `67+62=129`; E14 `442 6/4428` and accuracy `0.5 131043831902395` (which is 2271/4426, the scorer's judged-row denominator; the separate all-disposition diagnostic counts the 2 unjudged rows as failures, 2271/4428 = 0.5129); E9 `40 of 75`	That each reported ratio is the quotient of the two integers the report claims, and that a partition sums to its whole
Receipt presence	E8 eight categories summing to 1967 with every `evaluated == expected_total`; E9 graded-row counts; the strict-completion set	That the inspected coverage summaries agree with the named totals and completion labels; this check report alone does not establish a unique surviving grade for every claimed unit. The later bounded payload checks in §B.11 provide stronger E8 and E10 coverage evidence.
Sealed-artefact hash equality	E1 v6 sealed request and fixture receipt	That the sealed request and the validation receipt are byte-identical to the artefacts recorded at sealing time

Class of check	Specific checks	What it proves
Lost-source absence probes	Source availability check	That the four named paths were not present in the dated search environment; this does not establish universal absence, deletion or the identity of a later reconstruction.

The distinction matters under questioning. An exact division proves the arithmetic is not a rounding convenience or a transcription error; it cannot prove the underlying evidence is sound. A receipt-presence check proves coverage claims are backed by artefacts; it cannot prove those artefacts were produced correctly. A hash-equality check proves identity between two artefacts — here, between what was sealed and what was later validated — but does not prove correct execution or scientific validity. An absence probe establishes non-discovery within its dated search scope; it cannot establish universal absence or deletion. The four checks answer different questions rather than forming a single evidence ranking. Two instances show the classes in use. The historical E1 records describe matching request and validation bindings without establishing that execution occurred. Private request identifiers are withheld. The E9 records show 41 graded rows resolving to 40 unique competitions against a denominator of 75 in the streaming arm and exactly one valid grade in the merged-VLLM arm, which is the check that confirms the two serving arms were never pooled.

B.7 The receipt model

A receipt in this campaign is a durable JSON artefact binding an outcome to the inputs that produced it, and the binding carries the evidential weight rather than the file's existence. The clearest statement of the principle is the receipt-bundle auditor's docstring, which records that the campaign and the receipt builders are kept deliberately separate from the auditor, and that the auditor "never imports a provider SDK, contacts a service, launches a job, or treats `status/online/a` URL/ID alone as provenance". The auditor reconstructs contract coverage, receipt predicates, canonical hash rules, budget caps and cross-artefact bindings, carrying its expectations as constants rather than reading them from what it checks — suite counts of 12 training, 14 primary-evaluation and 26 total — so a receipt set that quietly loses a suite fails the audit rather than redefining it.

Receipts bind four dimensions of a run: protocol, runtime, source and event order. The

frozen-runtime record applies that discipline to the runtime dimension alone, binding five artefacts — protocol document, screening manifest, launch manifest, launch fingerprint and source binding — by SHA-256 and failing closed on any mismatch. The judgment layer for subjectively scored questions follows the same pattern: one durable receipt per judgment binds the state bytes, the question text and the raw answer, and battery execution is gated on a health check rather than the service's availability, so a degraded answer cannot be laundered into a valid one. Where a lane could not be scored, its terminal state is recorded in the ledger of record with a named reopen condition, so the absence of a result is itself receipted.

B.8 Evidence loss in the finish era

The historical record reports that four finish-era execution-source components are unavailable: an E1 recovery driver, restored E9 runtime dependencies, an E6 receipt validator and an E1 multilingual metadata driver. This limits end-to-end reproduction. Operational scratch-workspace names, executed request identifiers and private source paths are omitted from this public derivative.

The four lost execution-source paths do not themselves contain the score artefacts, but their loss limits end-to-end reproducibility. The surviving evidence supports three narrower observations. First, none of the four paths is the source of any reported score. The E1 and E9 replacement lanes were eventually run on 27 September with new thin runners rather than the lost code (§8.4). The loss still bears on E1: the source-context collector had to be re-implemented for that run and was checked byte-for-byte against the original on only three recorded tasks, which is one reason the 1/190 and 4/110 figures are not pooled. Second, the sealed requests, validation receipts, regression fixtures and the 10-of-10 targeted-test log from the lost E1 code all survive, so a faithful re-implementation is constrained by surviving fixtures rather than free to invent behaviour; that re-implementation has since landed under a tracked path and passes the lost suite's recorded regressions, four process-group and six cleanup. Third, the loss is confined to finish-era iteration code: the replacement-lane native runners survive in tracked locations, including a 515-line multilingual runner carrying no reference to the deleted tree. The policy adopted in response — that execution sources live in tracked repository paths and never in untracked scratch trees — is the durable outcome of the incident.

B.9 The Semester 3 and Semester 4 provenance boundary

The boundary between inherited and individual work is a git tag. `capstone-final-2026-04-25` resolves to commit `21a99ef766543a1ca86bfb ad188445d3596ea73c`, dated 23 April 2026, whose subject line records the final metric-separation rewrite that segregated training rewards, held-out capability and proxy diagnostics. Two hundred and fifty commits precede that tag. A reviewer can reproduce the state at the boundary by adding it as a worktree, `git worktree add ../tinker-rl-lab-sem3 capstone-final-2026-04-25`, which materialises the Semester 3 tree without disturbing the current checkout.

The Semester 3 group comprised six students — Arvind C R, Sandhya Jeyaraj, Madhu Kumara L, Mohammad Rafi, Dhruva N Murthy and Arumugam Chetty K — under guides Anwesh Reddy Paduri and Narayana Darapaneni. Their work is the multi-framework benchmark infrastructure and the initial GRPO baseline experiments. Semester 4 was carried out individually under Ramesh Prakash Guledgudd, and the declaration facing this report assigns to that contribution the research direction, the experimental expansion, the statistical analyses, the P1–P8 paper series and the E1–E14 campaign. The solo-authorship commit `282e6b4f0f158de11b3f5bb4656e2d871f6 8f5c0`, dated 7 July 2026, records that division at paper level. The provenance record states that 584 commits and 5,050 changed files separated the boundary from the tree as it then stood, and that the eight paper PDFs were compiled at commit `006e90a38e4d abe2d0b4778be01dc7b27f2d3462` on 9 July 2026, one recompiled the following day after a findings-ledger rename. Those counts carry an as-of date rather than describing the current tree, so a reviewer recomputing them will obtain a larger number.

One consequence of this history shapes the repository's structure: the implementation remains shared, with experiment drivers, result tables, figures, LaTeX sources and audit scripts referencing one another across the boundary, and the provenance record is explicit that this is why the code is not split into separate trees. What the boundary separates is authorship of the research contribution, not access to the machinery. Two reporting rules follow and are enforced throughout this report: original-contract and replacement-scope results are never pooled, with no cross-suite aggregate; the ledger check corroborates the named E9 arm separation and E11 component split, rather than verifying every use throughout the report; and no replacement benchmark's score is presented as the score of the benchmark it replaces, with every substitution named as such at its point of use.

B.10 Residual non-determinism and the limits of reproduction

Not everything here is reproducible in the strict sense, and the tolerances exist because of it. Three sources of residual non-determinism survive even with fixed seeds and deterministic cuDNN settings: remote LoRA training is not bit-deterministic across scheduler decisions, with runs replayed months apart drifting by two to four percentage points on GSM8K last-10, documented through three reruns of the same seed-123 configuration; some matmul operations on H100 and A100 hardware introduce non-determinism through CUDA and cuBLAS; and sampling at temperature 0.8 with top-p 0.95 executes in a remote virtual machine, so a fixed seed does not fix the sampled trajectory. The record states the consequence itself: run-to-run variance on this setup is of the same order as the effect reported in the paper's PPO-versus-GRPO comparison, which limits the historical saturated comparison. The newer unsaturated comparison (§6.5.5) is baseline-specific and test-sensitive, with paired-t p = 0.016 but exact sign-flip p = 0.0625; neither supports a general algorithm ranking.

Three limits remain. Lanes blocked on external access cannot be reproduced from this repository, because the blocking resource is not in it. The source record identifies runners for the six lanes completed on 27 September under `outputs/finish_pending_2026-09-27/`. A rerun requires access to those sources, cloud accounts, a served copy of the actor and the benchmark assets; the public document package alone does not supply that execution environment. E6 also requires an available judge, and CORE-Bench's answer keys are deliberately kept out of the repository. The evidence-loss paths cannot be reproduced in their original form, only re-implemented against surviving fixtures, and that distinction should be preserved in any future citation. And figures originating at the Semester 3 boundary describe the tree at that tag, so reproducing them requires the worktree checkout rather than the current HEAD.

B.11 Primary-artefact recovery and availability

The 2 October checkout audit correctly recorded five named primary paths as absent from that checkout. A bounded read-only search of the author's Mac on 3 October recovered all five originals in a separate live research checkout, plus an earlier pending-experiments snapshot. The files were ignored by the local `outputs/*` rule. Their absence from the frozen cloud checkout and inspected Git/archive corpus was therefore a scope boundary, not evidence of deletion. The frozen repository is unchanged; exact recovered copies are retained privately and are not included in this public derivative.

Table B.2: Recovered primary campaign files. Original-source preservation metadata is retained privately; the public package does not include the recovery export or raw operational chronology.

Recovered primary source	Verified file-level evidence and remaining limit
`agentdojo_native_receipt.json`	2,228 bytes; 97 completed benign episodes, 88 utility passes; native v1.2.2, security evaluation false, no held-out claim
`labbench_final_diagnostics.json`	3,317 bytes; 1,967 evaluated, 450 correct, 1,517 incorrect; all eight category totals and diagnostics retained
`training_identity_verified.json`	815 bytes; run `withheld-id`, recorded dataset and file hashes; identity/configuration verification, not content decontamination
`finish/Pending_Experiments.md`	14,027 bytes; September 19 terminal ledger updated through September 21; historical readiness, not later execution proof
`finish/e14_terminal_note_2026-09-19.json`	1,564 bytes; records two truncated-judge exclusions and terminal closure; contains an internal denominator error discussed below

The additional September 12 `Pending_Experiments.md` is a distinct 1,535-byte snapshot, not a duplicate of the finish ledger. All six UTF-8 bodies total 23,486 bytes; independently recomputed byte lengths and SHA-256 values match the authenticated source export and the materialized copies. Source filesystem timestamps and existence come from the Mac export; no historical Git commit or pre-execution attestation is invented. These are recovered files, not newly generated experiment receipts.

Two source interpretation corrections follow. The E14 terminal note writes `2271/4428 = 0.5131043831902395`, but that decimal equals 2,271/4,426. The unchanged thesis keeps the official judged-row rate of 51.31% separate from the all-disposition rate of 51.29%; the original note is preserved with its inconsistency. The finish ledger explicitly says the E4 rerun had not launched by its September 21 update, so it cannot substantiate

the later detailed zero-reward rerun account. That account retains its separate source and raw-payload limitations in Appendix D.

A separate read-only payload check on the Mac verified all 29 explicit reference records covering 27 distinct file paths. For E8, 1,979 declared archive members match their retained local copies, including 1,967 unique native-grade records; independent retallying of the exported per-task records gives 450 correct, 1,517 incorrect, 1,086 length finishes, 881 stop finishes, 1,960 sure and seven unsure responses, and zero parser-error flags. The 1,259 unparsed-answer total remains supported by the recovered diagnostic rather than re-counted from the compact grade export. For E10, all 525 declared archive-member bindings match and the selected 97 distinct native traces each match their receipt hash; the exported trace records independently sum to 88 utility passes and zero handled errors. Historical partial traces are not pooled into that selection.

The Mac also inspected the retained E14 disposition and judge files, reporting 4,428 distinct dispositions, 4,426 accepted and 2,271 correct. The two excluded rows, 1195 and 2044, have recorded skip reasons and no Equivalence Judgement heading in the retained judge text. The compact export carries those counts, the two exclusion records and source hashes; it does not include all judge text or establish independent mathematical correctness. The source-native score distinguishes the 4,426 judged denominator from the 4,428-disposition diagnostic, resolving the terminal note's arithmetic conflict without changing its bytes. No scorer, judge or model was rerun. A subsequent read-only check also located the original configuration, metadata and output log locally: all three byte hashes match the recovered training-identity record. These originals remain withheld from this package. The redacted `validation_evidence/TRAINING_RECOVERY_REFRESH.json` records this availability check and the hash binding of thirteen retained source-envelope artifacts. It does not reconstruct the dirty execution source or the exact consumed training rows. The existing source-envelope text-overlap audit has the bounded scope described in §4.5; no overlap analysis, model or scorer was rerun for this refresh.

Recovery closes the five named file-availability gaps and the bounded stored-grade/hash checks support the indicated counts. These checks do not reproduce model execution, regrade answers or establish decontamination. The original checkout audit remains a dated record in `campaign_evidence_availability.json`; the new source export is `withheld primary-source recovery record`, the companion `withheld original-source preservation record` binds every recovered copy, and `withheld stored-payload validation record` records the bounded payload checks. The separately lost execution-source incident in §B.8 remains unresolved by this recovery.

B.12 Fresh-Sampling Diagnostic: Frozen Contract and Audit

The new evidence in §7.4 is run `V2 frozen-policy sampling study`, a sampling-only experiment with no weight updates. Its protocol, code, tests, expected cohort and parser were hash-bound before allocation or generation at 18:15:03 UTC on 2 October 2026. The freeze covers 26 files. Prompt ordering was deterministic and independent of scores, using seed 20261002; the V2 smoke and main cohorts are disjoint from each other and from the failed V1 smoke, and the request-seed namespace is disjoint from V1. The main cohort is 512 prompts and the independent smoke is 32 prompts, each with eight initial plus 24 fresh draws.

Model and decoding. Model and tokenizer are `Qwen/Qwen3-8B`, both at revision `b968826d9c46dd6066d109eabc6255188de91218`. The dataset is `openai/gsm8k`, configuration `main`, **train** split, revision `740312add88f781978c0658806c59bc2815b9866` (7,473 rows). The model used BF16 with thinking disabled, temperature 0.7, top-p 0.8, top-k 20, min-p 0, a 1,024-generated-token cap and 4,096-token context. Each request had n = 1 and its own seed; batching grouped four prompts. The recorded stack used vLLM 0.11.0, PyTorch 2.8.0, Transformers 4.57.1, eager execution and disabled prefix caching on one NVIDIA A100-SXM4-80GB. The supervised process completed in approximately 26.6 minutes, including loading and both cohorts. Hardware/kernel changes need not reproduce samples bit-for-bit.

Parser and review contract. The V2 parser accepts specified explicit final-answer forms, normalises exact rational numbers and fails closed on malformed, conflicting or invalid claims; it does not search arbitrary prose for a number. Gold parsing passed offline on all 7,473 training rows before generation. This is a stricter contract than the existing GSM8K test evaluator and must not be retrospectively substituted for it. Automated validation checked the frozen source and manifest bindings, cohort identity, completeness, ordered draw indices, unique seeds, reward recomputation and quality counts. A separate set-based computation reproduced 461 eligible groups and 33 events. The audit covered the first reward-changing response plus all eight initial responses for every event. Two assistant reviewers handled disjoint event partitions; this does not mean that each event received two independent reviews. The coordinator's additional arithmetic checks covered both recoveries and the ambiguous bread-rise case. The implementation field `manual_review_complete` records completion of this assistant review, not human validation; residual model-review error is possible.

Descriptive checks, not controller validation. Among the original 461 homogeneous groups, the combined-16 prefix became mixed for 15 (3.25%); the fresh-16-only com-

parison was mixed for 24 (5.21%). The all-32-parseable-and-uncapped subgroup was 12/439, selected on later outcomes and therefore not an unbiased replacement primary. Fixed Beta(1,1) and Beta(1/2,1/2) posterior-predictive assumptions assigned rescue probabilities of 72.73% and 49.41%, respectively, versus observed strict-reward mixedness of 7.16%. Their descriptive Brier scores were 0.4964 and 0.2450, against 0.0716 for plug-in zero. These uncalibrated fixed-prior assumptions substantially overpredict this endpoint; the exercise does not fit or validate a controller and does not vindicate certainty of zero rescue. The post-hoc later-change check in the 20 parser-first groups is exploratory and remains separate from the predeclared first-event numeric subset.

Receipt locations and hash boundary. Raw ordered completions are in the run directory's `study.jsonl` and `smoke.jsonl`; the per-prompt analysis is `analysis_final/per_prompt.csv`. The final summary, validation and completed audit preserve the unchanged raw primary endpoint alongside the conservative numeric subset. The main `study.jsonl` has SHA-256 `859ee12d9c146a3e9db65882b0a305d123bd385c573fa6ac4692b25220ac422f`. The summary and validation list the freeze, manifest and source hashes, distinguishing the manifest's canonical-content binding from its file-byte checksum. Hashes bind the receipts to the trusted pre-execution freeze; they are not cryptographic attestation of GPU execution. Token counts and identities were cross-checked, not independently decoded. The failed V1 smoke is retained as engineering evidence and is never pooled with V2. These new sampling receipts are separate from the original historical files subsequently recovered in §B.11.

B.13 C1 scientific source availability

The C1 analysis preserves the frozen 11/64 endpoint, the separate three conservative numerical witnesses, all sixty-four case classifications and all eleven event records. The included case ledgers and public scientific reference bindings retain disagreements and hash-level scientific source descriptions. This public derivative excludes runtime allocation, session, deletion and raw-transfer records, account resource limits and operational provenance. No live runtime or GPU execution is attested by publication of this document.

The historical thesis and evidence archives remain unchanged outside this public package. The public derivative has its own editable Markdown, LaTeX, builder and selected scientific ledgers. Appendix G is the complete scientific case index; Appendix I and the public availability manifest explain omitted source categories.

Appendix C

Notation, Symbols and Abbreviations

C.1 Scope and convention

This appendix records the symbols and abbreviations used across this report and the papers behind it, as the sources actually use them rather than as a house style would prefer. Where a symbol carries more than one meaning across documents, both are listed and the collision flagged, because a reader carrying one definition into another chapter will misread a figure.

C.2 Symbols

Table C.1: Notation: symbols used in this report, their meaning, and any divergence in how the underlying sources use them. GU is a reward-contrast availability proxy, not a measured gradient norm or a guarantee of a nonzero total update.

Symbol	Meaning	As used in the sources
G	Group size: completions sampled per prompt	Headline runs $G = 8$; sweeps $G \in \{2, 4, 8, 16\}$
K	Rollouts per group in the ZVF formalisation; **separately**, successes within a group	Elsewhere $K = \sum_i R_i \sim \text{Binomial}(G, p)$
$B_t, \mathcal{P}_t$	Batch at optimizer step t; prompts at step t	Competing denominators of ZVF

Symbol	Meaning	As used in the sources
p, $\hat{p}$	Latent success probability; sample rate K/G	Bernoulli(p) model; $\hat{p}$ centres the advantage
r_i, R_i	Scalar reward of completion i; binary reward	Verifiable reward; derivations appendix
$h_G(p)$	$p^G + (1-p)^G$	Bernoulli null for ZVF
ZVF_t, GU_t	Thresholded Zero-Variance Fraction; Gradient Utilization $1 - \mathrm{ZVF}_t$	Sample variance $\leq 10^{-6}$; ZVF_0 explicitly denotes exact ties (§4.3)
A_i	Advantage of completion i	Unnormalised $R_i - \hat{p}$; normalised $(r_i - \mu_g)/(\sigma_g + \varepsilon)$; Dr.GRPO omits standard-deviation division. Clipping belongs to the objective, not the advantage definition
μ_g, σ_g	Group mean and standard deviation of reward	$\mu_g = \frac{1}{G}\sum_j r_j$; population form $(1/G)$ in the inspected scaling paths; methods omitting standard-deviation scaling and unverified managed settings remain separate (§4.2)
π_θ, $\pi_{\theta_{\text{old}}}$, π_{ref}	Trained, sampling and frozen reference policy; per-token importance ratio $\rho_{i,t}$	Ratio against the sampling policy; KL penalty against the reference

Symbol	Meaning	As used in the sources
$\mathcal{L}(\theta)$	Policy loss	Original GRPO: clipped surrogate plus KL penalty. Inspected custom-loss Tinker loops use REINFORCE with a group-mean baseline; KL/reference status is row-specific, with TRL defaults/config evidence and managed unknowns retained (Table 4.2)
β	KL coefficient; **separately**, a regression slope	Source- and configuration-specific KL settings in Table 4.2; not universal framework defaults. Also a slope in M1/M2
ε	Four distinct roles — see §C.3	Clip range; ZVF tolerance; Adam term; advantage-denominator guard
γ, λ, T	Discount factor; GAE parameter; sampling temperature	Illustrative or historical settings include 0.99, 0.95 and 0.8, respectively; the actual run configuration governs
SI, PTD	Stability index; peak-to-tail drift	Reported in place of direct KL
PCD	Pairwise-contrast density	Under conditionally independent Bernoulli draws at fixed p: $\mathbb{E}[\hat{p}(1-\hat{p})] = \frac{G-1}{G}\,p(1-p)$; both sides are symmetric under p ↔ 1−p
pass@1	Pass rate under the suite's native scorer	E11 $129/312 = 41.35\,\%$; E1 $2/731 = 0.274\,\%$

Symbol	Meaning	As used in the sources
r, ρ	Pearson correlation and Spearman rank correlation	Distinct from reward, LoRA rank and importance ratios; historical pooled coefficients have the interpretation limits in §6.3 and Appendix E

C.3 Notation collisions and conventions

The symbol ε carries four distinct roles; their values must be read in context. In the hyperparameter mapping it is the PPO/GRPO clip range, default 0.2, swept over $\{0.05, 0.1, 0.2, 0.3, 0.5\}$. In the ZVF definition it is a numerical tolerance, 10^{-6}, deciding whether a group's sample variance counts as degenerate. In the optimiser configuration it is the Adam epsilon, 10^{-8}. It also appears additively in the advantage denominator, $\sigma_g + \varepsilon$.

K is used two ways: in the formal treatment of ZVF it denotes the rollouts in a group, a synonym for the group size elsewhere called G, whereas in the derivations appendix G is the group size and K is the number of successes — a design parameter in the one case, an outcome in the other. The letter r is similarly the reward, the LoRA rank (swept over $\{4, 8, 16, 32, 64\}$) and the Pearson correlation.

Throughout this report, ZVF means Zero-Variance Fraction: the fraction of groups meeting the declared reward-variance threshold. Exact ties and thresholded near-ties are distinguished in §4.3.

C.4 Abbreviations

Table C.2: Abbreviations and their expansions, with names that no source expands recorded as identities rather than glossed.

Abbreviation	Expansion or identity
GRPO	Group Relative Policy Optimization — critic-free, group-relative

Abbreviation	Expansion or identity
PPO	Proximal Policy Optimization
DPO	Direct Preference Optimization
RLHF	Reinforcement learning from human feedback
IS Loss	Importance-sampling loss, the distillation objective
SFT	Supervised fine-tuning
LoRA	Low-rank adaptation of large language models
KL	Kullback–Leibler divergence
CoT	Chain-of-thought; spelled out in prose, written "GSM8K CoT" for the variant
ZVF, GU	Zero-Variance Fraction; Gradient Utilization
PCD, SI, PTD	Pairwise-contrast density; stability index; peak-to-tail drift
Dr.GRPO	GRPO with the per-response length normalisation and the division by the group standard deviation removed
GAE	Generalised advantage estimation; λ is a configured parameter
MoE	Mixture-of-experts
BF16	bfloat16, the serving precision for the LAB-Bench, AgentDojo and Omni-MATH lanes
IQM	Interquartile mean, reported via `rliable`
CI	Confidence interval; confidence level, method, unit and resample count are specified per analysis
BH, FDR	Benjamini–Hochberg procedure; false discovery rate. The declared test family matters (§6.5.3)
NLL	Negative log-likelihood; auxiliary supervision is distinct from the reward-contrast term

Abbreviation	Expansion or identity
C1	The fixed-policy benchmark diagnostic in Chapter 7; its events do not measure training gain
W&B	Weights & Biases, the experiment-tracking service
MLE-bench	The suite forming lane E9's original contract; MLE never appears standalone
MATH-500	The mathematics evaluation suite
GSM8K	The grade-school arithmetic suite; 7,473 training and 1,319 test rows
HumanEval	The code-generation suite used for the code arm
ArenaHard, NoRobots, OpenThoughts3	Dataset names used as-is, each at a pinned revision
MiniWoB	Browser micro-task suite used for the proxy smoke test
SWE-bench (Pro, Multilingual)	The repository-repair suite forming lane E1
LAB-Bench, AgentDojo, VerilogEval, Omni-MATH, BALROG, WebArena, APEX-Agents, CORE-Bench, Tau3, MLDevBench, SDAB, BankerToolBench, BinaryAudit, LifeSciBench, AgentHarm, WebBench, AppBench, OpenReward Games, FrontierSWE, FrontierMath	Suite names used as names, with no expansion in any source; see §C.5
Tinker	The remote training and sampling API used to train the adapter
TRL	HuggingFace's LLM post-training library, in both framework rosters
SkyRL, verl (veRL), OpenRLHF, Atropos	Launchers in the cross-launcher roster; only Tinker and TRL produced completed runs, the veRL and OpenRLHF entries being dry-run placeholders

C.5 The E1–E14 lane identifiers, scopes and statuses

Each lane's short code names one original benchmark contract and is not a rank or a score. Receipt paths in Table C.3 are historical identifiers, not guarantees that every referenced payload is present in the frozen checkout. The six originals covering five previously missing basenames are now preserved in the withheld source archive; Appendix B §B.11 maps their historical paths and hashes and records supplementary stored-payload checks. The three original training-log files were subsequently located and hash-matched locally (§B.11), but the dirty execution source, exact consumed training rows and E4 raw rerun evidence remain unresolved. Several lanes hold two states at once — an original contract and a replacement scope — so the code alone does not say which scope a figure comes from. Table C.3 is the single record of lane scope, headline figure, terminal state and receipt; the chapters point here rather than restating it. "orig" is the original contract and "repl" a declared replacement scope. Terminal states are from the recovered `withheld historical campaign chronology`, whose latest annotations run through 21 September; the E1, E2, E5, E6, E9 and E13 replacement scopes were completed on 2026-09-27, after that ledger, so their states are assigned in this report from each lane's `result.json` (§8.4); the result files themselves carry no state field. Receipt paths are relative to `outputs/`.

Table C.3: The E1–E14 lanes: original contract, replacement scope, headline figure, terminal state and receipt. Every actor-dependent figure is a stored-evidence end-to-end harness score, not replayed and not a capability measure; several are reported, not publicly verifiable from this package (§1.8). E14 retains native accepted-set accuracy 51.31% over 4,426 judged rows and the separate all-disposition diagnostic 51.29% over 4,428 dispositions; the recovered terminal note's mixed denominator label is corrected in Table E.1. The recovered E4 pending-state ledger predates its later reported 100-trial rerun (§8.5).

Lane	Original contract	Replacement scope	Headline figure (scope)	Terminal state	Receipt
E1	SWE-bench Pro	SWE-bench Multilingual	2/731 = 0.274% pass@1 (orig, full suite; end-to-end harness score, 593/713 patches corrupt for `git apply`); 1/190 resolved in the completion wave (16 recovery and 174 previously unreached tasks), 4/110 earlier, not pooled (repl)	orig: complete, no ledger label; repl: `COMPLETE` on coverage (all 300 attempted, two contracts)	`modal_e1_e14/2026-08-16/e1_swe_bench_pro_full/seed1818/receipt.json`; `finish_pending_2026-09-27/E1/result.json`

Lane	Original contract	Replacement scope	Headline figure (scope)	Terminal state	Receipt
E2	FrontierSWE	CORE-Bench	1/17 tasks, replay 0.8628 (orig, partial); 27/45 = 0.600 task accuracy (repl, complete)	orig: partial; repl: COMPLETE	e2_frontier_swe/e2_terminal_attempt_receipt_2026-08-22.json; finish_pending_2026-09-27/E2/result.json
E3	SDAB (private bundle)	—	none	CLOSED_EXTERNAL	withheld operational closure record
E4	BankerToolBench	—	1/100 tasks, recovery metric 0.3115 (orig, partial)	CLOSED_PARTIAL	modal_e1_e14/2026-08-16/e4_recovery_pass16_receipt.json
E5	APEX-Agents	Tau3	7/480 natively scored (orig, partial); 8/97 = 0.082 pass^1 (repl, complete)	orig: partial; repl: COMPLETE	e5_apex_agents/e5_exact_sequential_prefix_aggregate_2026-08-22.json; finish_pending_2026-09-27/E5/result.json
E6	WebBench	WebArena	90/812 = 0.111 task success, lower bound; 108 judge-dependent tasks ungraded (repl, complete in coverage)	orig: no original-contract result (ledger N/A); repl: COMPLETE on coverage; 108 ungraded	finish_pending_2026-09-27/E6/result.json
E7	BinaryAudit (private payload)	—	1/46 attempted, verifier reward 0.0, no grade (orig)	CLOSED_EXTERNAL	e7_binaryaudit/2026-08-22_e7_paid_attempt_receipt.json
E8	LifeSciBench (private package)	LAB-Bench public split	450/1,967 = 0.2288 (repl, complete; end-to-end harness score)	repl: COMPLETE; orig: CLOSED_EXTERNAL	public_portfolio_2026-09-05/labbench_final_diagnostics.json (recovered); public_portfolio_2026-09-05/labbench_native_receipt.json (hash-checked on Mac)
E9	MLE-bench	MLDevBench	40/75 competitions graded, suite score null (orig, partial); 10/34 = 0.294 task success (repl, complete)	orig: partial; repl: COMPLETE	e9_mle_bench/modal_streaming/; finish_pending_2026-09-27/E9/result.json
E10	AgentHarm (private tasks)	AgentDojo benign utility	88/97 = 0.9072 utility, 97/97 completed (repl, complete; benign-utility harness score)	repl: COMPLETE; orig: CLOSED_EXTERNAL	public_portfolio_2026-09-05/agentdojo_native_receipt.json

Lane	Original contract	Replacement scope	Headline figure (scope)	Terminal state	Receipt
E11	VerilogEval	none (two native framings)	129/312 = 41.35% pass@1 (orig, complete; end-to-end harness score)	COMPLETE	modal_e1_e14/2026-08-16/e11_full_receipt.json
E12	AppBench (deployment)	—	none	CLOSED_EXTERNAL	withheld operational closure record
E13	OpenReward Games (held-out games)	BALROG	26.1% BALROG progression, 255/255 episodes (repl, complete)	repl: COMPLETE; orig: externally blocked, no closure record	finish_pending_2026-09-27/E13/result.json
E14	FrontierMath (hosted)	Omni-MATH	2,271/4,426 = 51.31% native accepted-set accuracy (end-to-end harness score; 2,982/4,428 responses at the 2,048-token cap); 2,271/4,428 = 51.29% all-disposition diagnostic (repl; §8.2)	repl: COMPLETE_TERMINAL_NOTE; orig: CLOSED_EXTERNAL	PES_Phase2_Review_2026-09-12/finish/e14_terminal_note_2026-09-19.json (recovered); public_portfolio_2026-09-05/native_finish_v5/e14_official_collector/official_result01/native_score.json (Mac validation)

The historical 19 September strict-completeness check names three scopes (E8 and E10 replacement scopes, E11 original contract); E14 has a separate terminal-complete note. The six replacement scopes attempted to completion on 27 September are additional later records, with the E1 contract split and E6 missing grades retained in the table. Six original contracts are CLOSED_EXTERNAL with written closure records (E3, E7, E8-original, E10-original, E12, E14-original). E13's original contract is also blocked on external access but carries no closure record, because the lane continues through its replacement scope. Original-contract full-coverage scores exist for E1 and E11.

Appendix D

Campaign Lane Detail

This appendix holds the lane-by-lane record behind Chapter 8: provenance of the training run, per-lane serving and scoping notes, the engineering history behind individual figures, the per-lane narratives of the six replacement scopes completed on 27 September 2026, the full E4 rerun audit, and the per-lane caveats of the small-scale reruns. The descriptive figures agree with Chapter 8, and the two reporting rules of Chapter 8 (no pooling of original-contract and replacement-scope results, no unsupported precision) apply throughout. The E11 uncertainty calculation below is a new, reproducible analysis of surviving paired verdicts. Six original files covering five previously missing basenames are now preserved in the withheld source archive (Appendix B §B.11). Receipt-level fields and the supplementary stored-payload checks are distinguished below from historical claims whose raw trajectories, dirty execution source or supporting artifacts remain unvalidated; recovery and count/hash checks are not new execution or regrading of the experiments.

D.1 Actor identity, inference conditions and scoping notes

The design consequence of evaluating one actor for seed variance is specific: every suite number reported in Chapter 8 comes from one actor, and where a lane sampled more than one completion per task it did so to satisfy the suite's own protocol, not to estimate variance.

Inference conditions were reported per lane rather than imposed globally, and the lanes differ widely. The recovered E10 native receipt declares a temperature of 0, a 32,768-token context, 4,096 output tokens per request, 3,600 seconds of wall time. It also declares `max_generation_requests` = 1,967, a ceiling on generation requests rather

than a task count: the lane has 97 episodes. The earlier report separately gives 414 native requests (405 in the main run and 9 in the continuation) and says the collector does not admit shorter native conditions. Those execution counts and collector claims are not fields of the recovered receipt, and the cited terminal-readiness source remains unrecovered. The E11 run was sampled at temperature 0.2, top-p 0.95, 1,024 maximum output tokens and seed 1816, one sample per problem across all 312 prompts. The point of recording them per lane is that the sampling regime is part of the result, not a detail beneath it.

Two scoping notes complete the picture of what the actor has actually been measured on. The E1 original-contract evaluation was a one-checkpoint evaluation whose 731 generations were produced by a mixed backend within a single run — 476 Tinker generations and 255 Modal vLLM generations — and that backend mix is recorded in the original receipt. Separately, two small probes exist at other parameter settings but are not suite results and are not reported as such: a base-model smoke run of the E11 harness measured zero scored tasks, and a four-task pilot on the step-40 checkpoint (the last training step, saved separately from `stepfinal`) returned four passes out of four with zero extraction failures while carrying an unresolved outstanding blocker — the decontamination receipt identifier for that pilot does not exist, and the split-manifest validator still fails on it.

D.2 Training-run provenance

The earlier report attributed the adapter configuration to the local Weights & Biases directory for run `withheld-id` (`withheld-training-log-directory`), the run receipt `withheld actor-training receipt`, and Hugging Face checkpoint branches. The original `outputs/public_portfolio_2026-09-05/training_identity_verified.json` is now recovered, with SHA-256 `e340d5fe41b7b028dd78ea9f01f6da787c7a8cb968f5a0ac1b103a92b546ee86`. It records run `withheld-id`, dataset revision `bd1f0db6056091e99d5e28e3a7b3d05d77b21876ad65e5b31bf6f1b470e73e5c`, the two training-suite IDs and hashes for `config.yaml`, `wandb-metadata.json` and `output.log`. It explicitly labels this `TRAINING_CONFIG_VERIFIED_NOT_CONTENT_DECONTAMINATION` and states that W&B captured the dirty checkout's base commit but did not upload the dirty source diff. The three underlying W&B files have since been located locally and their bytes match the three hashes in this identity record (§B.11). They are withheld from the public package, and this check does not establish availability of every referenced run receipt. The surviving E11 receipt verifies the evaluated base/adapter identity; neither it nor the recovered logs reconstructs the dirty execution tree or the exact consumed training rows. Table 8.1 retains detailed training fields as

earlier reported except where the recovered identity record directly corroborates them.

Four things remain unavailable or were never created, and they are listed so that no reader fills them in:

- **The exact training code.** The run records git commit `8fdade2f` with uncommitted changes that were never saved. The `pavlov_portfolio` preset and its dataset builder do not exist at that commit; they first appear in commit `72b9336d3` on 2026-08-14. The reward and data-pool code in Table 8.1 is therefore taken from the current tree, whose dataset hash does not match the recorded `bd1f0db6`…. It is the best reconstruction, not proof. The retained `8fdade2f` loss helper sums the supplied log probabilities and averages over completions. It is not identical to the current helper, which adds response masking, optional NLL and other checks. Neither committed version reconstructs the missing dirty execution tree.
- **Which 80 training prompts were drawn.** The draw used `random.Random(809)` over the 512-row pool, but the pool construction that ran is the unrecoverable code above.
- **The original sampler execution.** The public package does not include execution-specific operational access paths and cannot replay that original route.
- **Any held-out training-time evaluation.** None was run (`evaluate_heldout` false).

The run also departs from `zvf-program/flagship/PAVLOV_EXPERIMENT_PROTOCOL_2026-08-09.md`. The protocol plans a learning-rate search and a twelve-suite curriculum with 1,200/128 prompt and response tokens. This run used two suites, 40 steps, 1,536/384 tokens and a learning rate of 1×10^{-5}, and the protocol does not mention it; only the budget matches.

D.3 Serving conditions: format limits and the scope of the stop-sequence mechanism

Table 8.2 reports substantial extraction and length failures; E11's aggregate extraction count is verifiable in the surviving receipt and E8's aggregate diagnostics are now corroborated by its recovered original. The supplementary validation independently corroborates E8's stored grade and finish-reason counts, but the 1,259 parse-none count remains diagnostic-only. These checks do not validate every serving field, response body or cited finish-era source. The reported absence of role-token run-on in E1's single-turn Tinker generations does not establish a necessary condition for the mechanism. The E4 bridge code and recorded examples support a concrete failure mode, while the corrected

shim's nonzero outcome comes from one task against 100 bridge trials. Task selection, serving path and caps differ, so the fraction of the original aggregate zero caused by the defect remains unidentified. For other bridge-served lanes exposure is possible, not demonstrated. This matches the scope qualification in `outputs/e1_e14_small_scale_2026-09-26/E4/BRIDGE_STOP_TOKEN_FINDING.md`.

Three non-bridge failure attributions are corrected (Table E.1). E11's 150 extraction failures occur under a 1,024-token cap with thinking on, a plausible contributor whose effect is not isolated; E14's capped responses are correct at 34.5% against 85.9% for uncapped ones; and 593 of E1's 713 submitted patches are corrupt for `git apply`. Lane detail is in §D.4 and §D.5. The runners now record per-sample finish reasons and truncation (E11, E14) and repair and record patch-apply status (E1), but no stored score was regenerated.

D.4 Strictly complete scopes: lane detail

The ledger lists E11 both among its "replacement scopes" and among its original-contract results; Table 8.A lists it as original-public-subset. It is one run and one result, not two.

E8 — LAB-Bench, public split. The recovered `outputs/public_portfolio_2026-09-05/labbench_final_diagnostics.json` (SHA-256 `7d7d0bd47162534212f7526db548e1f5d42bbe16554bc2e29115f0d9cf5af941`) directly records the following per-category accuracy, correct counts and coverage: TableQA 0.7869 (192/244); FigQA 0.5138 (93/181); ProtocolQA 0.2500 (27/108); SuppQA 0.1829 (15/82); LitQA2 0.1759 (35/199); DbQA 0.1308 (68/520); SeqQA 0.0333 (20/600); and CloningScenarios 0 (0/33). No category is incomplete. Coverage per category is at or above 0.9878 everywhere, and the CloningScenarios coverage is exactly 1.0 with zero correct. The receipt also records zero parser errors, 1,960 responses marked "sure" against 7 marked "unsure", and a completion profile of 1,086 length-truncated finishes against 881 stop finishes. The diagnostic's correct and incorrect fields partition all 1,967 rows, so the headline is an end-to-end harness score over the full split. The earlier account treats the 1,259 unparsed responses as incorrect and supplies the conditional 450/708 sensitivity; that response-level membership has not been independently regraded. The diagnostic binds a native-receipt hash (`b08995d5…`) and a graded-responses hash (`8a61def9…`). The supplementary Mac validation locates the native receipt at the declared hash and checks 1,979 declared archive members against both archive and local bytes. Independently tallying its 1,967 exported grade records reproduces 450 correct, 1,517 incorrect, all category denominators and correct counts, 1,960 sure, 7 unsure, 1,086 length finishes,

881 stop finishes and zero parser errors. Those exported records have no parsed-answer field, so they do not independently establish the 1,259 parse-none count or its response-level membership. No native scorer was rerun.

E10 — AgentDojo, benign utility scope. The recovered native receipt (SHA-256 a40c90015200a389ce0767b14a78f9409330a0ae8615cb4822ef9b54656ebaa0) records missing_evaluation_ids empty and native_handled_error_count zero. It carries run-manifest hash 00e4228f4b757dc32b69b74f05a88348151f13185b470c5f00e31fdaa830ef30 and fixes the metric as benign_task_utility, benchmark version v1.2.2, attack and defence null, security_evaluation false and heldout_claim false. The earlier statement that all three protocol fields were null is corrected (Table E.1). There is no upstream benchmark commit field in the recovered receipt, so the earlier attribution of commit 089ed468cf3ed0322acc66b0211f26d9d90dbf60 to it is unsupported. The episode decomposition, banking 16, slack 21, travel 20 and workspace 40, is absent from the native receipt but is independently corroborated by the supplementary export's 97 selected trace records. Their utility/error fields tally to 88 passes and zero handled errors. All 97 evaluation IDs map uniquely to exact-hash archived traces, selecting 94 from the original collection and 3 from the explicit continuation; extra historical partial traces are not pooled. The Mac validation also reports all 525 archive-member pins matching. These are stored-trace checks, not re-execution of the native evaluator or independent semantic grading. Its decontamination block records TRAINING_INVENTORY_ABSENT; empty match lists without the training inventory do not establish absence of overlap.

The following collector history is retained from the earlier report. The supplementary validation locates the continuation terminal-evidence file on the Mac and matches its declared hash, and the exported 94-plus-3 trace mapping supports the completed-episode accounting. It does not reproduce the collector's 18 offline tests or export the full snapshot, readiness and continuation-result contents, so the detailed repair and test claims below remain historical. These sources are still absent from the frozen repository. An earlier attempt reportedly terminated with 94 of 97 episodes and score null, missing workspace tasks 37 through 39. The cause was a confirmed collector fault rather than a model failure: verified task receipts recorded absolute /cache/... trace paths, and the frozen summary recomputed those paths on the local host, so every completed receipt failed comparison after extraction. The repair was deliberately minimal — the original archive and every extracted receipt and trace byte are unchanged, and a narrowly scoped adapter rewrites only the freshly computed task_result.native_trace_path to the verified canonical remote path before the frozen summary compares it, leaving native task code, environment, prompt, result parsing, utility values and handled-error policy untouched. The revised collector passed 18 offline tests, independently re-run in 0.507

seconds, and the continuation run that closed episodes 37 through 39 was executed in the reported continuation with the native wrapper hash 11a8b61631390d9b20decd4263008e5a4c6f648a033d314384bac9e5d2456d77.

E11 — VerilogEval. The upstream NVlabs/verilog-eval harness ran at revision c498220d0a52248f8e3fdffe279075215bde2da6, using Icarus Verilog 12.0 at revision 4fd5291632232fbe1ba49b2c26bb6b2bf1c6c9cf and Verilator 5.050. Pass verdicts were determined deterministically: for each pinned problem the single sample01 sv-iv-test log was read and marked PASS only when it contained a full-line "Mismatches: 0 in samples" verdict, with missing or non-matching logs marked FAIL. The upstream sv-iv-analyze summariser could not be used because it fails on a missing optional langchain dependency; that failure is recorded in the receipt and does not affect the aggregation, which reads the simulator logs directly. An extraction failure writes an empty candidate file that always fails.

E11 design-cluster uncertainty. The verifier.receipts.code-complete-iccad2023.log_receipts and verifier.receipts.spec-to-rtl.log_receipts mappings in the surviving full receipt contain exactly the same 156 design IDs. Matching by ID gives 54 designs passing both framings, 81 failing both, 13 passing code-completion only and 8 passing specification-to-RTL only. The 312 prompt outcomes are therefore not 312 independent design observations. The descriptive pass fraction is unchanged at $(2 \times 54 + 13 + 8)/312 = 129/312$. For uncertainty over design composition, resample 156 whole design pairs uniformly with replacement per replicate, retain both observed outcomes, and calculate their summed passes divided by 312. With 200,000 replicates from Python random.Random(20261002), the 2.5th and 97.5th percentiles are 0.3429487 and 0.4871795, reported as [0.343, 0.487]. Quantiles use linear interpolation at index $(B - 1)p$. The standard-library script platform_hybrid/experiments/scripts/e11_design_cluster_bootstrap.py reproduces the calculation; the adjacent e11_design_cluster_bootstrap.json preserves method, seed, receipt SHA-256, pair counts and all 156 paired verdicts, and the script falls back to it when the ignored receipt is absent. Run it from the repository root with python platform_hybrid/experiments/scripts/e11_design_cluster_bootstrap.py. The exact upper bound depends on drawing with random.choices, because the 97.5th percentile falls on the boundary between 151/312 and 152/312; drawing with randrange under the same seed gives 0.4839744. The script previously cited under outputs/PES_Phase2_Third_Review_2026-09-24/analysis/ was never committed.

This interval assumes exchangeable underlying designs and conditions on one checkpoint, one generation per framing and the observed protocol. It does not estimate variation across training seeds, decoding seeds or protocols, and does not establish generalization beyond comparable designs. Conditional on the complete fixed benchmark and

these recorded outputs, 129/312 is simply the observed fraction. The parseable-only 129/162 remains descriptive: the receipt records 150 extraction failures only in aggregate, not per-design extraction indicators, so it cannot support a cluster-aware interval for that conditional rate.

E11 failure attribution. The receipt records 150 extraction failures, but their underlying causes cannot be apportioned from the retained aggregate fields (corrected; see Table E.1). `run_e11_full` in `zvf-program/flagship/modal_e1_e14.py` used `max_tokens` = 1,024 and did not pass `enable_thinking`, so the model's template default, thinking on, applied. No per-sample finish reason was recorded, but the receipt's 312,622 response tokens over 312 samples give a mean of about 1,002 of 1,024. This establishes near-cap average length, not the number of cap-hit generations. On the 50 items of the 26 September small-scale rerun, the receipt's verdicts give 23/50 and the same trained adapter, served by vLLM with thinking off, temperature 0 and a 4,096-token cap, scores 33/50 with no extraction failures and every response ending on a stop; the discordant pairs are 11 against 1 (exact McNemar p $\approx$ 0.006). Engine and temperature changed along with the budget, and 50 of 312 prompts is a subset, so 129/312 stays the canonical score and no budget-corrected score is reported. The extractor also stripped reasoning only when a closing `</think>` was present; for a response truncated inside its reasoning it graded any `module … endmodule` found in the draft, and only response hashes were kept, so it cannot be determined how many of the 162 extracted candidates or the 129 passes came from reasoning drafts. The runner now refuses extraction from an unterminated reasoning block, makes the thinking mode explicit and records response text, finish reason and truncation per sample; the stored result was produced before those changes. The earlier unclustered Wilson intervals on pooled and parseable-only outcomes are not used.

The E11 lane also carries the campaign's clearest example of a scoring decision taken for evidential rather than numerical reasons. The all-problems reference sweep — running the shipped reference implementation of every problem through both simulators — returned 311 of 312. One problem, `verilog_eval/spec-to-rtl/Prob099_m2014_q6c`, fails to elaborate against its own test bench under both simulators, with Icarus reporting that ports `Y2` and `Y4` are not ports of `good1`; this documents a reference/test-bench mismatch, without proving that every possible candidate fails. One item's maximum contribution to the fixed-denominator rate is 1/156 = 0.64 percentage points on the specification-to-RTL split, or 1/312 = 0.32 points overall. Separately, excluding the observed failing item changes the displayed aggregate rate by 129/311 − 129/312 = 0.13 percentage points; that exclusion effect is not a maximum bias bound. Excluding it yields 129/311 = 0.4148. That corrected figure is *not* canonical. The recorded amendment of 2026-08-22 states the reason plainly: no immutable benchmark-level jus-

tification was captured for the exclusion, so the raw 129/312 result is canonical and the 129/311 value is retained only as a noncanonical sensitivity; no samples and no verifier artifacts were changed by the amendment. The ledger's integrity check confirms that the component split sums correctly to the canonical total.

E14 — Omni-MATH replacement scope. The surviving consolidated ledger and `outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json` record 4,426/4,428 accepted rows and accuracy 0.5131043831902395, consistent with 2,271 passes among 4,426 judged rows. Counting the remaining two as failures gives 2,271/4,428 = 51.29 per cent. The recovered terminal note (SHA-256 `14b8308df159f9c86a3a58d724b8152a5f44f098c57a824637fcbe5ae6f3602a`) identifies `omni-01195-a6cbdc4ee3c8694b` and `omni-02044-612ddacaa39d91fe` as the two unaccepted rows and records that Omni-Judge outputs were truncated before an Equivalence Judgement section. It states that both had recorded skip reasons, that omission followed the native scorer, that no rejudge was performed and that the lane closed with all 4,428 dispositions. This now supports the terminal decision and explains the earlier parser-failure terminology at receipt level. The supplementary Mac-side validation now inspects the stored rows and exports the two exclusion records, each lacking the Equivalence Judgement heading and carrying the recorded omission reason; no mathematical answer was independently rejudged. The note's `score_impact` nevertheless writes `2271/4428 = 0.5131043831902395`; the decimal is instead 2,271/4,426. The recovered finish ledger repeats the inconsistent pairing of 2,271/4,428 with 51.31%. Both sources remain unchanged, and the thesis preserves the corrected distinction between 51.29% over all dispositions and 51.31% over judged rows (Table E.1). The supplementary export identifies the disposition and judged-row payloads and the scoring-recheck file on the Mac, with hashes. Its traversal records 4,428 valid rows in each of the disposition, judged-row and new-judge-response JSONL files, with 4,426 accepted, 2,271 correct and two skipped dispositions. The recorded native-score fields explicitly distinguish denominator 4,426 from the all-4,428 diagnostic. The full E14 rows are not exported here; the cloud check can independently verify the exported arithmetic and two exclusion records, but cannot independently recount all 4,428 rows from this export.

E14 generation budget. The actor cap was 2,048 tokens (`zvf-program/flagship/public_omni_math_native.py`), and 2,982 of 4,428 responses reached it. Recounting `native_dispositions.jsonl`, capped responses are correct in 1,029 of 2,982 (34.5%) and uncapped ones in 1,242 of 1,446 (85.9%) (corrected reading; see Table E.1). Difficulty confounds the split, because harder problems both run longer and fail more often, so it does not estimate what a larger budget would score. Both the 51.31% accepted-set score and the 51.29% all-disposition diagnostic remain conditional on that generation budget; this observational split does not identify the size of a budget effect. The judge's

300-token cap is what truncated the two unjudged reports. The runner did not record capped status; it now writes a per-task `cap_status.json` and an `accuracy_by_actor_cap` receipt field, without altering the stored grades.

D.5 Original-contract results: lane detail

E1 — SWE-bench Pro. The denominator is the complete 731-row test split of `ScaleAI/SWE-bench_Pro` at revision `7ab5114912baf22bb098818e604c02fe7ad2c11f`. Within that denominator the run produced 713 native evaluations, fourteen generation failures and four lost generation artifacts; those eighteen non-native outcomes are retained in the denominator rather than trimmed, so the figure is a rate over all 731 tasks and not over the subset that graded cleanly. Those 713 native evaluations are mostly not evaluations of an applied fix (corrected reading; see Table E.1). The prompt asked for unified diffs with concrete line ranges but showed source without line numbers and with elided regions, and the runner's diff validator checked syntax but not that hunk-header line counts match the hunk bodies. Parsing the stored `candidates.json` with `git apply --stat` rejects 593 of 713 patches as corrupt ("corrupt patch at line …"), and 133 carry a placeholder `index 1234567..abcdefg` line. The official entry script runs a plain `git apply -v` without `--recount` and without stopping on failure, so for those 593 instances the tests ran against the unpatched base. With `--recount`, 711 of 713 parse. Both resolved instances are among the 120 that parse as submitted. Apply status was not captured by the run, so whether every parseable patch applied to its repository is not known. The 2/731 is retained as the measured score, with widespread patch-format failures; it does not establish the issue-solving ability of those patches after hypothetical header repair. The runner now recounts hunk headers before submission, rejects count mismatches and records parse status for the raw and submitted patch; the stored run predates that repair. The declared licence for the dataset is null in the lane's own receipt. The evaluation harness is `scaleapi/SWE-bench_Pro-os` at commit `ca10a60a5fcae51e6948ffe1485d4153d421e6c5`, and the 731-task scoring run used the 731 official run scripts unmodified on native `linux/amd64` Modal workers. A 1,200-second timeout, against the official 120, was used only in an earlier single-task harness check that ran the gold patch under arm64 QEMU emulation. That check is recorded as not a model score, so the timeout deviation does not apply to the 2/731 figure.

E2 — FrontierSWE. The scientific result remains partial at 1/17 tasks. The public package does not supply the original execution route or privately held operational records.

E4 — BankerToolBench. The surviving historical summaries and recovered finish ledger report restored public artifacts and 1,175 manifest checks passing. The recov-

ered ledger specifically reports 0/6 pass3/pass16 archive artifacts available, with only `TINKER_BRIDGE.json` verifying. This supports the historical archive-loss account, not a fresh verification of the archive or a replacement of the receipt-only 0.3115 metric.

E7 — BinaryAudit. The recovered finish ledger preserves both the terminal table's "1/46 attempted" and its superseded historical snapshot's "1/28 errored". The terminal figure is retained in Chapter 8. Recovery makes both source statements directly inspectable, but the ledger does not explain their denominator difference and the raw attempt inventory has not been revalidated here.

E9 — MLE-bench. Coverage without complete grading is not a score, and the lane records it as such. Behind the coverage number sit 97 legacy receipts across 50 competition identifiers, of which 41 graded receipts cover 40 unique competitions; the ledger's integrity check verifies precisely that decomposition. The separate merged-vLLM arm holds seven receipts, of which exactly one is a valid grade (H&M, 0.02132) and six are invalid submissions, and the integrity check confirms that arm is recorded separately with one graded row. One old Spooky Author submission is absent locally although the later run's complete submission is retained.

D.6 Replacement-scope lane narratives, 27 September 2026

Three things changed in how the lanes were executed, and each is recorded as a deviation in the lane's own result file. First, where a fail-closed controller blocked only on paperwork that the directive had superseded, the lane used a thin runner that calls the benchmark's native loop and native grader directly. Second, compute moved off AWS: E2, E6 and E9 ran on Google Cloud virtual machines, E1's grading ran in Modal sandboxes, and E13 ran locally. Third, every lane was served the same actor, `campaign-actor-bf16` (the base model with the seed809 adapter merged, §8.1), through vLLM with the non-thinking chat template. No lane went through the Tinker bridge implicated in the E4 failure mechanism (§8.1.2, §8.5), so that defect is not expected here, although the lanes' result files do not record their stop settings. The shared endpoint served at a 32,768-token context. E5 used a dedicated 65,536-token copy of the same weights because its banking prompts exceed 32k.

E1 — SWE-bench Multilingual. This run covers the 16 wave-10 recovery tasks and the 174 tasks that the 12 September waves never reached, 190 tasks in all. The actor resolved one (`phpoffice__phpspreadsheet-3463`), which is 1/190 = 0.53 per cent. Only 57 of the 190 produced a patch that applied and could be graded: 120 failed at patch application or evaluation and 13 produced an empty patch. Over graded tasks alone the

rate is 1/57 = 1.75 per cent ([0.3, 9.3]). Thirteen tasks produced no generation and were scored as failures: eight exceeded the 32,768-token serving context and five hit provider errors. The earlier waves covered the other 110 tasks, with 4 resolved (3.64 per cent, [1.42, 8.98]). They used the same task universe, adapter and grader family, but served at a 65,536-token context, and their source-context collector was lost and had to be re-implemented for this run. Because the contract differs, the two runs are not combined, and the lane does not report a 300-task figure.

E2 — CORE-Bench, hard difficulty. The actor answered every question correctly on 27 of the 45 `codeocean_hard` capsules, a task accuracy of 0.600. At the question level it answered 53 of 79 correctly: 28 of 33 written questions and 25 of 46 vision questions. Thirty-two tasks ended with the agent calling `finish`, ten at the 150-turn cap and three at the 8,100-second time limit. The agent was a thin tool loop (`bash`, `query_image`, `finish`) rather than the benchmark's reference CORE-Agent scaffold, and the same actor answered the vision queries. Thirty tasks never reached a machine because of a local DNS outage, and a driver crash then interrupted ten of their reruns. All thirty were rerun from scratch, and every aborted attempt is archived. Because a leak of the answers would inflate this figure, the lane checked for one. No agent command referenced any host that serves the answers. Each capsule's `results/` directory is stripped before the agent starts, and the answer keys are held off the agent's machine. Two qualifications remain. Twelve of the 27 correct tasks left no files in the capsule's results directory, which the native grader does not require. Some vision questions are categorical and could be guessed. With n = 45 the interval spans 27 percentage points.

E5 — Tau3. Eight of 97 tasks succeeded, a pass^1 of 0.082. Twenty-five tasks ended in infrastructure errors: fourteen exceeded the 65,536-token context and eleven returned an empty assistant message. Their cause is not established, and they count as failures. An accidental resume of the run overwrote 24 of those error records in the results file; their identifiers and causes were rebuilt from the run log. Over the 72 tasks without such an error the native pass^1 is 8/72 = 0.111, reported as a sensitivity figure only. The 20 tasks cleaned before 19 September were rerun under the same protocol rather than carried over, and scored 1/20. The user simulator was `gpt-4.1-2025-04-14` at temperature 0.

E6 — WebArena. All 812 tasks were run, and 90 succeeded, giving 0.111. The figure is a lower bound. Of the 114 tasks whose native evaluator calls an LLM judge, 108 could not be graded, because the judge was unavailable for the run; the other six were resolved to zero by a non-judge check. Forty-one tasks failed with a harness-level browser timeout. Both groups count as failures. The graded-only rate is 90/704 = 0.128 ([0.105, 0.155]). If every ungraded task had passed, the rate would be 198/812 = 0.244. With the 41 harness errors counted as failures, the true figure lies between 0.111 and

0.244, and nearer the lower end if the ungraded tasks succeed at the graded rate. The native judge model (`gpt-4-1106-preview`) is retired, so a later regrade would substitute a different judge. Most failures are early stops by the native loop: the same action three times (237), the same typing three times (103), the step limit (101), and three consecutive parse failures (98). The agent was limited to 384 output tokens per step, the few-shot examples were passed as user and assistant turns because the chat template rejects mid-conversation system messages, and sites were not reset between tasks, as in the native runner. The last 103 shopping-admin tasks were split across three containers of the same official site image to finish in time.

E9 — ML-Dev-Bench. Ten of the 34 released tasks passed their native validators, 0.294. The agent was the benchmark's OpenHands CodeActAgent, limited to 50 iterations. No task errored or timed out, but only after one harness repair: OpenHands 0.21.0 hangs when it truncates its context window, and a one-line upstream fix was backported without touching prompts, validators or tasks. Thirty-nine of 1,045 model calls exceeded the 32,768-token context and were absorbed by that truncation path. A relay between the agent and the actor forced the non-thinking template and restored tool-call text that the server's parser had dropped. An earlier four-task batch that hung before the repair is excluded.

E13 — BALROG. All 255 native episodes were played and graded, and the BALROG score is 26.1 per cent progression (standard error 1.77; a stratified bootstrap gives [22.7, 29.5]). BALROG's score is the mean of six per-environment means, not a mean over episodes. By environment the actor reached BabyAI 82.0 per cent (n = 50), Baba Is AI 25.0 (n = 120), Crafter 22.7 (n = 10), TextWorld 16.9 (n = 30), MiniHack 10.0 (n = 40) and NetHack 0.0 (n = 5). Sampling followed the recorded protocol at temperature 1.0, but with thinking off where the original run had it on. A 2,000-step cap was placed on NetHack for cost; all five NetHack episodes ended on their own before it, so the cap never took effect. Episodes stopped by an operational stop or a hung worker were restarted from scratch with fresh seeds. The result file records 262 episode attempt records for the 255 scored episodes, of which 7 are marked killed for restart (`n_killed_for_restart_records`); its caveat text instead counts 11 restarts (one NetHack and five Baba Is AI episodes at the 01:40 UTC stop, plus five hung workers), and the file does not reconcile the two counts. If hangs correlate with episode difficulty, that is a mild selection risk. The run used macOS arm64 builds of the pinned sources rather than the Linux image. The 26.1 figure is on a different scope from the 26-episode small-scale E13 rows of Tables 8.A and 8.B and is not compared with them.

The launch-pending and quota labels of 19 September no longer describe any lane.

D.7 E4 rerun: reported audit and causal limits

The recovered finish ledger records E4 as `CLOSED_PARTIAL`, preserving the 19 September close-out. It reports the pass3/pass16 archive as missing (0/6 archive artifacts; only `TINKER_BRIDGE.json` verifies), and keeps the 0.3115 recovery metric as receipt-only evidence. Its updates through 21 September state that the full 100-trial rerun had not launched. That snapshot cannot substantiate the later completed rerun. The surviving 26 September E4 result's `prior_base_run` field instead reports a 21 September run with 100 trials, one error and mean reward 0.0. Its source job receipt remains unrecovered in this package, so the detailed account below remains historical rather than a fresh trajectory-level verification.

The earlier report describes the rerun as the base model with a zero-initialised LoRA snapshot, equivalent to base sampling with no training steps, through the Modal bridge `/v1/responses` path at `--n-concurrent 2`. It reports 100 of 100 trials, one `NonZeroAgentExitCodeError`, a mean reward of exactly 0.0, all one hundred trials in the 0.0 bucket and a runtime of 3 hours 29 minutes. The surviving `outputs/e1_e14_small_scale_2026-09-26/E4/result.json` (`prior_base_run`) corroborates the 100 trials, one error, zero mean and reward buckets, and identifies the serving path. The exact launch configuration, named error type, cap and runtime are not established by that secondary field and cannot be rechecked against the unrecovered `outputs/e4_banker_toolbench/official_repo_ff6db552/jobs/btb-banking-tasks-tinker-bridge/result.json`. None of those later-run details is attributed to the recovered pending-state snapshot.

The historical audit reports a failure mechanism across the one hundred trajectories. Agents reportedly terminate after 2 to 14 steps, with a median of about 6, and produce no `deliverables/` directory; the verifier consequently short-circuits to 0.0 on the message "No deliverables found". Twenty-seven or more of the trajectories end in role-token degeneration of the form `user user assistant ...` repetition. The record at the time read this as the base model being unable to sustain the opencode tool-use loop. A later bridge check exposes an alternative explanation, so that reading is not identified by this uncontrolled run. The bridge's `/v1/responses` path passed no stop sequences and decoded with special tokens removed, so generation ran past the end-of-turn token into invented `user`, `tool_response` and `assistant` turns, which is exactly the role-token degeneration observed. The corrected shim scored 0.4087 on `btb-19b3361c`, but that single-task success is compared with 100 bridge trials under different tasks, serving path and caps. The contrast supports a plausible mechanism that can cause zero-reward trajectories; it does not quantify the defect's contribution to the full zero or rule out model limitations. The reported no-deliverables check is consistent with fail-

closed grading, but the absent raw trajectories prevent a fresh verification of the cause of every zero. No unconfounded full-suite BankerToolBench capability estimate exists for this actor family; the other measurement is the six-task subset of Tables 8.A and 8.B. The same bridge served E2, E5, E7 and the E9 streaming arm, so Table 8.2 marks those lanes as exposed to the same defect. In particular, the rerun's 0.0 must not be set against the original single-task outcome as though the two were a controlled pairing: they are different configurations under different runtime conditions, and the campaign makes no comparison between them.

The historical rerun report records 16.35 million prompt tokens and 2.18 million completion tokens. These token details cannot be rechecked against the absent job receipt. The surviving `outputs/e1_e14_small_scale_2026-09-26/E4/result.json` (`prior_base_run`) repeats the 100 trials, one error and zero mean; its `verifiable_from_raw` flag is a historical assertion and does not establish raw-artifact availability in this repository.

D.8 Externally blocked lanes and verification limits

Seven original contracts remain externally blocked: SDAB, BinaryAudit, LifeSciBench, AgentHarm, AppBench, OpenReward and FrontierMath. These are coverage limitations, not scored failures or evidence about model ability. Replacement scopes retain their separate names and denominators. Operational access correspondence, contact destinations, account capacity, request identifiers and account costs are omitted from this public derivative.

The historical record reports eleven deterministic checks covering selected arithmetic, coverage and source bindings. This is not an independent re-execution of the benchmarks, and it does not establish universal receipt availability. The original campaign recovery and stored-payload checks have the bounded scope stated in Appendix B.

D.9 Small-scale reruns: detail and per-lane caveats

The small-scale protocol records retention of each lane's items, raw outputs and grader logs for recomputation. This is a source-corpus retention claim, not a statement that all payloads accompany this public package. Its included-file boundary is recorded in the public availability manifest (Appendix I).

For E12 the 151 rubric items come from only six generated applications, so they are not independent. The cluster-level test is an exact sign-flip test over the six per-app pass-rate

differences (−0.042, +0.030, 0.000, −0.160, 0.000, −0.042), and it gives p = 0.25. The E12 grader is an LLM judge that is the same `Qwen/Qwen3.6-35B-A3B` base model as the base arm, so self-preference could favour the base arm. Two judge versions disagree widely (0.536 against 0.808 on the Tinker base run; `E12/result.json`). The E12 rates and difference are therefore judge-dependent, and no independent judge was run. For E4, all six tasks score 0 in both arms except `btb-19b3361c`; a Wilson interval is not valid for a mean of fractional [0, 1] rewards, and a bootstrap over one nonzero difference in six is nondegenerate but has little empirical support: the stored percentile interval is [−0.0799, 0.0], with its shape determined by resampling that one task. The main table therefore omits an inferential interval. For E13, in 22 of the 26 episodes the progression is identical in the two arms. No lane-level difference is interpreted as evidence that the adapter improves or degrades performance unless its test excludes zero, and none is extrapolated to the full suite.

The principal caveat for each lane, as recorded in its result file, is listed below; the full list is in each lane's `result.json`.

- **E1.** New base-model arm; not comparable to or poolable with the original 2/731. Original inference temperature was 0.2; this public subset cannot replay its private execution route.
- **E2.** Substitute benchmark; never pool with or present as the FrontierSWE lane score (original: 1/17 tasks, replay 0.8628). Original execution access is outside this public package.
- **E3.** New base-model arm; never pool with or present as the original SDAB/seed809 lane score.
- **E4.** Small n=6 of 100; one nonzero task, so no interval is reported (the result file's Wilson95 on summed fractional reward is not valid for a [0,1] mean).
- **E5.** n=10, not the requested 20: the E4+E5 6M Tinker-token cap was exhausted (E4 1.56M, abandoned APEX attempt 2.33M, tau2 2.05M).
- **E6.** Tasks drawn by random.Random(20260926).sample from all 128 sorted miniwob env ids; episode seeds 0-2.
- **E7.** New base-model arm; never pool with or present as the original lane score.
- **E8.** New base-model arm; not comparable to or poolable with the seed809-adapter 1967/1967 run (22.88%); the public subset cannot replay the original execution route.
- **E9.** Competition pool: 6 low-split competitions with small non-image-heavy data (detecting-insults, jigsaw-toxic, leaf-classification, nomad2018, random-acts-of-pizza, spooky); 5 drawn by random.Random(20260926).sample. n=5 so the CI is very wide.
- **E10.** New base-model arm on AgentHarm itself; the seed809-adapter lane figure

(AgentDojo benign utility 88/97 = 90.72%; original execution route not supplied publicly) is a different benchmark and not comparable.

- **E11.** New base-model arm; not comparable to the retained adapter receipt 129/312 = 41.35% (that run used thinking-default template, temperature 0.2, all 312).
- **E12.** Public tasks, not held-out. Label mandatory. New base-model arm; never pool with the original lane.
- **E13.** New base-model arm; not comparable to or pooled with the original seed809-LoRA E13 plan (21-episode BabyAI admission set).
- **E14.** New base-model arm; the prior native accepted-set score 2271/4426 = 51.31% (all-disposition diagnostic 2271/4428 = 51.29%) is not comparable (different actor, full split).

Appendix E

Corrections to Internal Source Documents

The numbers in this thesis are drawn from the project's internal source documents: the unpublished P1–P8 reports and their section files, audit summaries and result files. Some of those documents contain errors — a wrong sign, a test applied to the wrong unit of analysis, an interval that does not describe its own estimate, or a label that does not match the rows it covers. The chapters report only the corrected value and mark it "(corrected; see Table E.1)". This appendix records, for each correction, what the source states, what the thesis uses instead, and the basis for the change, so that a reader who opens the source can reconcile it with the thesis. Caveats about the evidence itself, as opposed to errors in a source document, stay in the chapters. Paths are relative to the repository root; "sections/" is `platform_hybrid/paper/sections/` and "results/" is `platform_hybrid/experiments/results/`.

Corrections applied to internal source documents.

Table E.1: Corrections applied to internal source documents. Each row's corrected value is the one used in the chapter named in the first column.

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§1.2 (variant audit)	`zvf-program/audit/STATISTICAL_REANALYSIS.md`	Percentile-bootstrap 95% intervals over the eight seeds, e.g. Dr. GRPO −0.00200, [−0.00950, +0.00725]	Paired-t 95% intervals, e.g. Dr. GRPO −0.00200, [−0.01272, +0.00872], p = 0.673; DAPO +0.00100, [−0.00632, +0.00832] (also in Table 1.1)	A percentile bootstrap undercovers at n = 8; recomputed from `zvf-program/audit/results/full/*.json`
§4.1, §6.2.3 (same-stack PPO vs GRPO)	`sections/frontier_synthesis_scaling.tex`	Reports paired Δ = −0.002, p = 0.374 without naming the model or task	`Qwen/Qwen2.5-0.5B`, two-digit addition, 40 steps, five paired seeds, 200 fresh draws per seed	`results/samestack_ppo_grpo.json`; `platform_hybrid/experiments/modal/modal_samestack_ppo_grpo.py`

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§1.2, §4.1, §6.2.3, §6.4.2, §6.6 (same-stack PPO vs GRPO pairing)	`sections/frontier_synthesis_scaling.tex`; `results/samestack_ppo_grpo.json`	A paired comparison over five seeds, each seed's held-out accuracy on 200 items	Paired by seed only: the GRPO and PPO evaluation sets of a seed share 6, 6, 4, 7 and 3 of 200 items; evaluation items also drawn in training are 12/16/13/15/13 of 200 for GRPO against 90/86/80/83/74 for PPO; the stored -0.002, p = 0.374 is unchanged	Exact replay of the Python RNG stream in `modal_samestack_ppo_grpo.py`: the evaluation set is drawn from the shared stream after training, and GRPO consumes 16 draws per step against PPO's 128
§6.3.2 (60-run ZVF ranges)	`sections/p2_results_intro.tex`	The 60 runs behind the late-phase and early-phase ZVF ranges and the lag-1 autocorrelation of ≈ 0.94 are "measured"	45 of the 60 are five-seed variance-mitigation projection rows; only the remainder, which includes the 12-run group-size sweep, is measured	The nine-row panel comes from the dry-run file `experiments/results/variance_mitigation.tsv` (`results/zvf_by_library.tsv`)
§6.3.3 (ZVF against the Bernoulli null)	`sections/group_size.tex`	Closed form evaluated at each arm's held-out accuracy (0.964, 0.954, 0.923 and 0.704 at G = 2, 4, 8, 16), giving negative residuals	Per-step-average null 0.828, 0.709, 0.597, 0.522 against measured 0.838, 0.764, 0.691, 0.631; residuals +0.010, +0.055, +0.094, +0.109, positive at every G	ZVF is a training-batch quantity and held-out accuracy is not; recomputed from `results/groupsize_zvf_swee p.json`; the per-step-average baseline is the one named in `sections/appendix_zvf_formalization.tex`
§6.3.4 (naive ZVF–accuracy correlation)	`sections/zvf.tex`	r = 0.22 over n = 23 pooled rows, bootstrap 95% CI $[-0.29, 0.94]$	Historical n = 17 and Fisher-z 95% CI $[-0.29, +0.63]$; inferential reading withdrawn: nine cells are synthetic and targets are mixed	The residual table on disk, `results/zvf_iter26_residual.tsv`, holds 17 rows; source membership and target definitions prevent a measured held-out interpretation
§6.3.4 (residualised ZVF)	`sections/zvf.tex`	After regressing out mean reward, residualised ZVF remains positively associated with last-10 accuracy, r = +0.80, 95% CI [+0.54, +1.00]	That slice is the n = 9 variance-mitigation rows, a simulation projection; historical mixed-source residual r = +0.205, Fisher 95% CI $[-0.31, +0.62]$, p = 0.43, n = 17; inferential reading withdrawn	`results/zvf_iter26_residual.tsv`; nine of seventeen finite cells are synthetic and the target mixes outcomes including late training reward; see §6.3.4 and the Colab lineage audit
§6.4.1 (group-size TOST)	`sections/group_size_iter27.tex`	TOST p-values against G = 2 of $p < 10^{-9}$ at G = 4 and G = 8 and $p < 10^{-4}$ at G = 16, with accompanying intervals	Seed-level paired TOST (margin ± 0.02, n = 3): p = 0.012 (G = 4), 0.043 (G = 8), 0.056 (G = 16); equivalence not established at G = 16; the source intervals are withdrawn	The source's analysis unit is not established by its p-values: parametric TOST can yield very small p-values even at n = 3. The thesis instead recomputes the test from the three paired seed-level values
§6.4.1 (retention asymptote)	`sections/group_size_iter27.tex`	Asymptote interval [0.712, 0.745] for $R(T) = 0.729 + 0.247\, e^{-T/5.76\mathrm{M}}$	No confidence interval; the fit is illustrative only	A three-parameter curve through four reconstructed points leaves one residual degree of freedom

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§6.4.2 (algorithm axis of the factorization audit)	`results/berkeley/unpacking_dpo_ppo_factorization.json`	"DECISIVE" equivalence of GRPO and PPO	Equivalence not established; paired t $p = 0.374$ is the primary test, exact sign-flip $p = 0.625$	A failure to reject is not equivalence; paired TOST at ±0.005 gives $p = 0.104$ (§6.2.3)
§6.4.2 (H1, gradient-utilisation ratio)	`results/berkeley/adding_error_bars_summary.json`; `sections/p3_conclusion.tex`	Graded DECISIVE, with interval [4.16, 4.82]	Held at hypothesis-generator status; point estimate 5.03, no interval reported	The interval excludes its own point estimate; it is taken over n = 4 budgets around their mean of 4.456, and the audit's own note says "n=4 budgets … cannot support CI on the ratio"
§6.4.2 (H2, retention-versus-token slope)	`results/berkeley/adding_error_bars_summary.json`; `sections/p3_conclusion.tex`	Graded DECISIVE, with interval [−0.237, −0.038]	Held at hypothesis-generator status	The slope is fitted to the four reconstructed budgets of the token-budget grid, not to trained arms
§6.5.3 (sliding-window trap rate)	P4 source, `sections/length_bias.tex`	The 6/16 (37.5%) sliding-window rate is an upper bound on trap prevalence in the controlled data	A point estimate; Wilson 95% CIs [5.7%, 51%] (2/10), [30%, 90%] (4/6), [18.5%, 61%] (6/16)	A point estimate is not a bound
§6.5.3 (iteration-20 mechanism regression)	`sections/length_bias.tex`	Arithmetic OLS slope "reduced by 0.43" with 95% CI [−0.58, −0.28], paired p = 0.036; Theil–Sen "reduced by 1.11" with CI [−1.59, −0.63], p = 0.047	Dr. GRPO minus GRPO, paired by seed, n = 5: OLS +0.43 [+0.18, +0.68], paired t $p = 0.009$; Theil–Sen +1.11 [+0.33, +1.88], $p = 0.017$; permutation $p = 0.0625$ for both	With mean OLS slopes of −3.65 (GRPO) and −3.22 (Dr. GRPO), Dr. GRPO minus GRPO is positive, so the printed intervals have the wrong sign, and the source's CIs and p-values do not come from the same test; recomputed from `results/length_bias_mechanism_per_run.tsv`
§6.5.3 (iteration-24 late-window sign-flip)	`sections/length_bias.tex`; `results/length_bias_iter24_signflip.tsv`	Sign-flip p = 0.468, 0.562, 0.011 and p < 0.001 across the four cells; unit the within-run window	Exact two-sided sign-flip permutation over seeds: p = 0.688 (arithmetic GRPO), 0.625 (arithmetic Dr. GRPO), 0.250 (GSM8K GRPO), 0.250 (GSM8K Dr. GRPO); unit the seed, floor 0.25 at n = 3	The source labelled a one-sample t-test over per-seed fractions as a sign-flip test; on three identical values it returns t = −∞, p = 0; recomputed by `platform_modal/scripts/length_bias_iter24.py`
§6.5.3 (Benjamini–Hochberg over fourteen exploratory tests)	`sections/length_bias.tex`	GSM8K Dr. GRPO sign-flip the sole survivor at q = 0.014; arithmetic OLS and Theil–Sen at q = 0.051 and 0.058	No test survives. Across all 120 fourteen-of-sixteen selections, the smallest adjusted value ranges from 0.116 to 0.487; all sixteen together give 0.132	The original fourteen-test family is not uniquely specified. Recomputed from paired iteration-20 per-run summaries and window-10 iteration-24 p-values; the earlier claim of an invariant 0.116 was false

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§6.5.4 (GSM8K-CoT pre-to-post gains)	`sections/p4_results_intro.tex`	McNemar exact $p = 1.1 \times 10^{-4}$ (GRPO) and 7.6×10^{-4} (Dr. GRPO), pooled over seeds	Seed-level one-sample t on the three per-seed deltas: $p = 0.0051$ (GRPO), $p = 0.0099$ (Dr. GRPO)	The pooled test treats the 600 seed-item pairs as independent, but the same 200 items recur across seeds; recomputed from `results/drgrpo_gsm8k_cot.json`
§6.5.4 (iteration-136 late-efficiency contrast)	`results/berkeley/adding_error_bars_summary.json`; `sections/p4_conclusion.tex`	Graded DECISIVE, with "one-sided parametric p = 0.031"	Suggestive: $p = 0.031$ is an exact one-sided Wilcoxon signed-rank p at its $n = 5$ floor (1/32); paired $t(4) = 5.96$, two-sided $p = 0.004$; two-sided sign-flip $p = 0.0625$; Holm across the eight-hypothesis family gives 0.25	Recomputed from `length_bias_iter136_step_coupling.tsv`
§7.1 (variance decomposition, algorithm axis)	`sections/p5_evidence.tex`; `results/p5p8/p5_headline_cis_full.tsv`	η^2 ZVF bootstrap CI [0.0014, 0.0585], graded DECISIVE (algorithm explains at most about 6% of ZVF variance); reward CI [0.0014, 0.0577]	Within-method step-bootstrap CIs: ZVF [0.0094, 0.1476], graded SUGGESTIVE; reward [0.0019, 0.0790]; point estimates 0.0454 and 0.0075 unchanged; still too narrow because steps are autocorrelated	The source bootstrap resampled the pooled steps, which gives a null band rather than a CI; on the `loss` column it gave [0.0014, 0.0582] around an estimate of 0.9867; recomputed by `platform_modal/scripts/p5p8/p5_headline_cis_full.py`
§7.1 (variance decomposition, group-size axis)	`sections/p5_evidence.tex`	$\eta^2 = 1.0000$ for the group-size axis, and group-size-to-algorithm ratios of 22× (ZVF) and 133× (reward)	No group-size η^2 and no ratio reported	Computed on `groupsize_zvf_sweep.tsv`, which holds one row per G level (4 cells, df = 0 within), so $\eta^2 = 1$ by construction
§7.1 (98-cell decomposition)	`sections/p5_evidence.tex`	Stack-to-seed variance ratios of 503× to 96,128×	Not quoted as effect sizes	The seed axis rounds to 0.000, so the ratios divide by a near-zero quantity
§7.1 (manifest–outcome coupling)	`sections/p5_stack.tex`, §Live-Corpus Coupling	Hamming distance predicts $\lvert\Delta\text{ZVF}\rvert$ with Spearman $\rho = +0.529$ and $\lvert\Delta\text{PCD}\rvert$ with $\rho = +0.541$, $p \le 10^{-3}$	$\rho = +0.44$ (ZVF), +0.39 (PCD), +0.28 (reward) over all 4,753 pairs of the 98 cells; Mantel permutation $p < 10^{-3}$ for each	The source script `platform_modal/scripts/p5p8/p5_manifest_outcome_coupling.py` and its committed output give +0.407 and +0.336 on a 2,000-pair sample; no variant reproduces +0.529 or +0.541; pair-level p-values are invalid because pairs share cells; recomputed in `thesis_review_2026-09-27/stats_followup/m18_mantel_summary.json`
§7.2 (same-stack method deltas)	`sections/p6_measured_evidence.tex`	AERO and AREAL reward decreases with intervals excluding zero, read as resampling prompt-steps, uncorrected	Intervals resample the last 10 of 40 steps; exact sign-flip Holm p = 0.047 (AERO), 0.047 (AREAL), 0.23 (GIFT); at prompt level the AERO interval includes zero	Recomputed from `n2_reward_tensor_resume/*_s0_tensors.jsonl`; `thesis_review_2026-09-27/stats_followup/m16_summary.json`

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§7.3 (hindsight-optimal shrink rule)	`sections/p7_controller.tex`	The 0.797 cost ratio of the per-prompt hindsight optimum is a ceiling on rollout spend	The best cost ratio under a no-shrinking-of-saturated-prompts constraint, not a lower bound on cost for any adaptive rule	Dualformer-Auto's observed 0.66 to 0.68 on the four-bin rule is cheaper
§8.1, §8.3, Appendix D §D.5, §§9.1–9.3 (E1 interpretation)	`seed1818/receipt.json`; `E1_E14_Results.md`	713 native evaluations of model patches behind 2/731	593 of 713 submitted patches are corrupt for `git apply` (hunk-header counts) and were tested on the unpatched base; 711/713 parse with `--recount`; both passes are among the 120 that parse; 2/731 unchanged; end-to-end issue-resolution score with a major patch-format limitation	`git apply --stat` over the stored `candidates.json`; official entry script runs plain `git apply` and continues on failure
§8.1, §8.2, Appendix D §D.3–D.4, §9.3 (E11 failure attribution)	`e11_full_receipt.json`; earlier campaign transcription	150 of 183 failures are format failures; parseable-only 129/162 a format sensitivity	The 150 extraction failures occur under a 1,024-token cap with thinking on (mean 1,002 of 1,024 tokens), a plausible contributor; exact cap-hit counts and its causal effect are not established; same adapter 33/50 with thinking off at 4,096 tokens against 23/50 for this run on a 50-item subset (McNemar $p \approx 0.006$); some extracted code may come from unterminated reasoning drafts; 129/312 unchanged	`outputs/e1_e14_small_scale_2026-09-26/E11/paired.json` against the receipt's per-problem verdicts; extractor in `zvf-program/flagship/modal_e1_e14.py`
§8.1, §8.2, Appendix D §D.4 (E14 generation budget)	`native_dispositions.jsonl`; earlier transcription	51.29% read as the replacement-scope accuracy with a 67.3% cap rate disclosed	Capped responses 1,029/2,982 = 34.5% correct, uncapped 1,242/1,446 = 85.9%; confounded by difficulty; 2,271/4,428 unchanged	Recount of stored dispositions by `completion_tokens` = 2,048
§8.2, Appendix D §D.4 (E11 bootstrap script)	Earlier thesis citation	Script at `outputs/PES_Phase2_Third_Review_2026-09-24/analysis/e11_design_cluster_bootstrap.py`	`platform_hybrid/experiments/scripts/e11_design_cluster_bootstrap.py` and `.json`; interval [0.3429487, 0.4871795] reproduced exactly	The cited path was never committed and is gitignored
§8.2, Appendix D §D.4 (E14 denominator label)	Recovered `outputs/PES_Phase2_Review_2026-09-12/finish/e14_terminal_note_2026-09-19.json`; recovered finish `Pending_Experiments.md`	Terminal note writes `2271/4428 = 0.5131043831902395`; finish table pairs `2271/4428` with 51.31%	Existing thesis arithmetic is retained: 2,271/4,428 = 51.29% over all dispositions; 2,271/4,426 = 51.31% over judged rows	Exact arithmetic and supplementary stored native-score fields distinguish denominator 4,426 from the all-4,428 diagnostic; originals preserved unchanged; no re-judge
§8.2, Appendix D §D.4 (E10 protocol attribution)	Earlier campaign transcription; recovered `agentdojo_native_receipt.json`	Attack, defence and security-evaluation fields all null; upstream commit attributed to native receipt	`attack` and `defense` are null; `security_evaluation` is false; receipt binds v1.2.2 and contains no upstream benchmark commit field	Direct inspection of the byte-preserved original; no new security or held-out claim

Location in thesis	Source document	What the source states	Corrected value / reading	Basis
§8.5, Appendix D §D.7 (E4 later-rerun attribution)	Earlier campaign transcription citing finish `Pending_Experiments.md` for the completed 100-trial rerun	Pending-state ledger cited as evidence for later zero-reward rerun details	Recovered ledger says NOT launched at its 21 September snapshot; 100 trials, one error and zero mean are supported here by surviving E4 `result.json` → `prior_base_run`	Temporal source correction only; raw rerun receipt remains unrecovered and detailed launch/trajectory/spend fields remain historical

E.1 Evidence-scope repairs after the 2 October review

The following corrections were made without new model training or regenerated historical receipts.

- **ZVF definition (§§4.3, 6.3.1, 7.1, 7.3).** Exact ties and sample variance $\leq 10^{-6}$ are now separate metrics. On the 600 stored groups, seeded micro-jitter changes exact ties from 95 to zero, but leaves 95 below the declared threshold. The epsilon sweep and source hashes are recorded in `pcd_vs_zvf_tolerance_analysis.json`.
- **Controller interpretation (§7.3).** Zero rescue after plugging $\hat{p} = 0$ or 1 into a Bernoulli model, or resampling eight identical rewards, is estimator-imposed. It does not show latent certainty or impossibility of recovery with independent continuations.
- **Loss provenance (§§1.1, 4.2–4.3, 6.3.1).** Zero-KL claims are row-specific. TRL nonzero-KL configuration evidence, adaptive-KL defaults, managed unknowns and actor source-binding gaps remain visible; zero reward-relative advantage does not imply a zero full optimiser update.
- **PPO and group-size scope (§6.5.5; Chapter 9).** The unsaturated rerun is present in the synthesis. Its five-seed PPO comparison is baseline-specific and test-sensitive (paired-t p = 0.016; exact p = 0.0625), with unequal prompt exposure and near-cap lengths. G8 minus G2 remains inconclusive, without equivalence.
- **E11 uncertainty (§8.2; Appendix D).** The point score stays 129/312. Resampling the 156 paired underlying designs gives a 95% percentile interval [34.3%, 48.7%], replacing the iid-312 Wilson interval. The conditional extracted-only score remains descriptive.
- **E4 mechanism (§8.5; Chapter 9).** Missing stops are a verified defect, but the one corrected-path task changes several conditions together and cannot attribute the full 100-trial zero to stops alone.
- **Source access (Appendix B §B.11; recovery update, 3 October).** Six exact originals covering all five previously missing basenames were recovered from

the Mac, including both pending-state snapshots, and preserved with hashes in a separate private package. All remain absent from the frozen checkout. Supplementary read-only checks corroborate stored E8/E10 grades and E14 disposition/denominator reporting; they do not rerun scorers or establish content decontamination. At that recovery stage, the training raw logs were unresolved; three originals have since been located and hash-matched locally (§B.11). The dirty execution source, exact consumed training rows and E4 raw rerun evidence remain unresolved. The E14 denominator and E10/E4 attribution repairs above change no scientific counts or existing thesis denominator arithmetic.

- **Fraud side-study intervals (§F.4).** Sensor-minus-full AUC and accuracy intervals are $[-0.0320, -0.0174]$ and $[-0.0160, -0.0109]$, reversing and reordering the source's opposite-direction intervals.

E.2 ESA Registry Description Corrections

The ESA preparation copy of 11 October 2026 corrects the registry description in §7.2 against executable source. The original 312-page review PDF and frozen source remain preserved separately. This derivative changes reporting language and formula notation; it does not rerun training, change a primary score or revise an ordinal risk value.

- **Comparison scope.** The old R0 description says identical manifests. The implemented rules cover selected fields only; schema-valid changes to model, task or decontamination can remain unscored. The later companion displays these differences and narrows the R0 message.
- **Risk branches.** Null sampler differences trigger R2. Differing loss or KL fields involving null, and differing variant statuses involving unknown, can trigger R5. R1 has no selecting path. Source-branch inspection and regression checks establish these distinctions.
- **Badge arithmetic.** The implementation uses Python round over seven block-completeness fractions, counting immediate non-null values. A synthetic six-full-plus-one-half case gives 93, whereas flooring would give 92. The historical badge values are unchanged.

The companion separately repairs advantage/response batch-length validation and preserves iterable log-probability inputs. These are later software changes with retained patches and base hashes, not evidence that a historical experiment encountered the defect. The original numerical/provenance audit remains evidence for its original scope; it does not independently certify these newly added implementation statements.

E.3 Adversarial ESA Documentation Review

The later 11 October review corrected reporting errors in prose, source definitions, figures and selected citations. Earlier PDFs and original results are preserved; the separate ledger records exact edits and hashes. No training or historical scorer was rerun.

- **Controller scope (§7.3).** The historical N10 implementation uses different threshold directions and a different observation unit from the original Bayesian policy. It therefore cannot be described as a faithful replication of that decision rule. The original policy and seed-robustness variant also require distinct descriptions.
- **Loss and telemetry scope (§§4.2–4.3; figures).** Current helper behavior is separated from older actor code and unknown dirty-source execution. Optional KL, auxiliary terms, clipping and aggregation prevent a universal claim that reward ties imply no optimiser update. Telemetry diagrams describe intended contracts, not proof that every historical run retained every field.
- **Statistical interpretation (§§6.4–6.6).** The review distinguishes paired differences from independent item uncertainty, positive changes from negative slopes, and failure to reject from equivalence. Unequal rollout budgets and evaluation overlap remain limitations on causal attribution. Approximate or simulated diagnostics are not validated performance predictors. The BH family-sensitivity check also corrects an invariant-value claim: the minimum adjusted value spans 0.116–0.487 across 120 fourteen-of-sixteen families, all non-significant.
- **Campaign reporting (Chapter 8; Appendix A).** E14 summaries and figures now lead with native accepted-set accuracy (2,271/4,426), retaining the all-disposition diagnostic (2,271/4,428) separately. Neither count nor stored grade changes. E11 now reads "312/312 evaluated; 129/312 pass", replacing an invalid equality. Registry entries are not all independent model-training experiments. Dataset naming, schema checks and identity receipts do not establish training-data decontamination. E4's surviving summary does not reconstruct a missing raw rerun receipt or identify one causal mechanism.
- **Literature and figures (Chapter 2; diagrams).** Selected claims were narrowed to the cited paper's conditions, including optional verifier costs, PPO clipping, toxicity prompts, predictive rollout skipping and model-subnetwork comparisons. Bibliographic identity checks alone are not full claim verification.

The updated number registry checks its declared numerical bindings only. It does not certify every sentence, figure interpretation, source authenticity or institutional completion. Detailed patch, citation and arithmetic receipts are supplied with the ESA review package.

E.4 ARS Panel Corrections, 19 October 2026 (claim-tier only; no new results)

This section records the 19 October 2026 corrected copy (`reports/public_revision_2026-10-19/`). The frozen 11 October 2026 export is unchanged. No training, benchmark evaluation, primary score, reference label or cohort selection was changed; preserved numbers stand unless the body already re-derived them.

- **Abstract rewritten to body tier (DA-CRITICAL-1, R1-W2).** Exact tests precede parametric tests: saturated PPO/GRPO exact sign-flip p = 0.625 before paired-t p = 0.374; unsaturated exact sign-flip p = 0.0625 (the n = 5 floor) before paired-t p = 0.016. The +0.050 unsaturated gap is demoted to "minimal untuned-critic PPO shows no detectable gain; GRPO arms gained", carrying the untuned-critic, 8× distinct-prompt exposure and near-cap length caveats inline. It is not evidence about PPO versus GRPO as algorithms.
- **Saturated contrasts → pilot only (R1-W1).** The saturated PPO/GRPO and group-size contrasts cannot separate no effect from no headroom (paired by seed, not by item; ~7% vs ~40% train–evaluation overlap). RQ2 rests on the unsaturated comparisons alone (§6.5.4, §6.5.5 and the eight-seed variant audit), with a powered, item-paired, training-disjoint design as required future work.
- **P2 → instrumentation; mixed pools quarantined (R1-W3).** ZVF predictive validity is unestablished. The historical $\rho \approx 0.27$ uses 17 finite cells (not 23), 9 synthetic, with mixed outcomes including training reward; 45 of the 60 "runs" behind ZVF ranges are simulation rows; the AUROC 0.929 panel has 41/52 rows synthetic safe rows plus 7 imputed collapse anchors. These analyses are quarantined in §6.3.4 as withdrawn and must not be cited as prognostic evidence.
- **Terminology (R2-W1).** Chapter 1's terminology box maps each study to *clipped-GRPO*, *REINFORCE group-mean*, or *unknown (managed/unrecovered)* and governs all headlines. Several best-audited stacks are REINFORCE group-mean, not GRPO as published; the campaign actor's executed loss is unknown.
- **Controller unevaluated (R2-W3).** The adaptive-G controller is unevaluated as a training policy. Plug-in "zero rescue" is estimator-imposed ($\hat{p} \in \{0, 1\}$ on 461/640 groups forces h_G = 1); the honest test — a matched-budget prospective bakeoff — was not run.
- **Stored-evidence and audit disclosure (R3-W1, R3-W2, DA-CRITICAL-3).** All actor-dependent campaign results are labelled "stored-evidence, not replayed". The public-checkout audit (970 registered: 828 PASS, 22 CONTEXT, 120 ARTIFACT_MISSING, INCOMPLETE; 33 passes are arithmetic from printed counts) is disclosed in the abstract, §1.8 and §9.2. Receipts bind

file consistency, not execution; the dirty source, exact consumed rows and sampler weights remain unrecoverable in this package.

- **Harness-score labelling and E14 erratum (R3-W3).** Campaign figures are end-to-end harness scores with failure-mode rates at first mention (abstract, §8.8). E14: 0.5131043831902395 = 2,271/4,426 (native accepted-set), not 2,271/4,428 (= 51.29%, all-disposition diagnostic); the recovered terminal note's denominator label is wrong and the note itself is preserved unchanged.
- **Declared-difference codes (R3-W4); validation tiers (DA-CRITICAL-2); C1 framing (R3-W5).** R0–R5 outputs are renamed declared-difference codes (not calibrated flip-risk); the registry is a schema proposal without external-corpus validation. Independent recomputation is distinguished from closed-system consistency (§9.2). C1 is a parser/reference audit case study, assistant-assisted without independent human validation; blind human rating of the 11 event cases is AUTHOR_TODO.
- **Verification pass on this copy (19 October 2026).** Every number added in this section and in the corrected headlines was traced to the body of the 11 October sources or to `reports/public_revision_2026-10-11/PUBLIC_CHECKOUT_NUMBER_AUDIT.json`. The terminology box now assigns each study from Table 4.2 (the group-size sweep and the four-method controller trace are REINFORCE group-mean, not clipped-GRPO); the 120 missing-artefact occurrences are located by chapter in §1.8; 501 of the 828 audit passes are identified as token-presence checks against the project's own sources; E1, E10 and E14 lane rows and figure captions carry the harness-score label; `stackdiff` wording in the research-question figure is changed to declared-difference codes; the controller's model-based refinements are moved under an archival subsection (§7.3.1); and §7.2 is labelled a schema proposal.
- **Author-only items are not fixed here.** Independent review of these exact bytes, PES AI-declaration confirmation, collaborator authorisation and a countersigned contribution matrix, blind human C1 rating, and checksum/quality-receipt regeneration for this copy are AUTHOR_TODO (`AUTHOR_TODO.md` in the 19 October export). Checksums and quality receipts for this copy are pending and were not regenerated or fabricated.

Appendix F

Applied Side Study: Credit-Card Fraud Detection (P8)

Scope statement (quarantined, 19 October 2026). This appendix is archival, not examinable RL contribution (see front-matter claim map); it is retained only as a measurement-discipline case study and should be read as at most a one-page summary. This appendix reports a side study. It uses synthetic data and sits outside the RL contribution of this thesis. The dataset is generated with scikit-learn's `make_classification`; the language-model arm is trained by supervised fine-tuning, not by reinforcement learning; and no result in this appendix is used to support any GRPO, PPO, ZVF, group-size or campaign claim elsewhere in the report. The study is retained, in condensed form, as the P8 slot of the internal report series and as one worked example of measuring a claimed capability rather than accepting its label.

The study compares a gradient-boosted tree with a fine-tuned language model on credit-card fraud detection. Its conclusion is that the tree keeps the real-time scoring seat, and that the language model's plausible roles lie in tasks the tree cannot perform at all.

F.1 Dataset, splits, and the two arms

The dataset is synthetic: `make_classification` (seed 42), 50,000 transactions, 20 anonymised numeric features V1–V20 (10 informative, 2 redundant), two clusters per class, class separation 0.8 and `flip_y=0.01`, with a realised fraud rate of 1.44%. Four per-row aggregates (mean, standard deviation, maximum, minimum) are appended, giving 24 features. The data reproduce class imbalance and anonymised feature shape, and none of the temporal drift, verification latency or adversarial adaptation of real card-fraud data.

Table F.1: The two arms of P8.

Arm	Configuration	Evaluation split
XGBoost (scorer)	200 estimators, depth 6, lr 0.05, subsample/colsample 0.8, `scale_pos_weight=7`; no search	80/20 stratified split, 10,000 test rows, 144 positives
Qwen3.5-4B SFT	TabLLM-style row serialisation; answer-token cross-entropy, no reference policy, no KL; 63 steps at batch 32	500-row positive-enriched held-out subset at 20% fraud, disjoint from training

Sources: platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_setup.tex; platform_hybrid/experiments/results/quick_20260704/qp8-fraud-sft_manifest.json; platform_hybrid/experiments/results/quick_20260704/qp8-fraud-sft.tsv.

F.2 The head-to-head result

Table F.2: Head-to-head result on the synthetic card-fraud set, by arm and evaluation split.

Arm	Eval split	*n*	Accuracy	ROC-AUC
XGBoost (scorer)	full test	10,000	n/a	0.7955
Qwen3.5-4B SFT	positive-enriched test	500	0.7920	0.4827

Source: platform_hybrid/experiments/results/quick_20260704/qp8_fraud.tsv.

The two AUCs sit on different held-out splits, so this is not a like-for-like ranking. The language model's AUC of 0.4827 is chance-level ranking: its Hanley–McNeil 95% CI, with 100 positives and 400 negatives, is [0.42, 0.55] and includes 0.5. Its accuracy of 0.792 is slightly *below* the 0.800 that a constant "legitimate" answer would score at 20% prevalence, so it is not evidence of discrimination. The tree's AUC interval is [0.75, 0.84], with 144 positives among 10,000 test rows. The tree's precision 0.723 (34/47, Wilson 95% CI [0.58, 0.83]), recall 0.236 (34/144, [0.17, 0.31]) and F1 0.356 at the

default threshold come from the released script's own run (AUC 0.7942, 0.49 s training, about 6 ms inference per 10,000 rows), which uses a slightly different configuration from the 0.7955 artefact. An older record of 21 June 2026 (XGBoost AUC 0.975, language model 0.948) could not be reconstructed and is not used.

F.3 Why the scoring seat stays with the tree

Four deployment considerations are proposed; they are not validated production comparisons:

- **Latency.** The source reports about 6 ms for a tree batch of 10,000 rows and roughly 300 ms for a language-model pass. These timings use different batch units and do not constitute a matched single-request latency benchmark.
- **Cost.** The released cost table puts the synchronous language-model path at about 35 times the per-transaction cost of the tree path.
- **Calibration.** Downstream expected-loss rules require calibrated probabilities. Neither model family's calibration on a target deployment follows from these AUC values; verbalised confidence would require separate validation.
- **Prompt injection.** A model that reads attacker-controlled text fields in a synchronous decision loop opens an injection channel that a tree scoring numbers does not have.

F.4 Supporting measurements

Table F.3: Supporting P8 measurements. Bracketed ranges are paired-bootstrap 95% intervals. The first row reports sensor minus full-feature performance; the AUC and accuracy intervals are reversed and reordered from the source's full-feature-minus-sensor convention. Source files are under `platform_hybrid/experiments/results/` and `platform_hybrid/paper/archive/absorbed/P08_fraud/sections/`.

Check	Result	Source
Aggregate-only tree (stand-in for a language-model "sensor") vs 24-feature tree	Worse on every axis: AUC −0.0245 [−0.0320, −0.0174], accuracy −0.0135 [−0.0160, −0.0109], Brier +0.0109 [0.0099, 0.0120]	p5p8/p8_headline_cis.tsv
Adding the four aggregates to the 20 raw features	AUC +0.0002 [−0.0002, 0.0007], within noise	p5p8/p8_headline_cis.tsv
Leakage caveat	Tables reporting AUC 0.998–0.999 fit on `fraud_data.csv` and score a subset of it; they are in-sample descriptive comparisons and cannot establish out-of-sample benefits. The separately held-out split gives 0.7955	p8_evidence.tex
Cost per fraud caught ($0.50/alert, $100 missed-fraud loss)	Raw features $2.68; sensor-augmented $3.28; sensor-only $14.92; the sensor never pays for itself in the 25-cell (σ, L) grid	p8_evidence.tex
Sensor-noise break-even	$5.29 (oracle), $26.44 ($\sigma \leq$ 0.02), $36.40 ($\sigma$ = 0.05)	p8_noisy_sensor.tex

F.5 Proposed roles for the language model

The study argues, without measuring, that the language model's useful roles are tasks the tree cannot enter: document and image fraud through a vision-language model, draft-

ing compliance narratives (Suspicious Activity Reports under 31 C.F.R. § 1020.320; adverse-action reasons under 12 C.F.R. § 1002.9), cold-start triage of new fraud typologies before labels exist, and post-score investigation of the alert queue. The proposed architecture keeps XGBoost as the scorer and uses the language model as a sensor (typed features, no authority) and a scribe (narratives conditioned on the tree's own attributions, with a human signature). The "85 times cheaper than an analyst" triage figure is an internal estimate from June-2026 token prices and assumed investigation times, and has not been validated.

F.6 Limitations

The dataset is synthetic and single-generator, so no number here is a production expectation, and there is no cross-institution or public-benchmark replication. The challenger is one model family, one serialisation and one fine-tuning budget. Of the proposed roles, only the scorer comparison carries a measurement of the study's own; the others rest on external literature and regulatory text, and nothing in the compliance discussion is legal advice.

Appendix G

C1 Evidence and Case Ledger

Benchmark reference errors, ambiguous questions and equivalent units limit what this diagnostic can establish. Its frozen parser-defined result is **11/64 questions (17.19%; Wilson 95% interval 9.88-28.21%)**. Assistant-assisted reconciliation corroborates **three numeric recovery witnesses on the same 64-question denominator**. This 3/64 count (4.69%) describes the support found under a conservative review rule; it does not replace the frozen endpoint or estimate a population recovery rate. The other eight parser events include three convention-dependent interpretations, four materially ambiguous cases and one match to an incorrect reference answer. [S1-S4]

The study contains no training update. It does not measure useful reinforcement-learning gradients, reasoning improvement, controller superiority, held-out accuracy or general model capability. The prompts are public GSM8K training questions and are fresh only to this campaign. Historical V2 evidence remains separate and unpooled.

G.1 Event ledger

The following ledger accounts for every frozen primary event. C labels use the zero-based selected index. Fresh indices identify all parser-success outputs among the 24 fresh draws. Complete question IDs, reference hashes, response hashes and review notes accompany the editable case ledger. [S3]

Table G.1: Complete accounting of all eleven parser-defined events.

Case and source rank	Reference	Fresh success indices	Interpretation
C00 Santana presents, 676	8	12, 15, 23	Corroborated
C07 Suzanne bread, 912	26	2, 5, 10, 15, 16, 21	Corroborated
C08 Citations, 923	4	0, 1, 3, 15, 23	Convention / disagreement
C19 Pet owners, 1482	100	4, 16	Ambiguous
C20 Raft capacity, 1544	17	23	Convention / disagreement
C29 Fundraiser, 2044	475	2, 4, 7, 13, 21, 22	Convention / disagreement

Case and source rank	Reference	Fresh success indices	Interpretation
C35 Checkpoints, 2593	6	6, 7, 10, 22	Wrong reference
C37 Walking distance, 2660	36	0, 22	Ambiguous
C38 Hank reading, 2699	810	2	Corroborated
C47 Cake and ham, 3203	12	0, 4, 5, 9, 22	Ambiguous
C50 Reggie marbles, 3255	1	2, 15, 22	Ambiguous

C00 Santana presents. Gold 8 is (4 second-half birthdays+7 Christmas gifts)-3 March gifts. Both reviews support the quantity. Fresh 12 matches 8 through a false 8-0 argument; fresh 15 and 23 give the correct 11-3 calculation.

C07 Suzanne bread. 3 slices per meal × 2 weekend meals × 52 weeks/12 slices per loaf = 26. Sharing one slice does not require knowing the number of daughters. All 8 initial 90/91 claims use seven days per week; every fresh 26 uses the correct weekend schedule.

C08 Citations. Other citations most naturally means the combined non-parking count: L+L+2(L+L) = 24 gives 4. All initial 6 claims substitute twice one category. First treats that as material ambiguity; second supports 4. Ordinary-reading support is stronger than the per-category alternative, but disagreement remains and this is not added to the corroborated recovery count.

C19 Pet owners. Half of pet owners plus disjoint exhaustive dog/cat ownership gives 100; half of all citizens gives 300 under the same partition. Overlap allows other values. The denominator ambiguity is material even if ordinary classroom partition assumptions are granted.

C20 Raft capacity. The ordinary exact additive-space model makes 14 jackets occupy 7 person-spaces; 8 jackets reduce 21 by 4, yielding 17. Arbitrary real packing/safety possibilities do not by themselves constitute a defect. First conservatively withheld support; second accepts the conventional model. Retain that disagreement and conditional event support only in the ledger.

C29 Fundraiser. Next 4 days naturally names a single comparison period, making 950 the four-day total and shortfall 475 per student. Initial 0 answers insert per day before multiplying by 4; the text does not say each day. Retain the first alternative-scope objection and second conventional support, not a revised recovery estimate.

C35 Checkpoints. Interior route checkpoints at mile 1 and mile 25 enclose 24 miles and 3 intervening gaps, hence 8 miles. The closing 2-mile arc is outside those gaps. All 8 initials give 8; all 4 gold matches 6 divide by 4 and are wrong. Screen 1 has an internally contradictory parenthetical despite its correct final 8.

C37 Walking distance. Summed person-distance is 5 × 3 × 6+12+6 = 108; shared outings counted once give 36. The aggregate quantity is genuinely different. Initial 0-6

are correct under person-mile reading; initial 7 incorrectly repeats weekly extras and gets 198. Neither gold-matching response proves the 108 answers wrong.

C38 Hank reading. 5 × (30+60)+2 × 2 × (30+60) = 810 minutes. Reference final sentence mislabels subtotals but final 810 is correct. Initial 630/690/1350 claims are wrong; fresh 2 visibly supplies the correct 450+360 calculation.

C47 Cake and ham. Cake-day overlap with any ham day during the week has probability 3/5 = 60%. A specified/randomly sampled test day has joint probability 3/25 = 12%. Both reviewer rounds retain sampling-unit ambiguity; all 5 fresh 12 matches use the latter event.

C50 Reggie marbles. With starting Reggie count R and losses L,90 = R+10 × (9-2 L), so R = 20 L. His friend's 100 does not set R. Multiple feasible starts/losses exist. Gold's net-loss shortcut is invalid; all 3 fresh 1 matches have defective justifications. There is no uniquely correct loss count.

G.2 Complete reference classification index

This index preserves all 64 selected questions, including non-events. W = second-review wrong final value; A = material ambiguity; I = inconsistent premises; R = correct final value with flawed reference explanation; S = supported; C = supported with conventional assumptions. The category column uses the refined mutually exclusive mapping. An asterisk marks a retained first/second category disagreement. E marks a frozen parser event; N marks a conservative numeric witness. Neither marker changes the reference classification. [S2, S4]

Table G.2: Complete bounded-cohort index. The JSON and CSV ledgers retain full identifiers, both review labels and case-specific explanations.

Selected case	Source rank	Recorded gold	Category	Event and witness
C00	676	8	S	E N
C01	706	42	C	-
C02	754	200	W*	-
C03	803	200	A	-
C04	846	40	A	-
C05	855	625	S*	-
C06	878	480	W	-
C07	912	26	S	E N
C08	923	4	S*	E
C09	925	50	I	-
C10	945	1886	S	-
C11	950	41	W	-
C12	1078	2460	W	-
C13	1139	25	W	-
C14	1227	95	C*	-
C15	1266	49	W	-

Selected case	Source rank	Recorded gold	Category	Event and witness
C16	1307	301	S*	-
C17	1357	560	W	-
C18	1377	96	W	-
C19	1482	100	A	E
C20	1544	17	C*	E
C21	1739	750	A	-
C22	1743	50	W	-
C23	1780	3	A	-
C24	1872	35	S	-
C25	1897	2100	C*	-
C26	1921	23	W	-
C27	1932	140	A	-
C28	1996	99	R	-
C29	2044	475	C*	E
C30	2095	4	W	-
C31	2142	540	A	-
C32	2211	42	A	-
C33	2446	280	W	-
C34	2514	3	A*	-
C35	2593	6	W	E
C36	2617	24	C	-
C37	2660	36	A	E
C38	2699	810	R	E N
C39	2748	56	A	-
C40	2769	40	C	-
C41	2899	400	A	-
C42	2989	1100	A	-
C43	3021	9	C*	-
C44	3089	8000	A	-
C45	3118	350	R	-
C46	3119	163	S	-
C47	3203	12	A	E
C48	3209	1000	A	-
C49	3216	5	A*	-
C50	3255	1	A	E
C51	3259	983	I	-
C52	3277	84	C	-
C53	3299	128	W	-
C54	3335	30	W	-
C55	3409	7	R*	-
C56	3421	57	S	-
C57	3464	90	W	-
C58	3533	25	C*	-
C59	3536	6	S	-
C60	3579	40	S	-
C61	3581	4	A	-
C62	3593	400	S	-
C63	3597	52	C	-

G.3 Public evidence availability

The included case ledger preserves all sixty-four classifications, all eleven parser-defined events, scientific hashes and review disagreements. The following key resolves the sci-

entific source labels used in Chapters 4 and 7. The companion `c1_reference_bindings.json` records checksums for S1-S9; their underlying payloads are not included. S10 identifies the excluded historical smoke record; S12 and S13 identify reported scientific sources. Their exact checksum bindings and payloads are unavailable in this package. Their settings in Chapter 4 are therefore reported provenance, not a fresh verification of those source bytes.

Table G.3: C1 scientific source key. A checksum binds an identified source; it does not supply its contents or verify model execution. S10 does not contribute to the primary endpoint; S11 is not cited in this derivative.

Label	Scientific source	Included evidence
S1	Frozen C1 automated endpoint	Description and checksum binding
S2	Reconciled scientific evidence	Description and checksum binding
S3	All eleven event records	Description and checksum binding; case summaries in the included ledger
S4	All sixty-four reference classifications	Description and checksum binding; classifications in the included ledger
S5	Unit-sensitive response review	Description and checksum binding
S6	Review source bindings	Description and checksum binding
S7	Final coverage receipt	Description and checksum binding
S8	Prospective parser result	Description and checksum binding
S9	Independent prospective parser verification	Description and checksum binding
S10	Reported historical smoke provenance	Operational record excluded; cited only for imported smoke accounting

Label	Scientific source	Included evidence
S12	Reported generation configuration	Identifier and reported settings only; exact checksum unavailable
S13	Reported scientific manifest	Identifier and reported settings only; exact checksum unavailable

Operational closeout records, runtime/session identifiers, raw archive transfer bindings and allocation details are excluded. The case ledger is sufficient to inspect the reported classifications and disagreements, but not to independently regrade all original completions.

Appendix H

Source Reference Map

Source references do not imply bundled or public payloads. Safe scientific paths are retained; private operational identifiers and export paths are omitted. The availability manifest distinguishes included documents from withheld evidence. Missing records were not regenerated, and coverage is incomplete. Table sources stay beneath their tables.

H.1 Chapter 1: Introduction

1.1 Background: critic-free RL post-training and the group-relative estimator

- `platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex`
- `platform_hybrid/paper/sections/group_size.tex`
- `platform_hybrid/paper/sections/zvf_iter122.tex`
- `platform_hybrid/paper/main_eai_body.tex`

1.2 A Motivating Example

- `platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex`
- `platform_hybrid/paper/main_eai_body.tex`
- `platform_hybrid/paper/sections/_shared_methods.tex`
- `autoresearch/deli-neurips-tmlr-260802/audits/statistical_refutation.md`

1.3 Problem Statement

- platform_hybrid/paper/main_eai_body.tex
- platform_hybrid/paper/sections/_shared_methods.tex
- platform_hybrid/experiments/results/samestack_ppo_grpo.json
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex

1.5 Scope and Non-Goals

- outputs/wrong_cohort_2026-10-02/continuation_c1/final_analysis/summary.json
- outputs/wrong_cohort_2026-10-02/continuation_c1/assistant_audit/final_reconciliation/final_evidence_summary.json

1.6 Contribution of the Candidate

- platform_hybrid/sem 4 work/EXPERIMENTS.md
- platform_hybrid/sem 4 work/README.md
- platform_hybrid/sem 4 work/PROVENANCE.md
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- autoresearch/deli-neurips-tmlr-260802/audits/statistical_refutation.md

H.2 Chapter 2: Literature Survey

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex

2.1 From RLHF and PPO to Group-Relative Methods

- capstone-literature-survey/section_2_2_rlhf.tex
- capstone-literature-survey/section_2_3_ppo.tex
- capstone-literature-survey/section_2_5_grpo.tex
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- capstone-literature-survey/section_2_6_deepseek_r1.tex

2.2 Direct Preference Optimisation as a Contrast

- capstone-literature-survey/section_2_4_dpo.tex

- platform_hybrid/paper/sections/related_work_v2.tex
- platform_hybrid/paper/sections/p7_intro.tex

2.3 Fixing GRPO's Biases and Collapse

- platform_hybrid/paper/sections/p4_intro.tex
- platform_hybrid/paper/sections/p6_intro.tex
- platform_hybrid/paper/sections/related_work_v2.tex
- platform_hybrid/paper/sections/p7_intro.tex
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/sections/variance_mitigation_comparison.tex
- platform_hybrid/experiments/results/drgrpo_vs_grpo.json
- platform_hybrid/experiments/results/drgrpo_gsm8k_cot.json

2.4 Verifiable Rewards, Frameworks and Reporting Practice

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/sections/related_work_v2.tex
- capstone-literature-survey/section_2_8_mathematical_reasoning_benchmarks.tex
- platform_hybrid/paper/sections/p5_related.tex
- platform_hybrid/experiments/results/p5p8/p5_iter109_minreport_coupling.tsv
- platform_hybrid/experiments/results/p5p8/p5_iter109_crossref_verify.tsv
- platform_hybrid/experiments/results/p5p8/p5_iter109_bib_audit.tsv
- platform_hybrid/paper/sections/p6_intro.tex
- platform_hybrid/paper/sections/p6_related_resources.tex

2.5 Scaling and Layer-Adaptation Context

- platform_hybrid/paper/sections/related_work_v2.tex
- platform_hybrid/paper/sections/p1_intro.tex
- platform_hybrid/paper/sections/p2_intro.tex
- platform_hybrid/paper/sections/p3_intro.tex

- platform_hybrid/paper/sections/p4_intro.tex
- platform_hybrid/paper/sections/frontier_synthesis_scaling.tex
- platform_hybrid/paper/sections/p1_conclusion.tex
- capstone-literature-survey/section2_7_peft.tex
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex

2.6 Process-, Tree- and Stability-Aware Variants

- platform_hybrid/paper/sections/related_work_v2.tex
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/sections/p7_intro.tex

2.7 Positioning the Portfolio

- platform_hybrid/paper/sections/p6_related_resources.tex
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- outputs/e1_e14_small_scale_2026-09-26/E4/BRIDGE_STOP_TOKEN_FINDING.md
- platform_hybrid/paper/sections/related_work_v2.tex

H.3 Chapter 3: System Requirements Specification

3.1 Overview and Actors

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- zvf-program/flagship/e1_e14_completion_gate.py

3.4 Test-Case Specification

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_local/run_all_audits.py
- utils/audit_utils.py
- platform_local/claim_strength_audit.py

- platform_local/paper_sync_audit.py
- platform_local/export_guard_audit.py
- platform_local/scientific_audit.py
- zvf-program/flagship/e1_e14_completion_gate.py
- platform_hybrid/paper/paper_P6_registry.tex
- platform_hybrid/registry/query.py

3.7 Software Requirements

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_local/run_all_audits.py
- utils/audit_utils.py
- zvf-program/flagship/e1_e14_completion_gate.py
- platform_hybrid/registry/query.py
- platform_local/scientific_audit.py
- outputs/PES_Phase2_Third_Review_2026-09-24/thesis/assemble_thesis.py
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md

3.8 Constraints and Assumptions

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/paper_P7_zvf_controller.tex
- platform_hybrid/experiments/modal/modal_groupsize_zvf_sweep.py
- platform_hybrid/experiments/modal/modal_samestack_ppo_grpo.py
- platform_hybrid/experiments/modal/modal_samestack_gsm8k_cot.py
- platform_hybrid/paper/sections/_shared_methods.tex
- platform_hybrid/experiments/results/framework_comparison.json
- platform_hybrid/paper/paper_P1_scaling.tex
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- platform_hybrid/paper/paper_P6_registry.tex

H.4 Chapter 4: Proposed Methodology

4.1 The Design Commitment to Attribution

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex

- platform_hybrid/sem 4 work/submissions/mtech-final-review/build_review_pptx.py, slide 7
- platform_hybrid/experiments/results/samestack_ppo_grpo.json
- platform_hybrid/paper/sections/_shared_methods.tex, its status is recorded in §6.2.3
- platform_hybrid/paper/neurips_2026_variants/paper_P8_workshop.tex, Table tab:configs
- platform_hybrid/paper/neurips_2026_variants/paper_P8_workshop.tex
- platform_hybrid/paper/sections/_shared_methods.tex
- platform_hybrid/paper/sections/_shared_methods.tex, §6.1

4.2 Per-Step Telemetry

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/sections/p2_abstract.tex

4.3 Formalising the Zero-Variance Fraction

- platform_hybrid/paper/sections/appendix_zvf_formalization.tex
- platform_hybrid/paper/neurips_2026_variants/paper_P8_workshop.tex
- platform_hybrid/paper/sections/zvf_pipeline_spec.tex
- platform_hybrid/experiments/modal/modal_groupsize_zvf_sweep.py
- platform_hybrid/experiments/modal/modal_samestack_ppo_grpo.py
- platform_hybrid/experiments/modal/modal_samestack_gsm8k_cot.py, §6.3.3, §6.4.3
- platform_hybrid/paper/sections/p2_abstract.tex
- platform_hybrid/paper/sections/appendix_zvf_formalization.tex, results in Chapter 6 §6.3.3
- platform_hybrid/paper/sections/p7_abstract.tex
- platform_hybrid/paper/sections/p2_abstract.tex, results in Chapter 6 §6.3.4
- platform_hybrid/paper/sections/zvf.tex, §6.3.2

4.4 The Eight-Study Portfolio

- platform_hybrid/sem 4 work/README.md

- platform_hybrid/paper/sections/p1_abstract.tex
- platform_hybrid/paper/sections/p2_abstract.tex
- platform_hybrid/paper/sections/p3_abstract.tex
- platform_hybrid/paper/sections/p4_abstract.tex
- platform_hybrid/paper/sections/p5_abstract.tex
- platform_hybrid/paper/sections/p6_abstract.tex
- platform_hybrid/paper/sections/p7_abstract.tex
- platform_hybrid/sem 4 work/submissions/mtech-final-review/README.md
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_abstract.tex
- platform_hybrid/paper/PAPERS_README.md

4.5 The Design of the E1–E14 Evaluation Campaign

- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- outputs/public_portfolio_2026-09-05/agentdojo_native_receipt.json
- outputs/modal_e1_e14/2026-08-16/e11_full_receipt.json
- zvf-program/flagship/
- outputs/public_portfolio_2026-09-05/decontamination/README.md
- zvf-program/flagship/PAVLOV_EXPERIMENT_PROTOCOL_2026-08-09.md

H.5 Chapter 5: Implementation Details

5.1 Two Rosters, One Dispatch Surface

- platform_hybrid/paper/sections/_shared_methods.tex
- platform_tinker/atropos/
- platform_tinker/atropos/README.md

5.2 The Adapter Architecture: What versus Where

- platform_local/unified/backends/base.py
- platform_local/unified/matrix.json
- platform_local/unified/launcher.py
- platform_hybrid/experiments/framework_config_dumps/README.md

5.3 The Tinker GRPO Loop

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_tinker/tinkerrl/grpo.py, make_grpo_loss_fn
- platform_tinker/tinkerrl/grpo_cli.py
- platform_tinker/tinkerrl/grpo.py, training loop, CLI displays the resulting counters

5.4 The Parallel Runner and a Real Logging Defect

- platform_hybrid/experiments/results/p3_groupsize/FINDINGS.md

5.5 The Colab White-Box Path (Per-Layer Gradient Profile)

- platform_hybrid/experiments/results/p1_layerfreeze/FINDINGS.md
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/experiments/results/p1_layerfreeze/scaled_4seed_result.json
- platform_hybrid/experiments/openings/p1_layer_profile_scaled.py, lines 229–235
- platform_hybrid/experiments/results/p1_layerfreeze/FREEZE_FINDINGS.md

5.6 Software Modules

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_local/unified/

5.7 The E1–E14 Evaluation Harness

- zvf-program/flagship/e1_e14_completion_gate.py
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md

5.8 The Bridge and Sampler Path

- zvf-program/flagship/modal_tinker_openai_bridge.py
- zvf-program/e1_wave10/README.md

5.9 Recovery Re-implementations under zvf-program/

- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- zvf-program/e2_core/launch_gate.py

H.6 Chapter 6: Results I: Core GRPO Studies (P1–P4)

6.1 Scope, Sources and Evidence Boundary

- platform_hybrid/paper/sections/p1_abstract.tex
- platform_hybrid/paper/sections/zvf.tex
- platform_hybrid/paper/sections/p3_intro.tex
- platform_hybrid/paper/sections/length_bias.tex
- platform_hybrid/paper/sections/_shared_methods.tex

6.2 P1 — Cross-Library and Cross-Scale GRPO Behaviour

- platform_hybrid/paper/sections/p1_abstract.tex

6.2.1 The anchor pool and the fitted saturation forms

- platform_hybrid/paper/sections/p1_abstract.tex
- platform_hybrid/paper/sections/scaling_laws.tex

6.2.2 The cross-scale test and its nulls

- platform_hybrid/paper/sections/scaling_laws.tex
- platform_hybrid/paper/sections/scaling_laws.tex, lines 306–318

6.2.3 Where the geometric template fails

- platform_hybrid/paper/sections/p1_abstract.tex
- platform_hybrid/paper/sections/_shared_methods.tex, Chapter 1 §1.2

6.2.4 A withdrawn architectural contrast

- platform_hybrid/paper/sections/scaling_laws.tex
- provenance in autoresearch/deli-neurips-tmlr-260802/state/nemotron_architecture_resolution.md
- platform_hybrid/paper/sections/scaling_laws.tex, Table tab:scaling-iter17-kappa
- platform_modal/scripts/scaling_law_iter17.py, lines 442–456

6.3.1 Definition and measurement

- platform_hybrid/paper/sections/zvf.tex
- platform_hybrid/paper/sections/p2_abstract.tex
- platform_modal/scripts/pcd_vs_zvf.py
- platform_hybrid/experiments/results/pcd_vs_zvf_tolerance_analysis.json
- platform_hybrid/experiments/results/pcd_vs_zvf_epsilon_sensitivity.tsv

6.3.2 Source-reported magnitudes across libraries

- platform_hybrid/paper/sections/zvf.tex
- platform_hybrid/experiments/results/zvf_by_library.tsv
- platform_hybrid/paper/sections/p2_results_intro.tex

6.3.3 The all-correct wall and the mastery–incapacity aliasing

- platform_hybrid/paper/sections/zvf.tex
- platform_hybrid/paper/sections/p2_conclusion.tex
- platform_hybrid/paper/sections/frontier_synthesis_zvf.tex
- platform_hybrid/paper/sections/appendix_zvf_formalization.tex

6.3.4 Prognostic value — withdrawn mixed-pool analyses (quarantined; do not cite as predictive evidence)

- platform_hybrid/experiments/results/zvf_iter26_residual.tsv, corrected, see Table E.1
- platform_hybrid/paper/sections/zvf.tex
- platform_hybrid/experiments/results/zvf_summary.tsv
- platform_hybrid/experiments/results/zvf_iter26_residual.tsv
- reports/project_finish_2026-10-11/colab_validation/result.json
- platform_hybrid/paper/neurips_2026_variants/paper_P8_workshop.tex
- platform_hybrid/paper/sections/appendix_zvf_formalization.tex
- platform_hybrid/paper/sections/p2_results_intro.tex
- platform_hybrid/experiments/results/claim_to_run/claim_to_run_table.tsv, Appendix A, claim P2-C2
- platform_modal/scripts/zvf_diagnostic_iter130.py
- platform_hybrid/paper/sections/p2_conclusion.tex
- platform_hybrid/paper/sections/frontier_synthesis_zvf.tex

6.4.1 The measured sweep

- platform_hybrid/paper/sections/group_size.tex
- platform_hybrid/experiments/results/group_size_effect_dpo_check.tsv
- platform_hybrid/paper/sections/group_size_iter27.tex
- platform_hybrid/paper/sections/p3_abstract.tex

6.4.2 The same-stack four-axis audit and the reconstructed budgets

- platform_hybrid/experiments/results/berkeley/unpacking_dpo_ppo_factorization.json
- as summarised in platform_hybrid/paper/sections/p3_conclusion.tex
- platform_hybrid/experiments/results/berkeley/adding_error_bars_summary.json
- platform_hybrid/experiments/results/group_size_g4_vs_g32_broader_scale.tsv
- platform_hybrid/experiments/results/findings_ledger.jsonl
- platform_hybrid/paper/sections/group_size.tex
- platform_hybrid/paper/sections/group_size_iter23.tex
- platform_hybrid/paper/sections/p3_conclusion.tex
- platform_hybrid/paper/sections/p3_abstract.tex

6.4.3 The curriculum and matched-token null results

- platform_hybrid/experiments/results/curriculum_opening/FINDINGS.md
- as summarised in platform_hybrid/paper/sections/robustness_smallscale_nulls.tex
- platform_hybrid/paper/sections/robustness_smallscale_nulls.tex
- platform_hybrid/experiments/results/p1_layerfreeze/scaled_4seed_result.json

6.5.1 The controlled null

- platform_hybrid/experiments/results/drgrpo_vs_grpo.json
- platform_hybrid/paper/sections/length_bias.tex
- platform_hybrid/experiments/results/drgrpo_gsm8k_cot_full.json
- platform_hybrid/paper/sections/p4_abstract.tex

- platform_hybrid/paper/sections/p4_results_intro.tex

6.5.2 The roster-level verbosity-trap audit

- platform_hybrid/paper/archive/absorbed/U01_main_compendium/main.tex
- the same rates appear in platform_tinker/reports/combined/combined_capstone.tex, where the trap rates are given as GRPO 36% and PPO 71%
- platform_tinker/reports/combined/combined_capstone.tex
- platform_hybrid/paper/sections/length_bias_iter48.tex

6.5.3 Elevated analyses

- platform_hybrid/paper/sections/length_bias.tex
- platform_modal/scripts/length_bias_mechanism.py, lines 189–235
- platform_hybrid/experiments/results/length_bias_mechanism_mediation.tsv

6.5.4 Held-out generalisation and the scale extension

- platform_hybrid/paper/archive/absorbed/U01_main_compendium/main.tex
- platform_hybrid/paper/sections/p4_results_intro.tex
- platform_hybrid/paper/sections/p4_intro.tex
- platform_hybrid/paper/sections/p4_abstract.tex
- platform_hybrid/paper/sections/length_bias.tex
- platform_hybrid/experiments/results/berkeley/adding_error_bars_summary.json
- platform_hybrid/paper/sections/p4_conclusion.tex

6.5.5 Same-stack rerun on the unsaturated configuration

- platform_hybrid/experiments/modal/modal_samestack_gsm8k_cot.py
- platform_hybrid/experiments/results/samestack_gsm8k_cot.json
- platform_hybrid/experiments/results/samestack_scope_check.json
- regenerated by platform_hybrid/experiments/scripts/samestack_scope_check.py from samestack_gsm8k_cot_full.json

H.7 Chapter 7: Results II: Reporting, Registry and Controller (P5–P7)

7.1 A Minimum Reporting Standard for Stack-Conditioned Results (P5)

- platform_hybrid/paper/sections/p5_intro.tex
- platform_hybrid/paper/sections/p5_evidence.tex, Table tab:p5-h2h
- platform_hybrid/paper/sections/p5_stack.tex, §Item 3
- platform_hybrid/paper/sections/p5_abstract.tex
- platform_hybrid/paper/sections/p5_evidence.tex, Exhibits 5 and 7
- platform_hybrid/experiments/results/groupsize_zvf_sweep.tsv
- platform_hybrid/paper/sections/p5_stack.tex, Table tab:p5-minreport
- platform_hybrid/paper/sections/p5_stack.tex, Table tab:p5-ushape
- platform_hybrid/paper/sections/p5_stack.tex, Table tab:p5-gsize
- platform_hybrid/paper/sections/p5_stack.tex, §Item 7
- platform_hybrid/paper/sections/p5_stack.tex, §Item 8
- platform_hybrid/paper/sections/p5_evidence.tex, Exhibit 8
- platform_hybrid/paper/sections/p5_evidence.tex, Exhibits 6 and 18
- platform_hybrid/paper/sections/p6_registry_health.tex, Table tab:p6-minreport-subfield, reported for the same corpus
- platform_hybrid/paper/sections/p5_evidence.tex, Table tab:p5-discriminative-entropy
- platform_hybrid/paper/sections/p5_evidence.tex, Table tab:p5-field-suff
- platform_hybrid/paper/sections/p5_evidence.tex, Table tab:p5-manifest-self-suff
- platform_hybrid/paper/sections/p5_stack.tex, §Placebo-Replacement Bound
- platform_hybrid/experiments/results/p5p8/p5_placebo_replacement.tsv
- platform_hybrid/paper/sections/p5_stack.tex, §Live-Corpus Coupling
- recomputed in outputs/PES_Phase2_Third_Review_2026-09-24/thesis_review_2026-09-27/stats_followup/m18_mantel_summary.json, reported, not publicly verifiable from this package, §1.8

7.2 The GRPO-Registry (P6) — a schema proposal

- platform_hybrid/paper/sections/p6_abstract.tex

- platform_hybrid/paper/paper_P6_registry.tex
- platform_hybrid/paper/sections/p6_schema.tex
- platform_hybrid/paper/sections/p6_population.tex
- platform_hybrid/paper/sections/p6_registry_health.tex
- platform_hybrid/experiments/results/p5p8/registry_stress_per_run.tsv and registry_stress_summary.json
- platform_hybrid/paper/sections/p6_registry_health.tex, §Stress Test
- outputs/PES_Phase2_Third_Review_2026-09-24/thesis_review_2026-09-27/stats_followup/m16_summary.json, reported, not publicly verifiable from this package, §1.8
- platform_hybrid/paper/sections/p6_measured_evidence.tex, Table tab:p6-measured-deltas
- platform_hybrid/paper/sections/p6_registry_health.tex, §Contrastive Yield and Anti-Herding
- platform_hybrid/registry/query.py
- ESA companion tests/test_esa_registry_scope.py, see Appendix E §E.2

7.3 From Diagnostic to Controller (P7) — controller unevaluated as a training policy

- platform_hybrid/paper/sections/p7_abstract.tex
- platform_hybrid/paper/sections/p7_theory.tex
- platform_hybrid/paper/sections/p7_theory.tex, Tables tab:p7-modelG and tab:p7-gsweep
- platform_hybrid/paper/sections/p7_controller.tex, Table tab:p7-e3
- platform_hybrid/paper/sections/p7_controller.tex, Tables tab:p7-cf-sweep and tab:p7-cf-granularity

7.3.1 Archival detail: model-based refinements of the plug-in controller (not controller evidence)

- platform_hybrid/paper/sections/p7_controller.tex, §Bayesian Refinement
- platform_hybrid/paper/sections/p7_controller.tex, §Posterior-Predictive Contrast Restoration and §Statistically Validated Pareto Frontier
- platform_hybrid/paper/sections/p7_controller.tex, §Exact Finite-Pool Correction

7.3.2 Replication, design rules and status

- platform_modal/scripts/p5p8/p7_seed_robustness.py, lines 90–110 and 282–285
- platform_modal/scripts/p5p8/p7_n10_replication.py, lines 72–74 and 145–157
- platform_modal/scripts/p5p8/p7_bayesian_controller.py, lines 188–211
- platform_hybrid/paper/sections/p7_design_rules.tex

7.4 Historical V2 Frozen-Policy Fresh-Rollout Diagnostic

- outputs/rescue_colab_v2_2026-10-02/analysis_final/summary.json
- outputs/rescue_colab_v2_2026-10-02/audit/completed_primary_event_audit.json
- outputs/rescue_colab_v2_2026-10-02/analysis_final/validation.json
- outputs/rescue_colab_v2_2026-10-02/audit_method_disclosure.json
- outputs/rescue_colab_v2_2026-10-02/audit/independent_arithmetic_corroboration.json
- outputs/rescue_colab_v2_2026-10-02/independent_count_and_later_change_check.json
- platform_tinker/reports/final/evaluate_gsm8k_test.py

H.8 Chapter 8: The E1–E14 Evaluation Campaign

8.1 The evaluated actor and the one-actor design

- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md, the same identity pair is verifiable in the surviving E11 full receipt
- which also preserves the training sampler path [operational identifier withheld]: source outputs/modal_e1_e14/2026-08-16/e11_full_receipt.json, the corroborating E10 receipt
- outputs/public_portfolio_2026-09-05/agentdojo_native_receipt.json
- is now preserved in the withheld source archive and binds the same base/adapter identity

8.2 Suites with strictly complete scopes

- outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json, check strict_completed_suites_are_E8_E10_E11
- outputs/modal_e1_e14/2026-08-16/e11_full_receipt.json
- outputs/e1_e14_small_scale_2026-09-26/E11/paired.json
- bootstrap script and paired-outcome artifact platform_hybrid/experiments/scripts/e11_design_cluster_bootstrap.py and .json
- outputs/e11_verilog_eval/e11_verilog_eval_rerun_receipt.json
- outputs/e11_verilog_eval/lane_status_2026-08-09.md
- outputs/public_portfolio_2026-09-05/native_finish_v5/e14_official_collector/official_result01/native_dispositions.jsonl

8.3 Original-contract results

- outputs/modal_e1_e14/2026-08-16/e1_swe_bench_pro_full/seed1818/receipt.json
- outputs/e1_e14_results_2026-09-05/E1_E14_Results.md
- parse of the stored candidates.json beside the receipt
- the runner zvf-program/flagship/modal_e1_swe_bench_pro_full.py now repairs hunk headers before submission and records apply status, but the stored score was produced without that repair
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json

8.4 Replacement-scope lanes completed on 27 September 2026

8.5 The E4 rerun as a diagnostic

- outputs/e1_e14_small_scale_2026-09-26/E4/BRIDGE_STOP_TOKEN_FINDING.md

8.7 Small-scale reruns of all fourteen lanes

- outputs/e1_e14_small_scale_2026-09-26/PROTOCOL.md
- outputs/e1_e14_small_scale_2026-09-26/TRAINED_ACTOR_ENDPOINT.md

H.9 Chapter 9: Cross-Study Synthesis, Threats to Validity, Conclusions and Future Work

9.1 Cross-Study Synthesis

- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/paper/sections/p4_conclusion.tex
- platform_hybrid/experiments/results/berkeley/adding_error_bars_summary.json
- platform_hybrid/paper/sections/p3_abstract.tex
- platform_hybrid/paper/sections/p7_abstract.tex
- platform_hybrid/paper/sections/p5_abstract.tex
- platform_hybrid/paper/sections/p6_abstract.tex
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_abstract.tex
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md, withheld historical campaign chronology

9.2 Rigour and Threats to Validity

- outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json
- LIMITATIONS_AND_IMPACT.md §7.1, Table 1.1
- LIMITATIONS_AND_IMPACT.md §6.2
- LIMITATIONS_AND_IMPACT.md §7.1
- LIMITATIONS_AND_IMPACT.md §6.1
- platform_tinker/reports/combined/combined_capstone.tex
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- LIMITATIONS_AND_IMPACT.md §2.2, §2.3
- platform_hybrid/paper/archive/absorbed/U01_main_compendium/main.tex
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md §6
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md §9.5
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md §8
- LIMITATIONS_AND_IMPACT.md §7.2, §7.3
- LIMITATIONS_AND_IMPACT.md §3, §4

9.3 Conclusions

- platform_hybrid/paper/sections/p7_abstract.tex
- LIMITATIONS_AND_IMPACT.md §2.2
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex
- platform_hybrid/experiments/results/p1_layerfreeze/scaled_4seed_result.json

9.4 Future Work

- outputs/finish_pending_2026-09-27/E6/result.json
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md §5, withheld historical campaign chronology
- platform_tinker/reports/esa_phase1/Phase1_Project_Report_ZVF.tex

H.10 Appendix B: Reproducibility and Provenance

B.12 Fresh-Sampling Diagnostic: Frozen Contract and Audit

- research/rescue_sampling_v2_protocol_2026_10_02.md
- research/rescue_sampling_v2_freeze_2026_10_02.json
- research/rescue_v2_expected_cohort_2026_10_02.json
- research/rescue_answer_parser_v2.py
- outputs/rescue_colab_v2_2026-10-02/preflight/gold_parser_preflight.json
- outputs/rescue_colab_v2_2026-10-02/analysis_final/validation.json
- outputs/rescue_colab_v2_2026-10-02/audit_method_disclosure.json
- outputs/rescue_colab_v2_2026-10-02/audit/completed_primary_event_audit.json
- outputs/rescue_colab_v2_2026-10-02/audit/independent_arithmetic_corroboration.json
- outputs/rescue_colab_v2_2026-10-02/independent_count_and_later_change_check.json
- outputs/rescue_colab_v2_2026-10-02/analysis_final/summary.json
- outputs/rescue_colab_v2_2026-10-02/analysis_final/per_prompt.csv
- research/rescue_v1_manifest_reference_2026_10_02.json

H.11 Appendix D: Campaign Lane Detail

D.1 Actor identity, inference conditions and scoping notes

- recovered outputs/public_portfolio_2026-09-05/agentdojo_native_receipt.json, unrecovered withheld AgentDojo collector source

- outputs/modal_e1_e14/2026-08-16/e11_full_receipt.json
- outputs/e1_e14_results_2026-09-05/E1_E14_Results.md
- outputs/e11_verilog_eval/e11_smoke_receipt.json
- outputs/e11_verilog_eval/e11_trained_step40_receipt.json

D.4 Strictly complete scopes: lane detail

- recovered outputs/public_portfolio_2026-09-05/agentdojo_native_receipt.json
- outputs/modal_e1_e14/2026-08-16/e11_full_receipt.json
- outputs/e1_e14_small_scale_2026-09-26/E11/paired.json
- outputs/e11_verilog_eval/e11_verilog_eval_rerun_receipt.json
- outputs/e11_verilog_eval/lane_status_2026-08-09.md
- outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json, check E11_component_split_sums_67_plus_62_equals_129

D.5 Original-contract results: lane detail

- outputs/modal_e1_e14/2026-08-16/e1_swe_bench_pro_full/seed1818/receipt.json
- outputs/e1_swe_bench_pro/lane_receipt_2026-08-09.json
- outputs/e1_swe_bench_pro/preflight_2026-08-09.json
- outputs/e1_e14_results_2026-09-05/E1_E14_Results.md
- outputs/e1_e14_results_2026-09-05/E1_E14_Results.md, recovered withheld historical campaign chronology
- outputs/E1_E14_FINAL_RESULTS_2026-09-19.md
- outputs/verification/LEDGER_CODE_CHECK_2026-09-19.json

D.6 Replacement-scope lane narratives, 27 September 2026

- outputs/finish_pending_2026-09-27/E1/result.json
- outputs/finish_pending_2026-09-27/E2/result.json
- outputs/finish_pending_2026-09-27/E5/result.json
- outputs/finish_pending_2026-09-27/E6/result.json
- outputs/finish_pending_2026-09-27/E9/result.json
- outputs/finish_pending_2026-09-27/E13/result.json

D.7 E4 rerun: reported audit and causal limits

- outputs/e1_e14_small_scale_2026-09-26/E4/BRIDGE_STOP_TOKEN_FINDING.md

D.9 Small-scale reruns: detail and per-lane caveats

- outputs/e1_e14_small_scale_2026-09-26/PROTOCOL.md

H.12 Appendix F: Applied Side Study: Credit-Card Fraud Detection (P8)

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_intro.tex

F.1 Dataset, splits, and the two arms

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_setup.tex
- fraud_data.csv
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_limitations.tex

F.2 The head-to-head result

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_abstract.tex
- xgboost_results.json
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_setup.tex
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_limitations.tex

F.3 Why the scoring seat stays with the tree

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_scorer.tex
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_evidence.tex

F.5 Proposed roles for the language model

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_taxonomy.tex

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_compliance.tex
- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_architecture.tex

F.6 Limitations

- platform_hybrid/paper/archive/absorbed/P08_fraud/sections/p8_limitations.tex

Appendix I

Public Coverage and Source Availability

This appendix is the publication-safe derivative of a bounded source audit completed on 3 October 2026. It reports scientific source availability and limitations. It does not publish authenticated provider inventories, private project names, account-wide activity totals, collaborator identities or operational access correspondence. The underlying private audit records are withheld; these paragraphs do not turn their contents into independently reproducible public evidence.

I.1 Counting units and publication boundary

A scientific execution, a logging record, a training identity, a checkpoint revision and a claim-to-source link are different units. One execution can generate multiple records, retries and checkpoint versions. These units must not be added as independent trials. Appendix A retains scientific study scope and qualitative registry limitations; no account-wide inventory is included.

Provider inventory work used bounded pagination, immutable revisions where available, explicit source joins and missing-field handling. An inventory match establishes recorded identity within the inspected scope, not successful training, benchmark correctness or availability of all historical weights. Unavailable or inaccessible records, unresolved joins, unproven consumer-list exhaustion and missing history remain limitations. Account-wide counts and exact operational identities are omitted.

The editable sources and selected scientific case ledgers in this package can rebuild the public document. They cannot reproduce every experiment. The source-reference map is a map of reported scientific sources, including references whose original payloads are

retained outside this public package. The public availability manifest is the authority on which files are actually included.

I.2 Bounded checkpoint and provider evidence

Training metadata, checkpoint bytes and an executable serving route are distinct evidence. This public derivative does not publish private provider state, checkpoint-retention findings or exact execution identities. The public package cannot reproduce the original managed execution route, and no current account or private repository availability is asserted.

Public upstream model and benchmark revision references remain where scientifically relevant. Published Git or LFS identifiers are metadata, not a fresh byte-integrity test of a large tensor payload. Small public card, configuration and manifest checks do not establish numerical equivalence across serving stacks. No training, sampling or benchmark evaluation was rerun by this source audit. Per-step metric histories were not reanalysed.

I.3 Public P11 confirmatory bindings

The forty public manifest bindings below belong to P11, the five-algorithm by eight-seed confirmatory study. The repository naming convention includes e1, but these are not the E1 SWE-bench lane of the later fourteen-suite campaign. At the recorded audit date, all forty public pinned commits matched the public heads, and all forty downloaded run manifests matched both their expected SHA-256 and retained local bytes. The companion public binding file retains scientific units, immutable commit and checksum fields. Execution-specific repository access paths are omitted to avoid publishing embedded provider identifiers; this limits independent public replay from this package alone.

Each accepted unit records checkpoints at steps 5, 10, 15, 20, 25 and 30 plus a final adapter. Optional evaluation-resume sidecars were recorded for 36 of 40 units; that difference does not remove the matching final manifests. These are forty accepted scientific units, not forty additional trials inferred from provider logging.

Table I.1: Public P11 manifest checks. Full immutable revisions and manifest SHA-256 values are in public_p11_manifest_bindings.json.

Scientific unit	Public commit prefix	Manifest verification
aero/seed-107	`42980267a519`	Exact SHA-256 match
aero/seed-11	`2affa816a795`	Exact SHA-256 match
aero/seed-131	`ec9931f7fe85`	Exact SHA-256 match
aero/seed-23	`92123d35e401`	Exact SHA-256 match
aero/seed-37	`613d3f70cc0f`	Exact SHA-256 match
aero/seed-53	`448707a7a1dc`	Exact SHA-256 match
aero/seed-71	`5168da9f98c3`	Exact SHA-256 match
aero/seed-89	`43421d47afa9`	Exact SHA-256 match
dapo/seed-107	`6e60484cfd40`	Exact SHA-256 match
dapo/seed-11	`33f158dfabf2`	Exact SHA-256 match
dapo/seed-131	`39f916902470`	Exact SHA-256 match
dapo/seed-23	`08d3a34da450`	Exact SHA-256 match
dapo/seed-37	`bb7fb354be9f`	Exact SHA-256 match
dapo/seed-53	`194c9d2ea0d7`	Exact SHA-256 match
dapo/seed-71	`59406ac609a1`	Exact SHA-256 match
dapo/seed-89	`c290319779e4`	Exact SHA-256 match
drgrpo/seed-107	`8978e087b78f`	Exact SHA-256 match
drgrpo/seed-11	`dbcd0740bc95`	Exact SHA-256 match
drgrpo/seed-131	`4b05547ae98a`	Exact SHA-256 match
drgrpo/seed-23	`4318ffd9026b`	Exact SHA-256 match
drgrpo/seed-37	`26e36e5e915f`	Exact SHA-256 match
drgrpo/seed-53	`5bef04e01ba9`	Exact SHA-256 match
drgrpo/seed-71	`a8cd65ea26f0`	Exact SHA-256 match
drgrpo/seed-89	`1977a08e30b3`	Exact SHA-256 match
grpo/seed-107	`ffcbfffd322a`	Exact SHA-256 match
grpo/seed-11	`b39028ea32b0`	Exact SHA-256 match
grpo/seed-131	`7786d5e94527`	Exact SHA-256 match
grpo/seed-23	`de7dc778c412`	Exact SHA-256 match
grpo/seed-37	`2755e14f26f2`	Exact SHA-256 match
grpo/seed-53	`0a4145834057`	Exact SHA-256 match
grpo/seed-71	`821fa6b4504a`	Exact SHA-256 match
grpo/seed-89	`f88da35f8939`	Exact SHA-256 match
gspo/seed-107	`2b521a728689`	Exact SHA-256 match

Scientific unit	Public commit prefix	Manifest verification
gspo/seed-11	`f064274b7c79`	Exact SHA-256 match
gspo/seed-131	`5753775e1976`	Exact SHA-256 match
gspo/seed-23	`d1a6f1879bde`	Exact SHA-256 match
gspo/seed-37	`a9c9ee88756d`	Exact SHA-256 match
gspo/seed-53	`6b58a60fb73d`	Exact SHA-256 match
gspo/seed-71	`c0c0b968a61a`	Exact SHA-256 match
gspo/seed-89	`40695b92925a`	Exact SHA-256 match

The manifests specify thirty optimizer steps. P11 therefore does not satisfy the report's Tier A threshold of at least one hundred steps, despite its eight-seed design. The reported contrast, confidence interval, power estimate and null result remain unchanged. Failed and superseded attempts are not pooled with the accepted forty units.

I.4 Recovered campaign evidence

Six unchanged original files resolved five named primary-file gaps in the retained-source audit. Their private filesystem and export metadata are not included here. The scientific availability result is narrower than validation of every claim: LAB-Bench records 450 correct of 1,967; AgentDojo records 88 utility passes across 97 benign episodes, with security evaluation false and no held-out claim. The recovered training-identity note explicitly disclaims content decontamination and does not provide the dirty source diff.

Bounded stored-payload checks cover 29 explicit file-reference records across 27 targets, 1,979 E8 archive/local bindings and 525 E10 archive-member bindings. The selected 1,967 E8 grades and 97 E10 traces reproduce the stored success counts of 450 and 88. E8's 1,259 unparsed-answer total remains diagnostic-supported rather than independently recalculated from the reduced grade rows. These are structural, hash and tally checks, not model execution, scorer reruns or independent semantic grading.

For E14, the source-side record contains 4,428 dispositions, 4,426 accepted judged rows and 2,271 successes. The official judged-row score is 2,271/4,426 = 51.31%; the all-disposition diagnostic is 2,271/4,428 = 51.29%, counting two missing-verdict rows as failures. The recovered terminal note incorrectly associates the official decimal with the full denominator. The erratum remains explicit, the original source is unchanged, and strict-contract score is not inferred from terminal closure.

The recovered finish-era chronology precedes the later E4 rerun and cannot verify that later execution. The later one-hundred-trial zero-reward account remains a separate re-

ported result with raw-trajectory limits. The three original training-log files are now available locally and match their identity-receipt hashes (§B.11), while remaining withheld from this package. The dirty execution source and exact consumed training rows remain unresolved. The retained source-envelope text-overlap check does not establish global or semantic decontamination (§4.5).

I.5 Preserved C1 result and residual limits

The C1 parser-defined endpoint remains 11/64. The conservative review supports three numerical recovery witnesses on the same denominator; these counts are separate and neither establishes training improvement. The sixty-four reference classifications, eleven event records, scientific hashes and disagreements remain in the included case ledger. Historical V2 findings remain separate and unpooled.

This package excludes private provider exports, authenticated inventory and reconciliation ledgers, raw access/budget chronologies, private notebook links, original recovery-export wrappers, personal signature data and account identifiers. Omission is a publication boundary, not evidence that a scientific result failed. Conversely, a retained source reference or checksum is not proof that the cited bytes are publicly available or that all claims have been independently verified. The public PDF has a distinct title and filename and does not replace the preserved historical manuscript or certify institutional approval.

Appendix J

Number-to-Artifact Provenance

This registry covers selected numeric token occurrences, not every number or scientific claim in the thesis. The preserved corrected review auditor, with four documented token-wording updates and native-first E14 display formatting, generated this table and `provenance_audit.json`, which lists each registered token, its check and the cited files' full paths and SHA-256 hashes. A PASS means the token appears verbatim in its chapter and satisfies its named check; it does not establish independent scientific verification. Methods: R recomputed from rows (counts, means, SDs, Wilson, Fisher, t, TOST, ANOVA, McNemar, sign-flip, cluster bootstrap, `git apply --stat`); S stored summary field; C hyperparameter matched in the runner code; T numeric transcription in the cited source report; P selected cited-prose tokens matched to a source or another registered check; A arithmetic from printed counts, without independently checking those inputs against an artifact; W withheld source, not checked. CONTEXT includes definitions and unverified printed inputs; these tokens are not independently checked and are excluded from passing-check counts. Σ marks the SHA-256 of a group's sorted `sha256 path` lines. Hashes bind the author's checkout; Appendix I states which files the public package includes.

On 11 October, the ESA review auditor checked these chapters against retained artifacts. This registry covers selected numerical claims; the correction ledger records other prose and caption changes. No model or scorer was rerun. The frozen auditor source, four token-wording updates and E14 formatter change are retained in the review workspace.

Number-to-artifact registry for Chapters 1, 4 and 6–9 and Appendices A and F. Of 970 registered token occurrences, 948 checks pass and 22 are context only, not independently checked. The passing checks include 34 calculations from printed counts only. 0 occurrences rest on withheld sources and are not checked; 0 checks fail, 0 are unbound and 0 lack required artifacts. Passing this registry does not verify every numerical thesis claim or authenticate its sources.

Table J.1: Selected numerical token occurrences and their recorded checks.

Location	Values	M	Artifacts	SHA-256 (prefix)	Result
Table 1.1	19	RT	35 files	Σd136e3050c0	19 pass
Table 4.1	2	R	2 files	Σa5f4cf0dddc	2 pass
Table 4.2	18	C	17 files	Σ95031ae100e	18 pass
§6.1	6	PA	2 files	Σ43a03551d6a	6 pass
§6.2	80	P	6 files	Σ35bfa9dae1a	80 pass
§6.3	110	P	14 files	Σ605ff19ee62	110 pass
§6.4	112	RSP	15 files	Σe018267aed4	112 pass
§6.5	210	RP	18 files	Σb7749c57669	207 pass; 3 context
Table 6.1	11	R	samestack_gsm8k_cot.json	ed3022290a87	11 pass
§6 recomputations	43	RT	21 files	Σ7c553cace5c	43 pass
§7.1	36	RST	5 files	Σfa6c68c5ebe	36 pass
§7.2	32	RA	2 files	Σ8429f41bf5b	25 pass; 7 context
§7.3	34	TA	p7_controller.tex	a5caaab4b855	29 pass; 5 context
§7.4	14	A	—	—	11 pass; 3 context
§7.5	11	R	c1_case_ledger.csv	70f48e55a442	10 pass; 1 context
Table 8.1	5	RA	2 files	Σd7797af0cf8	4 pass; 1 context
Table 8.2	14	R	10 files	Σ10e8cbb1b7b	14 pass
§8.2	21	R	5 files	Σ388c689fdb0	21 pass
§8.3	10	RTA	3 files	Σ19c1dd75631	9 pass; 1 context
§8.4	3	R	3 × result.json	Σf6a7ff9171a	3 pass
Table 8.C	18	R	6 × result.json	Σa13e3d43680	18 pass
Table 8.D	6	S	6 × result.json	Σa13e3d43680	6 pass
§8.5	2	S	result.json	3603158797cd	2 pass
Table 8.A	14	R	14 × result.json	Σe3c416e24a2	14 pass
Table 8.B	18	R	14 × paired.json	Σ023282562fb	18 pass
§9.1	23	RA	14 files	Σ5eafca0389e	23 pass
§9.2	6	T	LIMITATIONS_AND_IMPACT.md	c44062ee5dbd	6 pass
Table 9.1	3	RC	6 files	Σe9e99772009	3 pass
Table A.1	1	R	—	—	1 pass
Table A.2	4	S	framework_comparison.json	454b9f3db7c4	4 pass
Table A.3	7	R	modal_results_all.json	522119d906da	7 pass
Table A.4	4	R	groupsize_zvf_sweep.json	4aefae380f2c	4 pass
Table A.5	21	RTA	23 files	Σ78fd633186c	20 pass; 1 context
Table A.6	19	RS	9 files	Σ401a5d3495c	19 pass
Table A.7	3	R	samestack_gsm8k_cot.json	ed3022290a87	3 pass
Table A.8	18	RTA	14 files	Σ201037072c8	18 pass
Table A.10	6	RTA	5 files	Σc1f5919db9f	6 pass
Table F.2	2	S	qp8_fraud.tsv	179d1f36cc88	2 pass
Table F.4	4	R	p8_headline_cis.tsv	1468df0df3fb	4 pass